

# PD-9506GC/9512GC/9524GC Midspan


60W/Port Gigabit Midspan Family for High-Power Powered Devices

## Summary

Microchip's PD-9500GC family is 6, 12 and 24 multiport solution for remote powering of current as well as emerging high power applications. The PD-9500GC is designed specifically to power IEEE 802.11 access points, Pan-Tilt-Zoom (PTZ) and dome cameras, IP videophones, thin clients and other high power Ethernet end terminals with 60W of power. The family solution support IEEE 802.3bt powered devices and is also backward compatible and safe to use with any IEEE 802.3af/at terminal. It can power both existing 10/100Base-T devices and Gigabit devices. With the midspan's plug-and-play installation, they are easy and cost effective to implement leveraging existing Ethernet infrastructure while at the same time providing the assurance of a future proof network.

## Product Features

- IEEE 802.3bt type 3 standard compliant
- IEEE 802.3af/at backward compatible
- PowerView Pro secure, remote SNMP web-based management
- Supports both IPv4 and IPv6 addressing
- Plug-and-play installation

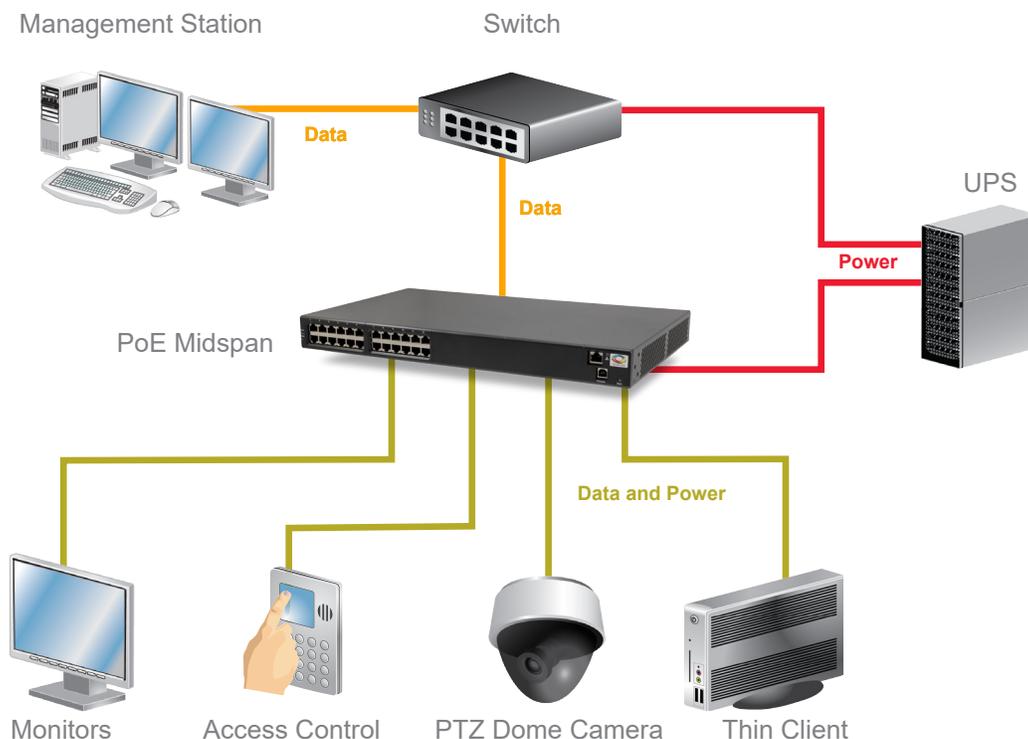

## Specifications

Feature	Description
No. of Ports	6/12/24
Data Rates	10/100/1000 Mbps
Input Power Requirements	AC Input Voltage: 100 to 240 Vac DC Input: 55V (applicable for PD-9512GC and PD-9524GC products)
Dimensions	438 mm x 272 mm x 44 mm 17.3 in x 10.8 in x 1.75 in or 1U
Weight	14.3 lbs (5 kg) - PD-9512GC and PD-9512GC 9.25 lbs (4.2kg) - PD-9506GC
Remote Management	PowerView Pro is included
Indicators	System Indicator: AC Power (Green) Channel Power Indicators: Green-Power supplied over data and spare pairs Orange-Power supplied over data or spare pairs
Connectors	PoE ports and management port: Shielded RJ-45, EIA 568A and 568B Console Port: USB Connector Type B DC Connector: DC Block Terminal Comm. connector: USB-B type-B
Environmental Conditions	Operating Ambient Temperature: Conditions 32°F to 104°F (0°C to 40°C) Operating Humidity: 10% to 90%, Non-condensing Storage Temperature: -4°F to +158°F (-20°C to +70°C) Storage Humidity: 5% to 95%, Non-condensing Operating Altitude: -1000 to 6,561 ft. (-304.8 to 2,000 m)
Warranty	Limited lifetime (see Terms and Conditions)
Regulatory Compliance	IEEE 802.3bt, IEEE 802.3af/at , RoHS Compliant, CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B, EN 55032 Class B (Emissions), EN 55024 (Immunity), VCCI
Safety	UL/IEC/EN 60950-1 (Ed. 2)

## Ordering Information

Product Name	Description	Part Number
PD-9506GC/AC	6-port BT midspan, 4-pairs 60W/port, managed, 10/100/1000 BaseT, AC input	PD-9506GC/AC-US: US plug PD-9506GC/AC-EU: EU plug PD-9506GC/AC-UK: UK plug PD-9506GC/AC-AU: AU plug
PD-9512GC/AC	12-port BT midspan, 4-pairs 60W/port, managed, 10/100/1000 BaseT, AC with, DC input or current sharing	PD-9512GC/AC-US: US plug PD-9512GC/AC-EU: EU plug PD-9512GC/AC-UK: UK plug PD-9512GC/AC-AU: AU plug
PD-9524GC/AC	24-port BT midspan, 4-pairs 60W/port, managed, 10/100/1000 BaseT, AC with, DC input or current sharing	PD-9524GC/AC-US: US plug PD-9524GC/AC-EU: EU plug PD-9524GC/AC-UK: UK plug PD-9524GC/AC-AU: AU plug

## For More Information

[www.microsemi.com](http://www.microsemi.com) or <http://www.microchip.com/design-centers/power-over-ethernet>



The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.  
© 2019, Microchip Technology Incorporated. All Rights Reserved. 9/19

DS00003230A