



# PolarFire<sup>®</sup> SoC CPU Performance Benchmarking

## Introduction


Microchip's PolarFire SoC FPGAs include the industry's RISC-V based Microprocessor Subsystem (MSS) and FPGA fabric that inherits all the features of the PolarFire family. The PolarFire SoC MSS includes 5x 64-bit RISC-V processor cores, AXI Switch, DDR Controller, Fabric Interface Controllers (FIC), and a rich set of peripherals. It also offers an unparalleled combination of low power consumption, thermal efficiency, and defence-grade security for smart, connected systems. It is the first SoC FPGA with a deterministic L2 memory subsystem enabling real-time applications. Built on the award-winning, mid-range, low power PolarFire FPGA architecture, PolarFire SoC devices deliver up to 50% lower power than alternative FPGAs, span from 25k to 460k logic elements, and feature 12.7G transceivers.

PolarFire SoC devices include L1 cache, L2 cache, DDR controller, and eNVM (embedded non-volatile memory) to execute user applications on U54 (Application Processor) cores. The L1 iCache can be used as ITIM (Instruction Tightly Integrated Memory) for code execution. The L2 Cache can be used as LIM (Loosely Integrated Memory) or Scratchpad. The external DDR memory such as LPDDR4 can also be interfaced using the DDR controller. The eNVM can be used for storing instructions and code execution. For more information, see [UG0880: PolarFire SoC FPGA Microprocessor Subsystem \(MSS\) User Guide](#).

This white paper describes CPU performance results based on the industry-standard performance benchmarking suites such as Dhrystone (Bare Metal), CoreMark (Bare Metal and Linux), and CoreMark-PRO (Linux) which are executed on the Application Processor Cores (U54, which uses RISC-V Architecture RV64GC) using the PolarFire SoC Icicle kit. The performance benchmarking suites are compiled with the GCC compiler on the RISC-V platform to evaluate the performance of embedded processors.

The following figure shows the execution methodology for the performance benchmarking suites. These performance suites are executed by applying different levels of optimization flags. All the computations are model-driven runtime (MDR), which uses all the aforementioned flags, trade-offs during the runtime to get the best performance results.

**Figure 1. Execution Methodology for the Performance Benchmarking Suites**

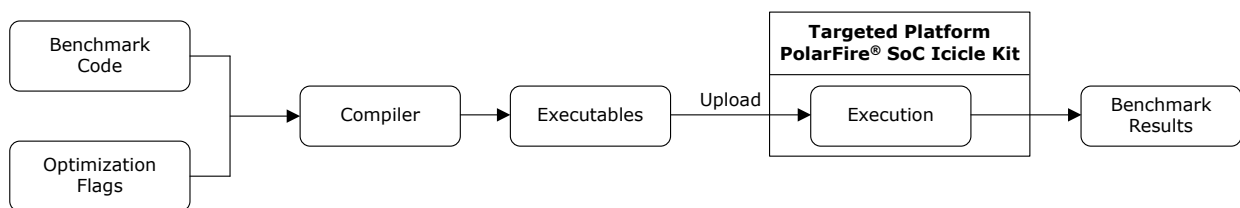

---

---

This white paper provides the summary of results after executing the benchmark applications from LIM, ITIM, eNVM, Scratchpad, and LPDDR4. The following table lists the system configuration common to all the performance benchmark suites.

**Table 1. System Configuration**

System Configuration	Description
Product and Architecture	Icicle kit, RISC-V
Platform	Dhrystone—Bare Metal
	CoreMark—Bare Metal and Linux
	CoreMark-PRO—Linux
CPU Core Frequency	600 MHz
External Memory Access	LPDDR4
LPDDR4 Frequency	800 MHz
Compiler	GCC
Toolchain for Linux	riscv64-oe-linux-gcc (v9.3.0)
Toolchain for Bare Metal	riscv64-unknown-elf-gcc (v8.3.0)



**Attention:** The benchmarking results depend on the tool chains, compiler flags such as optimization level, single core, or quad cores.

---

---

## Table of Contents

---

Introduction.....	1
1. Dhrystone.....	4
1.1. Dhrystone on Bare Metal.....	4
2. CoreMark.....	5
2.1. CoreMark Benchmarking Results using Signed Index.....	5
2.2. CoreMark Benchmarking Results using Unsigned Index.....	6
3. CoreMark-PRO.....	7
3.1. CoreMark-PRO on Linux.....	7
4. Summary of PolarFire SoC Benchmarking Results.....	9
5. Conclusion.....	10
The Microchip Website.....	11
Product Change Notification Service.....	11
Customer Support.....	11
Microchip Devices Code Protection Feature.....	11
Legal Notice.....	12
Trademarks.....	12
Quality Management System.....	13
Worldwide Sales and Service.....	14

## 1. Dhrystone

The industry standard Dhrystone v2.2 is executed on one of the RISC-V CPU cores of the PolarFire SoC target platform. The Dhrystone suite remains intact with the application even after changing the wrapper code that allows different levels of execution timings on the PolarFire SoC Icicle kit. Dhrystone suite is adapted to get the processor performance, which plays an important role in the non-numeric system programming and emulates the processor usage with the help of certain common set of programs. The benchmarking value shows the iterations of the program executed by the processor at a particular time frame and normalizes to per MHz of CPU clock frequency.

The Dhrystone program gets the comparative performance differences between the external and internal memory settings along with the system settings. The Dhrystone suite features a well-structured code base, which takes full advantage of the wrapper code resulting in optimal biased configuration to get the best performance results.

Following are the key features of Dhrystone:

- Well-suited for embedded CPUs
- Provides great comparison of the compiler performances
- Performs synthetic benchmarks to compare different system architectures
- Has a very small binary footprint, which determines the CPU's benchmarking quickly

For more information about Dhrystone, see [en.wikipedia.org/wiki/Dhrystone](https://en.wikipedia.org/wiki/Dhrystone).

### 1.1 Dhrystone on Bare Metal

To execute a benchmarking test suite, it must be self-contained to allow its execution on the hardware directly. This is necessary at the start of an SoC design to evaluate and establish correlations of expected integer performance.

#### 1.1.1 Results

The following table lists the Dhrystone benchmarking results for one Application Processor Core U54 running Bare Metal using the PolarFire SoC Icicle Kit.

**Table 1-1. Dhrystone Benchmarking Results on Bare Metal**

Dhrystone	Bare Metal					
	LIM	ITIM	eNVM	eNVM	Scratchpad	LPDDR4
Memory Section	(1.8 MB)	(28 KB)	(128 KB)	(128 KB)	mem (512 KB)	
Code (main loop is run from)	LIM	ITIM	eNVM	eNVM	Scratchpad	LPDDR4
Stack located in	LIM	Scratchpad	LIM	Scratchpad	Scratchpad	LPDDR4
<b>Dhrystone Result (DMIPS/MHz)</b>	<b>0.58</b>	<b>1.58</b>	<b>0.47</b>	<b>0.975</b>	<b>1.714</b>	<b>1.714</b>
Code Size	Full image size is around 70 KB. Dhrystone main loop is less than 2 KB.					Full image size is around 63 KB
Compiler Flags	-pipe -fno-builtin-printf -mexplicit-relocs -fpredictive-commoning -fprofile-report -fstack-usage -fmem-report -flt-report -fipa-pta -fipa-cp-clone -fdevirtualize-speculatively -fdevirtualize-at-ltrans -fira-region=all -fira-hoist-pressure -fira-loop-pressure -fno-stack-limit -fno-inline -fno-common -falign-functions=4 -ffunction-sections -fdata-sections					

## 2. CoreMark

CoreMark is a benchmarking suite that is intended for the performance of the CPU, when running with specific workloads. The internal CPU architecture is independent of the on-chip memory and peripherals. CoreMark focuses on processor core and cache memory read/write by utilizing the CPU pipeline architecture. The advantage of CoreMark is its size, which allows CoreMark to easily fit in a processor's memory and makes it suitable to get the performance outcome. To evaluate processor performance, CoreMark uses about 20k size of code, which includes I/O computations. All the computations are made at run time. CoreMark mainly focuses on basic read/write operations and integer operations. CoreMark uses realistic workloads. The CoreMark workload comprises of several commonly used algorithms, including:

- Matrix manipulation, to exercise common math operations.
- Linked list manipulation, to exercise the common use of pointers.
- State machine operation, to exercise data-dependent branches.
- Cyclic Redundancy Check (CRC) is a common function in the embedded systems.

The outcome of the CoreMark execution is as follows:

- The four bits of workload tested are matrix manipulation, linked lists, state machines, and CRCs. The output of each stage of the compilers is intended to get the best outcome of the performance results.
- PolarFire SoC device can load the entire test in the cache, DDR, and Flash memory.

The GCC on the RISC-V gives a good performance with -O2 optimization compiler flag and without a compressed extension (RVC).

For more information about CoreMark, see [EEMBC](#).

### 2.1 CoreMark Benchmarking Results using Signed Index

The CoreMark benchmarking results are captured for one Application Processor Core U54 for both Bare Metal and Linux. The following table lists the CoreMark benchmarking results when signed index is used as loop counter. RISC-V is designed to be more efficient in handling the common case loop index variables in the form of "(signed) int". Hence, a typedef in the header file was modified to be a signed data type (`ee_u32`).

**Table 2-1. CoreMark Benchmarking Results when Signed Index is used as Loop Counter**

CoreMark	Bare Metal						Linux
Memory Section	LIM (1.8 MB)	ITIM (28 KB)	eNVM (128 KB)	eNVM (128 KB)	Scratchpad mem (512 KB)	LPDDR4	LPDDR4
Code (main loop is run from)	LIM	ITIM	eNVM	eNVM	Scratchpad	LPDDR4	LPDDR4
Stack located in	LIM	Scratchpad	LIM	Scratchpad	Scratchpad	LPDDR4	LPDDR4
<b>CoreMark Result (CoreMark/MHz)</b>	<b>0.950</b>	<b>3.128</b>	<b>0.950</b>	<b>3.030</b>	<b>3.128</b>	<b>3.128</b>	<b>3.125</b>
Code Size	Full application image size is 70 KB. CoreMark code size is less than 20 KB.					Full image size is around 50 KB	

.....continued			
CoreMark	Bare Metal		Linux
Compiler Flags for Bare Metal	-Wno-maybe-uninitialized -fno-common -funroll-loops -finline-functions -falign-functions=16 -falign-jumps=4 -falign-loops=4 -finline-limit=1000 -fno-if-conversion2 -fselective-scheduling -fno-tree-dominator-opts		
Compiler Flags for Linux	-O3 -O2 -DPERFORMANCE_RUN=1 -DHAS_STDIO -DHAS_TIME_H -DUSE_CLOCK -fno-common -funroll-loops -finline-functions -falign-functions=16 -falign-jumps=4 -falign-loops=4 -finline-limit=1000 -fno-if-conversion2 -fselective-scheduling -fno-tree-dominator-opts -lpthread -DHAS_FLOAT=0 -mtune=sifive-7-series -lrt		

**Note:**

CoreMark application chooses heap or stack during its run. Here, it is configured for stack.

## 2.2 CoreMark Benchmarking Results using Unsigned Index

The following table lists the CoreMark Benchmarking results using default header file (with no modifications to the typedef unsigned int ee\_u32).

**Table 2-2. CoreMark Benchmarking Results when Unsigned Index is used as Loop Counter**

CoreMark	Bare Metal						Linux
Memory Section	LIM (1.8 MB)	ITIM (28 KB)	eNVM (128 KB)	eNVM (128 KB)	Scratchpad mem (512 KB)	LPDDR4	LPDDR4
Code (main loop is run from)	LIM	ITIM	eNVM	eNVM	Scratchpad	LPDDR4	LPDDR4
Stack located in	LIM	Scratchpad	LIM	Scratchpad	Scratchpad	LPDDR4	LPDDR4
<b>CoreMark Result (CoreMark/MHz)</b>	<b>0.92</b>	<b>2.645</b>	<b>0.916</b>	<b>2.568</b>	<b>2.65</b>	<b>2.65</b>	<b>2.56</b>
Code Size	Full application image size is 70 KB. CoreMark code size is less than 20 KB.					Full image size is around 50 KB	
Compiler Flags for Bare Metal	-Wno-maybe-uninitialized -fno-common -funroll-loops -finline-functions -falign-functions=16 -falign-jumps=4 -falign-loops=4 -finline-limit=1000 -fno-if-conversion2 -fselective-scheduling -fno-tree-dominator-opts						
Compiler Flags for Linux	-O3 -O2 -DPERFORMANCE_RUN=1 -DHAS_STDIO -DHAS_TIME_H -DUSE_CLOCK -fno-common -funroll-loops -finline-functions -falign-functions=16 -falign-jumps=4 -falign-loops=4 -finline-limit=1000 -fno-if-conversion2 -fselective-scheduling -fno-tree-dominator-opts -lpthread -DHAS_FLOAT=0 -mtune=sifive-7-series -lrt						

**Note:**

CoreMark application chooses heap or stack during its run. Here, it is configured for stack.

### 3. CoreMark-PRO

CoreMark-PRO is a comprehensive, advanced processor benchmark working with CoreMark. When a CoreMark stresses the CPU pipeline, CoreMark-PRO tests the entire processor and memory subsystem, adding support for the following:

- Multi-core and a combination of integer
- Floating-point workloads
- Data sets for using larger memory subsystems

Data sets, depending on the task, ranging from 42 kB to 3 MB, stresses the multi-core devices that the code can launch multiple threads, with parallelism in the workload.

The CoreMark-PRO contains five integer workloads and four popular floating-point workloads. The integer workloads include JPEG compression, ZIP compression, an XML parser, the SHA-256 Secure Hash Algorithm (SHA), and a more memory-intensive version of the original CoreMark. The floating-point workloads include a Fast Fourier Transform (FFT), a linear algebra routine derived from LINPACK, a greatly improved version of the Livermore loops benchmark, and a neural net algorithm to evaluate patterns.

The CoreMark-PRO execution utilizes the MultiBench comprehensive suite to evaluate the performance of PolarFire SoC device. The MultiBench comprehensive suite utilizes Multi Instance Test Harness (MITH), which provides a framework to coordinate scalability analysis. The MultiBench framework evaluates the performance of scalability, Single-core, Multi-core, memory bandwidth, OS scheduling support, and compiler benchmarking.

For more information about CoreMark-PRO, see [EEMBC](#).

#### 3.1 CoreMark-PRO on Linux

To execute the CoreMark-PRO on Linux platform for optimal benchmarking results on PolarFire SoC Icicle kit, run each workload with single/multi workers, configure the number of workers to get the better scaling for each workload. These values are obtained by passing workloads using XCMD flags as XCMD='-c4 -w4 -v1 -i4 ' to the make command, which in turn utilizes the Perl script to get the values as listed in [Table 3-1](#).

##### 3.1.1 Results

The following table lists the CoreMark-PRO benchmarking results using four application U54 cores. CoreMark-PRO provides a score (Iterations/Sec) for Multi-core and Single-core with a scaling factor. The scaling factor depends on the workload. For more information about the workloads and scaling factor, see [EEMBC CoreMark-PRO User Guide](#).

**Table 3-1. CoreMark-PRO Benchmarking Results on Linux**

Workload	Multi-Core (Iterations/sec)	Single-core (Iterations/sec)	Scaling
core	0.38	0.10	3.80
loops-all-mid-10K-sp	0.61	0.20	3.05
nnet_test	0.93	0.28	3.32
parser-125k	6.76	2.31	2.93
zip-test	20.51	5.85	5.85
linear_alg-mid-100x100-sp	23.47	6.12	3.83
sha-test	25.51	7.75	3.29
radix2-big-64k	30.88	19.16	1.61
cjpeg-rose7-preset	47.85	12.53	3.82
<b>Results</b>	<b>768.39</b>	<b>243.80</b>	<b>3.15</b>

The following figure shows the CoreMark-PRO execution.

Figure 3-1. CoreMark-PRO Execution


```

WORKLOAD RESULTS TABLE
-----
Workload Name                               MultiCore (iter/s)  SingleCore (iter/s)  Scaling
-----
cjpeg-rose7-preset                          47.85               12.53                3.82
core                                          0.38                0.10                3.80
linear_alg-mid-100x100-sp                   23.47               6.12                 3.83
loops-all-mid-10k-sp                       0.61                0.20                3.05
nnet_test                                    0.93                0.28                3.32
parser-125k                                  6.76                2.31                2.93
radix2-big-64k                              30.88               19.16                1.61
sha-test                                     25.51               7.75                 3.29
zip-test                                     20.51               5.85                 3.51

MARK RESULTS TABLE
-----
Mark Name                                     MultiCore           SingleCore          Scaling
-----
CoreMark-PRO                                 768.39             243.80              3.15
make[2]: Leaving directory '/home/benchmarking/coremark-pro-master'
make[1]: Leaving directory '/home/benchmarking/coremark-pro-master'
root@icicle-kit-es-sd:/home/benchmarking/coremark-pro-master# lscpu
Architecture:      riscv64
Byte Order:        Little Endian
CPU(s):            4
On-line CPU(s) list: 0-3
Thread(s) per core: 4
Core(s) per socket: 1
Socket(s):         1
L1d cache:        32 KiB
L1i cache:        32 KiB
root@icicle-kit-es-sd:/home/benchmarking/coremark-pro-master#
    
```

The following figure shows the representation of CoreMark-PRO benchmarking results.

Figure 3-2. Comparison Between Mutli-core and Single-core

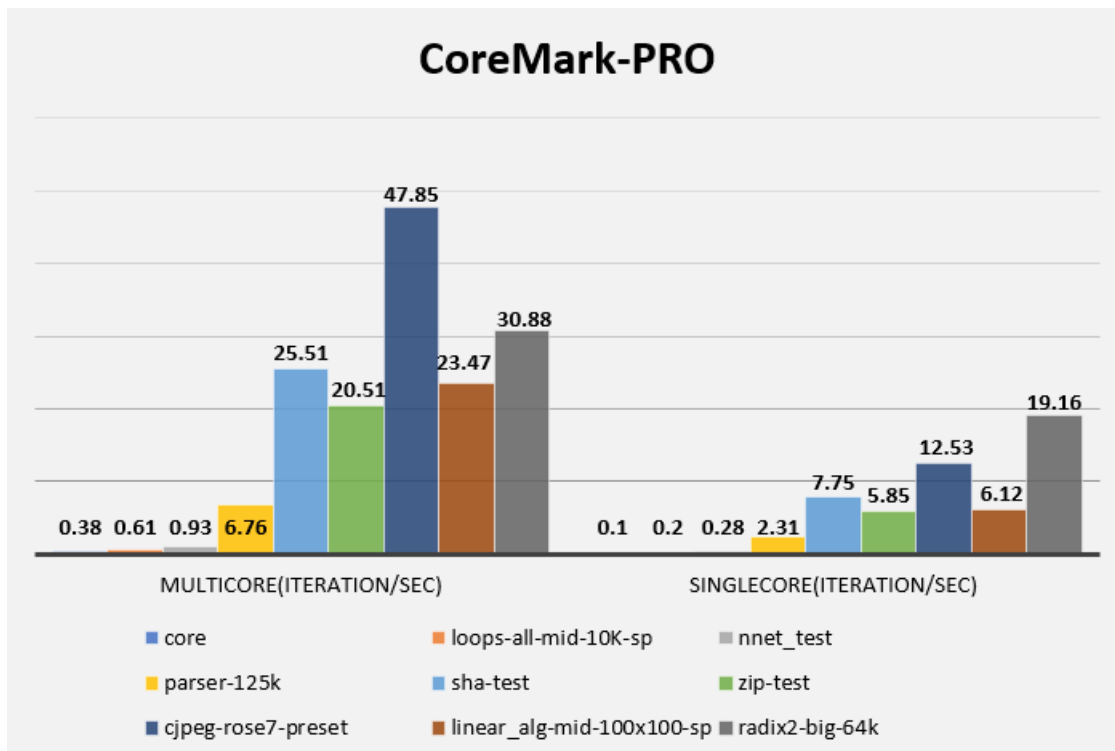



### 4. Summary of PolarFire SoC Benchmarking Results

The following table lists the summary of results of benchmarking suites. The best performance results are achieved by running the application code from the Scratchpad or LPDDR4.

**Table 4-1. Summary of PolarFire SoC Benchmarking Results**

Benchmarks	Platform	Result
Dhrystone	Bare Metal	1.714 DMIPS/MHz
CoreMark	Bare Metal	3.128 CoreMarks/MHz
	Linux	3.125 CoreMarks/MHz
CoreMark-PRO	Linux	Multi-Core 768.39 (Iterations/sec)
		Single-Core 243.80 (Iterations/sec)

### 5. Conclusion

This white paper describes the toolchain, compiler and optimization flags, and the process for running benchmarks such as Dhrystone, CoreMark, and CoreMark-PRO using the PolarFire SoC Icicle kit.

The best performance results are achieved when code is executed from L2 Scratchpad memory or LPDDR4 memory. When executing applications from LIM, the instructions and data are not cached. LIM is intended for executing applications with deterministic behavior.

---

## The Microchip Website

---

Microchip provides online support via our website at [www.microchip.com/](http://www.microchip.com/). This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

---

## Product Change Notification Service

---

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to [www.microchip.com/pcn](http://www.microchip.com/pcn) and follow the registration instructions.

---

## Customer Support

---

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: [www.microchip.com/support](http://www.microchip.com/support)

---

## Microchip Devices Code Protection Feature

---

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

## Legal Notice

---

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

---

## Trademarks

---

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-7254-4

---

---

## Quality Management System

---

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
<p><b>Corporate Office</b> 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Tel: 480-792-7277 Technical Support: <a href="http://www.microchip.com/support">www.microchip.com/support</a> Web Address: <a href="http://www.microchip.com">www.microchip.com</a></p> <p><b>Atlanta</b> Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455</p> <p><b>Austin, TX</b> Tel: 512-257-3370</p> <p><b>Boston</b> Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088</p> <p><b>Chicago</b> Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075</p> <p><b>Dallas</b> Addison, TX Tel: 972-818-7423 Fax: 972-818-2924</p> <p><b>Detroit</b> Novi, MI Tel: 248-848-4000</p> <p><b>Houston, TX</b> Tel: 281-894-5983</p> <p><b>Indianapolis</b> Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453 Tel: 317-536-2380</p> <p><b>Los Angeles</b> Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Tel: 951-273-7800</p> <p><b>Raleigh, NC</b> Tel: 919-844-7510</p> <p><b>New York, NY</b> Tel: 631-435-6000</p> <p><b>San Jose, CA</b> Tel: 408-735-9110 Tel: 408-436-4270</p> <p><b>Canada - Toronto</b> Tel: 905-695-1980 Fax: 905-695-2078</p>	<p><b>Australia - Sydney</b> Tel: 61-2-9868-6733</p> <p><b>China - Beijing</b> Tel: 86-10-8569-7000</p> <p><b>China - Chengdu</b> Tel: 86-28-8665-5511</p> <p><b>China - Chongqing</b> Tel: 86-23-8980-9588</p> <p><b>China - Dongguan</b> Tel: 86-769-8702-9880</p> <p><b>China - Guangzhou</b> Tel: 86-20-8755-8029</p> <p><b>China - Hangzhou</b> Tel: 86-571-8792-8115</p> <p><b>China - Hong Kong SAR</b> Tel: 852-2943-5100</p> <p><b>China - Nanjing</b> Tel: 86-25-8473-2460</p> <p><b>China - Qingdao</b> Tel: 86-532-8502-7355</p> <p><b>China - Shanghai</b> Tel: 86-21-3326-8000</p> <p><b>China - Shenyang</b> Tel: 86-24-2334-2829</p> <p><b>China - Shenzhen</b> Tel: 86-755-8864-2200</p> <p><b>China - Suzhou</b> Tel: 86-186-6233-1526</p> <p><b>China - Wuhan</b> Tel: 86-27-5980-5300</p> <p><b>China - Xian</b> Tel: 86-29-8833-7252</p> <p><b>China - Xiamen</b> Tel: 86-592-2388138</p> <p><b>China - Zhuhai</b> Tel: 86-756-3210040</p>	<p><b>India - Bangalore</b> Tel: 91-80-3090-4444</p> <p><b>India - New Delhi</b> Tel: 91-11-4160-8631</p> <p><b>India - Pune</b> Tel: 91-20-4121-0141</p> <p><b>Japan - Osaka</b> Tel: 81-6-6152-7160</p> <p><b>Japan - Tokyo</b> Tel: 81-3-6880-3770</p> <p><b>Korea - Daegu</b> Tel: 82-53-744-4301</p> <p><b>Korea - Seoul</b> Tel: 82-2-554-7200</p> <p><b>Malaysia - Kuala Lumpur</b> Tel: 60-3-7651-7906</p> <p><b>Malaysia - Penang</b> Tel: 60-4-227-8870</p> <p><b>Philippines - Manila</b> Tel: 63-2-634-9065</p> <p><b>Singapore</b> Tel: 65-6334-8870</p> <p><b>Taiwan - Hsin Chu</b> Tel: 886-3-577-8366</p> <p><b>Taiwan - Kaohsiung</b> Tel: 886-7-213-7830</p> <p><b>Taiwan - Taipei</b> Tel: 886-2-2508-8600</p> <p><b>Thailand - Bangkok</b> Tel: 66-2-694-1351</p> <p><b>Vietnam - Ho Chi Minh</b> Tel: 84-28-5448-2100</p>	<p><b>Austria - Wels</b> Tel: 43-7242-2244-39 Fax: 43-7242-2244-393</p> <p><b>Denmark - Copenhagen</b> Tel: 45-4485-5910 Fax: 45-4485-2829</p> <p><b>Finland - Espoo</b> Tel: 358-9-4520-820</p> <p><b>France - Paris</b> Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79</p> <p><b>Germany - Garching</b> Tel: 49-8931-9700</p> <p><b>Germany - Haan</b> Tel: 49-2129-3766400</p> <p><b>Germany - Heilbronn</b> Tel: 49-7131-72400</p> <p><b>Germany - Karlsruhe</b> Tel: 49-721-625370</p> <p><b>Germany - Munich</b> Tel: 49-89-627-144-0 Fax: 49-89-627-144-44</p> <p><b>Germany - Rosenheim</b> Tel: 49-8031-354-560</p> <p><b>Israel - Ra'anana</b> Tel: 972-9-744-7705</p> <p><b>Italy - Milan</b> Tel: 39-0331-742611 Fax: 39-0331-466781</p> <p><b>Italy - Padova</b> Tel: 39-049-7625286</p> <p><b>Netherlands - Drunen</b> Tel: 31-416-690399 Fax: 31-416-690340</p> <p><b>Norway - Trondheim</b> Tel: 47-72884388</p> <p><b>Poland - Warsaw</b> Tel: 48-22-3325737</p> <p><b>Romania - Bucharest</b> Tel: 40-21-407-87-50</p> <p><b>Spain - Madrid</b> Tel: 34-91-708-08-90 Fax: 34-91-708-08-91</p> <p><b>Sweden - Gothenberg</b> Tel: 46-31-704-60-40</p> <p><b>Sweden - Stockholm</b> Tel: 46-8-5090-4654</p> <p><b>UK - Wokingham</b> Tel: 44-118-921-5800 Fax: 44-118-921-5820</p>