

---

**Macro Library User Guide for PolarFire® FPGA**

---

## Introduction

---

This macro library guide supports the PolarFire® FPGA family. See the Microchip website for macro guides for other families.

This guide follows a naming convention for sequential macros that is unambiguous and extensible, making it possible to understand the function of the macros by their name alone.

The first two mandatory characters of the macro name will indicate the basic macro function:

- DF - D-type flip-flop
- DL - D-type latch

The next mandatory character indicates the output polarity:

- I - output inverted (QN with bubble)
- N - output non-inverted (Q without bubble)

The next mandatory number indicates the polarity of the clock or gate:

- 1 - rising edge triggered flip-flop or transparent high latch (non-bubbled)
- 0 - falling edge triggered flip-flop or transparent low latch (bubbled)

The next two optional characters indicate the polarity of the Enable pin, if present:

- E0 - active low enable (bubbled)
- E1 - active high enable (non-bubbled)

The next two optional characters indicate the polarity of the asynchronous Preset pin, if present:

- P0 - active low asynchronous preset (bubbled)
- P1 - active high asynchronous preset (non-bubbled)


The next two optional characters indicate the polarity of the asynchronous Clear pin, if present:

- C0 - active low asynchronous clear (bubbled)
- C1 - active high asynchronous clear (non-bubbled)

All sequential and combinatorial macros (except MX4 and XOR8) use one logic element in the PolarFire FPGA family.

As an example, the macro DFN1E1C0 indicates a D-type flip-flop (DF) with a non-inverted (N) Q output, positive-edge triggered (1), with Active High Clock Enable (E1) and Active Low Asynchronous Clear (C0). See the following table.

Figure 1. Naming Convention

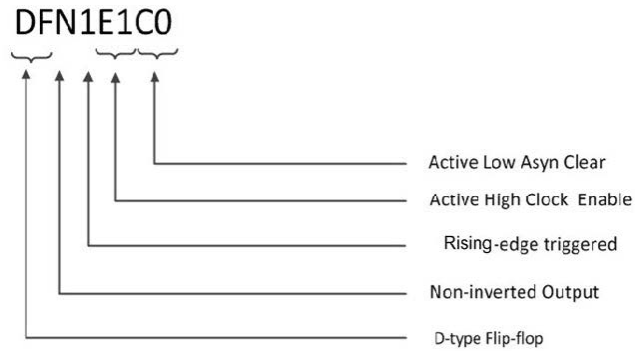

The truth table states in this User Guide are defined as follows:

| State | Meaning                                         |
|-------|-------------------------------------------------|
| 0     | Logic "0"                                       |
| 1     | Logic "1"                                       |
| X     | Do not Care (for Inputs), Unknown (for Outputs) |
| Z     | High Impedance                                  |

User Parameter/Generics

#### **WARNING\_MSGS\_ON**

This feature enables you to disable the warning messages display. Default is ON ('True' in VHDL and '1' in Verilog).

## Table of Contents

|                                                |    |
|------------------------------------------------|----|
| Introduction.....                              | 1  |
| 1. Combinatorial Logic.....                    | 6  |
| 1.1. AND2.....                                 | 6  |
| 1.2. AND3.....                                 | 6  |
| 1.3. AND4.....                                 | 7  |
| 1.4. ARI1.....                                 | 8  |
| 1.5. BUFD.....                                 | 10 |
| 1.6. BUFF.....                                 | 10 |
| 1.7. CFG1/2/3/4 and LUTs (Look-Up Tables)..... | 11 |
| 1.8. INV.....                                  | 13 |
| 1.9. INVD.....                                 | 14 |
| 1.10. MX2.....                                 | 14 |
| 1.11. MX4.....                                 | 15 |
| 1.12. NAND2.....                               | 16 |
| 1.13. NAND3.....                               | 16 |
| 1.14. NAND4.....                               | 17 |
| 1.15. NOR2.....                                | 18 |
| 1.16. NOR3.....                                | 18 |
| 1.17. NOR4.....                                | 19 |
| 1.18. OR2.....                                 | 20 |
| 1.19. OR3.....                                 | 20 |
| 1.20. OR4.....                                 | 21 |
| 1.21. XOR2.....                                | 22 |
| 1.22. XOR3.....                                | 22 |
| 1.23. XOR4.....                                | 23 |
| 1.24. XOR8.....                                | 24 |
| 2. Sequential Logic.....                       | 25 |
| 2.1. DFN1.....                                 | 25 |
| 2.2. DFN1C0.....                               | 25 |
| 2.3. DFN1E1.....                               | 26 |
| 2.4. DFN1E1C0.....                             | 27 |
| 2.5. DFN1E1P0.....                             | 27 |
| 2.6. DLN1.....                                 | 28 |
| 2.7. DLN1C0.....                               | 29 |
| 2.8. DLN1P0.....                               | 29 |
| 2.9. SLE.....                                  | 30 |
| 3. I/O.....                                    | 32 |
| 3.1. BIBUF.....                                | 32 |
| 3.2. BIBUF_DIFF.....                           | 32 |
| 3.3. CLKBIBUF.....                             | 33 |
| 3.4. CLKBUF.....                               | 33 |
| 3.5. CLKBUF_DIFF.....                          | 34 |
| 3.6. GCLKBUF.....                              | 34 |

|       |                                          |    |
|-------|------------------------------------------|----|
| 3.7.  | GCLKBUF_DIFF.....                        | 35 |
| 3.8.  | INBUF.....                               | 35 |
| 3.9.  | INBUF_DIFF.....                          | 36 |
| 3.10. | OUTBUF.....                              | 36 |
| 3.11. | OUTBUF_DIFF.....                         | 37 |
| 3.12. | TRIBUFF.....                             | 37 |
| 3.13. | TRIBUFF_DIFF.....                        | 38 |
| 3.14. | UJTAG.....                               | 38 |
| 3.15. | UJTAG_SEC.....                           | 40 |
| 4.    | Clocking.....                            | 42 |
| 4.1.  | CLKBIBUF.....                            | 42 |
| 4.2.  | CLKBUF.....                              | 42 |
| 4.3.  | CLKBUF_DIFF.....                         | 43 |
| 4.4.  | CLKINT.....                              | 43 |
| 4.5.  | CLKINT_PRESERVE.....                     | 44 |
| 4.6.  | GCLKBUF.....                             | 44 |
| 4.7.  | GCLKBUF_DIFF.....                        | 45 |
| 4.8.  | GCLKINT.....                             | 45 |
| 4.9.  | RCLKINT.....                             | 46 |
| 4.10. | RGCLKINT.....                            | 46 |
| 5.    | Special.....                             | 48 |
| 5.1.  | FCEND_BUFF.....                          | 48 |
| 5.2.  | FCINIT_BUFF.....                         | 48 |
| 5.3.  | PF_SPI.....                              | 49 |
| 5.4.  | SC_STATUS.....                           | 50 |
| 6.    | RAM1K20.....                             | 51 |
| 6.1.  | Functionality.....                       | 51 |
| 6.2.  | RAM64x12.....                            | 59 |
| 7.    | MACC_PA.....                             | 62 |
| 7.1.  | Features.....                            | 62 |
| 7.2.  | MACC_PA_BC_ROM.....                      | 68 |
| 7.3.  | Features.....                            | 68 |
| 7.4.  | Parameters.....                          | 69 |
| 8.    | Revision History.....                    | 74 |
| 9.    | Microchip FPGA Technical Support.....    | 75 |
| 9.1.  | Customer Service.....                    | 75 |
| 9.2.  | Customer Technical Support.....          | 75 |
| 9.3.  | Website.....                             | 75 |
| 9.4.  | Outside the U.S.....                     | 75 |
|       | The Microchip Website.....               | 76 |
|       | Product Change Notification Service..... | 76 |

Customer Support..... 76

Microchip Devices Code Protection Feature..... 76

Legal Notice..... 77

Trademarks..... 77

Quality Management System..... 78

Worldwide Sales and Service..... 79

# 1. Combinatorial Logic

1.1

**AND2**  
2-Input AND.  
Figure 1-1. AND2

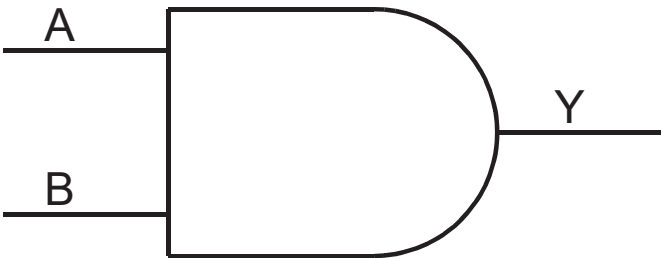


Table 1-1. AND2 I/O

| Inputs | Output |
|--------|--------|
| A, B   | Y      |

Table 1-2. AND2 TRUTH TABLE

| A | B | Y |
|---|---|---|
| X | 0 | 0 |
| 0 | X | 0 |
| 1 | 1 | 1 |

1.2

**AND3**  
3-Input AND.

Figure 1-2. AND3

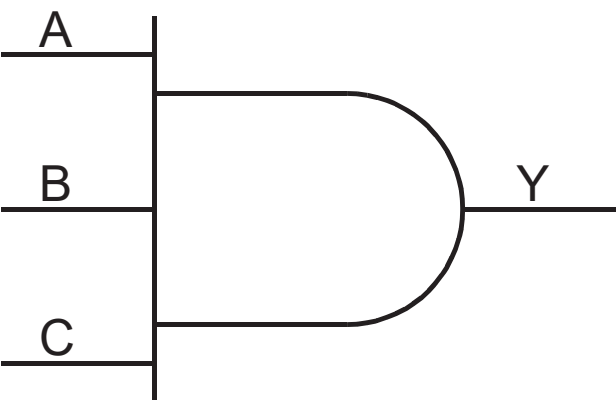


Table 1-3. AND3 I/O

| Input   | Output |
|---------|--------|
| A, B, C | Y      |

Table 1-4. AND3 TRUTH TABLE

| A | B | C | Y |
|---|---|---|---|
| X | X | 0 | 0 |
| X | 0 | X | 0 |
| 0 | X | X | 0 |
| 1 | 1 | 1 | 1 |

1.3

AND4

4-Input AND.

Figure 1-3. AND4

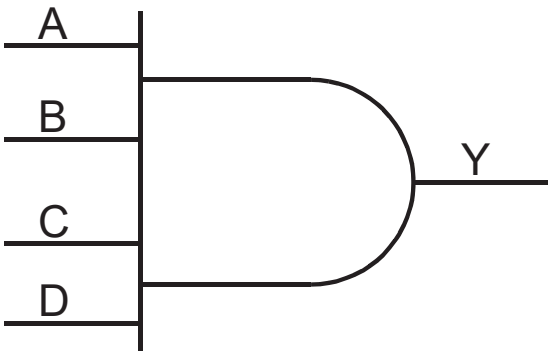


Table 1-5. AND4 I/O

| Input      | Output |
|------------|--------|
| A, B, C, D | Y      |

Table 1-6. AND4 TRUTH TABLE

| A | B | C | D | Y |
|---|---|---|---|---|
| X | X | X | 0 | 0 |
| X | X | 0 | X | 0 |
| X | 0 | X | X | 0 |
| 0 | X | X | X | 0 |
| 1 | 1 | 1 | 1 | 1 |

## 1.4 ARI1

The ARI1 macro is responsible for representing all arithmetic operations in the pre-layout phase.

Figure 1-4. ARI1

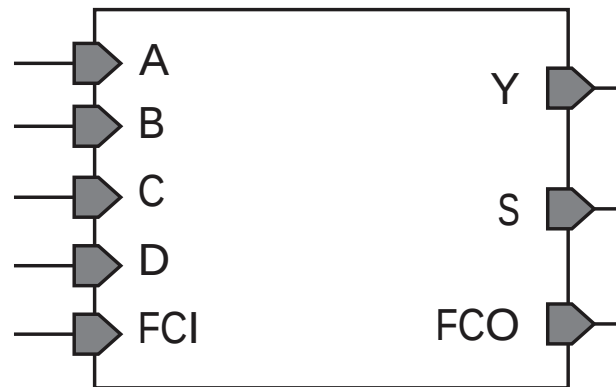


Table 1-7. ARI1 I/O

| Input           | Output    |
|-----------------|-----------|
| A, B, C, D, FCI | Y, S, FCO |

The ARI1 cell has a 20bit INIT string parameter that is used to configure its functionality. The interpretation of the 16 LSB of the INIT string is shown in the table below. F0 is the value of Y when A = 0 and F1 is the value of Y when A = 1.

**Table 1-8. INTERPRETATION OF 16 LSB OF THE INIT STRING FOR ARI1**

| ADCB | Y        |    |
|------|----------|----|
| 0000 | INIT[0]  | F0 |
| 0001 | INIT[1]  |    |
| 0010 | INIT[2]  |    |
| 0011 | INIT[3]  |    |
| 0100 | INIT[4]  |    |
| 0101 | INIT[5]  |    |
| 0110 | INIT[6]  |    |
| 0111 | INIT[7]  |    |
| 1000 | INIT[8]  | F1 |
| 1001 | INIT[9]  |    |
| 1010 | INIT[10] |    |
| 1011 | INIT[11] |    |
| 1100 | INIT[12] |    |
| 1101 | INIT[13] |    |
| 1110 | INIT[14] |    |
| 1111 | INIT[15] |    |

**Table 1-9. ARI1 TRUTH TABLE FOR S**

| Y | FCI | S |
|---|-----|---|
| 0 | 0   | 0 |
| 0 | 1   | 1 |
| 1 | 0   | 1 |
| 1 | 1   | 0 |

#### ARI1 LOGIC

The 4 MSB of the INIT string controls the output of the carry bits. The carry is generated using carry propagation and generation bits, which are evaluated according to the tables below.

**Table 1-10. ARI1 INIT[17:16] STRING INTERPRETATION**

| INIT[17] | INIT[16] | G  |
|----------|----------|----|
| 0        | 0        | 0  |
| 0        | 1        | F0 |
| 1        | 0        | 1  |
| 1        | 1        | F1 |

**Table 1-11. ARI1 INIT[19:18] STRING INTERPRETATION**

| INIT[19] | INIT[18] | P |
|----------|----------|---|
| 0        | 0        | 0 |
| 0        | 1        | Y |
| 1        | X        | 1 |


**Table 1-12. FCO TRUTH TABLE**

| P | G | FCI | FCO |
|---|---|-----|-----|
| 0 | G | X   | G   |
| 1 | X | FCI | FCI |

## 1.5 BUFD

Buffer. Note that the compile optimization does not remove this macro.

**Figure 1-5. BUFD**

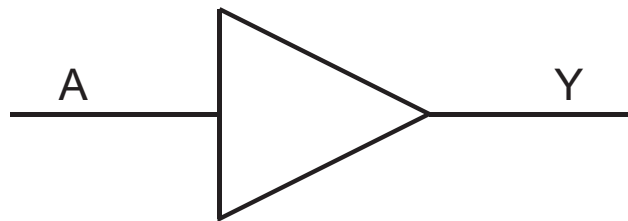

**Table 1-13. BUFD I/O**

| Input | Output |
|-------|--------|
| A     | Y      |

**Table 1-14. BUFD TRUTH TABLE**

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

## 1.6 BUFF

Buffer.

**Figure 1-6. BUFF**

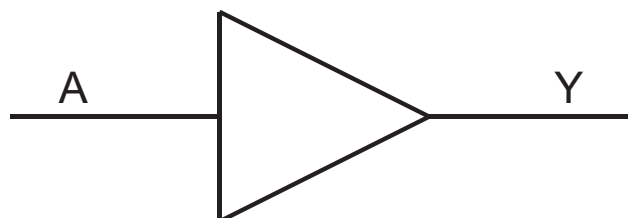


Table 1-15. BUFF I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 1-16. BUFF TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

## 1.7 CFG1/2/3/4 and LUTs (Look-Up Tables)

CFG1, CFG2, CFG3, and CFG4 are post-layout LUTs (Look-up table) used to implement any 1-input, 2-input, 3-input, and 4-input combinational logic functions, respectively. Each of the CFG1/2/3/4 macros has an INIT string parameter that determines the logic functions of the macro. The output Y is dependent on the INIT string parameter and the values of the inputs.

### 1.7.1 CFG2

Post-layout macro used to implement any 2-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A and B. The INIT string parameter is 4 bits wide.

Figure 1-7. CFG2

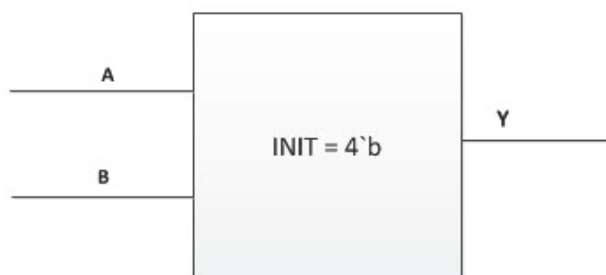


Table 1-17. CFG2 I/O

| Input | Output                     |
|-------|----------------------------|
| A,B   | $Y = f(\text{INIT}, A, B)$ |

Table 1-18. CFG2 INIT STRING INTERPRETATION

| BA | Y       |
|----|---------|
| 00 | INIT[0] |
| 01 | INIT[1] |
| 10 | INIT[2] |
| 11 | INIT[3] |

1.7.2 CFG3

Post-layout macro used to implement any 3-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A, B, and C. The INIT string parameter is 8 bits wide.

Figure 1-8. CFG3

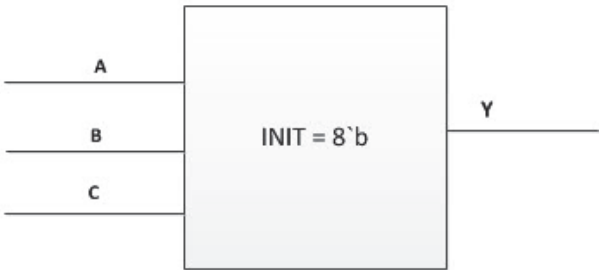


Table 1-19. CFG3 I/O

| Input   | Output               |
|---------|----------------------|
| A, B, C | Y = f (INIT, A,B, C) |

Table 1-20. CFG3 INIT STRING INTERPRETATION

| CBA | Y       |
|-----|---------|
| 000 | INIT[0] |
| 001 | INIT[1] |
| 010 | INIT[2] |
| 011 | INIT[3] |
| 100 | INIT[4] |
| 101 | INIT[5] |
| 110 | INIT[6] |
| 111 | INIT[7] |

1.7.3 CFG4

Post-layout macro used to implement any 4-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A, B, C, and D. The INIT string parameter is 16 bits wide.

Figure 1-9. CFG4

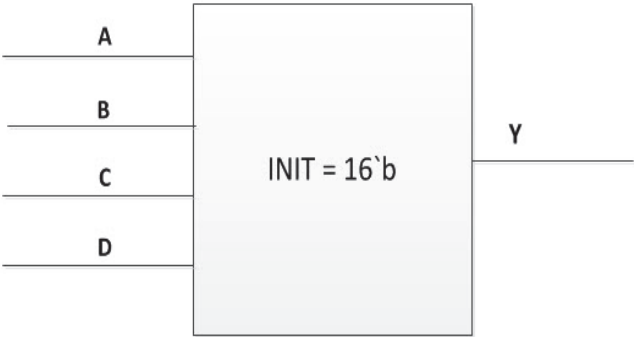


Table 1-21. CFG4 I/O

| Input      | Output                  |
|------------|-------------------------|
| A, B, C, D | Y = f (INIT, A,B, C, D) |

Table 1-22. CFG4 TRUTH TABLE

| DCBA | Y        |
|------|----------|
| 0000 | INIT[0]  |
| 0001 | INIT[1]  |
| 0010 | INIT[2]  |
| 0011 | INIT[3]  |
| 0100 | INIT[4]  |
| 0101 | INIT[5]  |
| 0110 | INIT[6]  |
| 0111 | INIT[7]  |
| 1000 | INIT[8]  |
| 1001 | INIT[9]  |
| 1010 | INIT[10] |
| 1011 | INIT[11] |
| 1100 | INIT[12] |
| 1101 | INIT[13] |
| 1110 | INIT[14] |
| 1111 | INIT[15] |

1.8 INV  
Inverter.

Figure 1-10. INV

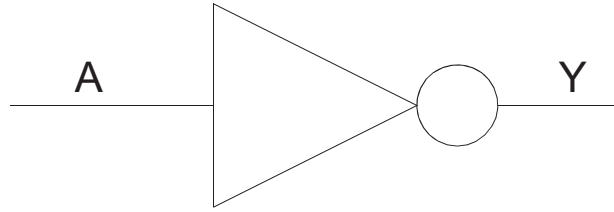


Table 1-23. INV I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 1-24. INV TRUTH TABLE

| A | Y |
|---|---|
| 0 | 1 |
| 1 | 0 |

## 1.9 INVD

Inverter; note that Compile optimization will not remove this macro.

Figure 1-11. INVD

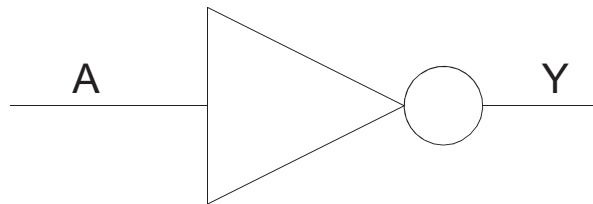


Table 1-25. INVD I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 1-26. INVD TRUTH TABLE

| A | Y |
|---|---|
| 0 | 1 |
| 1 | 0 |

## 1.10 MX2

2 to 1 Multiplexer.

Figure 1-12. MX2

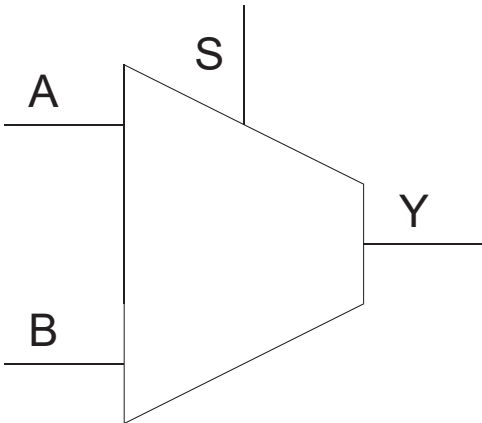


Table 1-27. MX2 I/O

| Input   | Output |
|---------|--------|
| A, B, S | Y      |

Table 1-28. MX2 TRUTH TABLE


| A | B | S | Y |
|---|---|---|---|
| A | X | 0 | A |
| X | B | 1 | B |

1.11 MX4

4 to 1 Multiplexer.

This macro uses two logic modules.

Figure 1-13. MX4

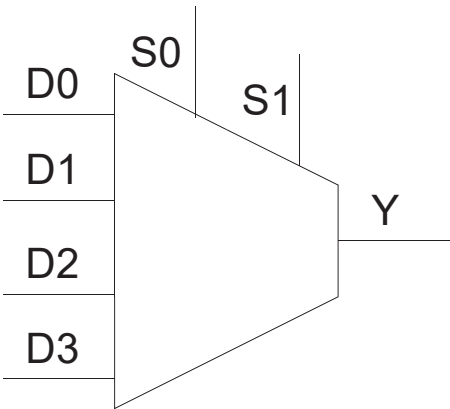

**Table 1-29. MX4 I/O**

| Input                  | Output |
|------------------------|--------|
| D0, D1, D2, D3, S0, S1 | Y      |


**Table 1-30. MX4 TRUTH TABLE**

| D3 | D2 | D1 | D0 | S1 | S0 | Y  |
|----|----|----|----|----|----|----|
| X  | X  | X  | D0 | 0  | 0  | D0 |
| X  | X  | D1 | X  | 0  | 1  | D1 |
| X  | D2 | X  | X  | 1  | 0  | D2 |
| D3 | X  | X  | X  | 1  | 1  | D3 |

## 1.12 NAND2

2-Input NAND.

**Figure 1-14. NAND2**

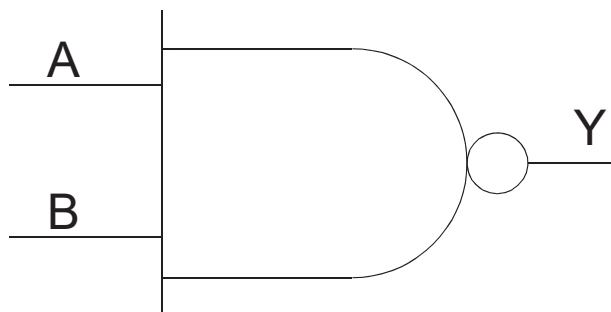

**Table 1-31. NAND2 I/O**

| Input | Output |
|-------|--------|
| A, B  | Y      |

**Table 1-32. NAND2 TRUTH TABLE**

| A | B | Y |
|---|---|---|
| X | 0 | 1 |
| 0 | X | 1 |
| 1 | 1 | 0 |

## 1.13 NAND3

3-Input NANDA.

Figure 1-15. NAND3

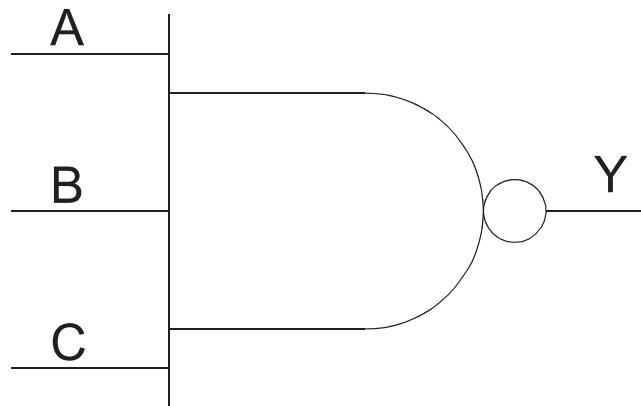


Table 1-33. NAND3 I/O

| Input   | Output |
|---------|--------|
| A, B, C | Y      |

Table 1-34. NAND3 TRUTH TABLE

| A | B | C | Y |
|---|---|---|---|
| X | X | 0 | 1 |
| X | 0 | X | 1 |
| 0 | X | X | 1 |
| 1 | 1 | 1 | 0 |

1.14

NAND4

4-input NAND.

Figure 1-16. NAND4

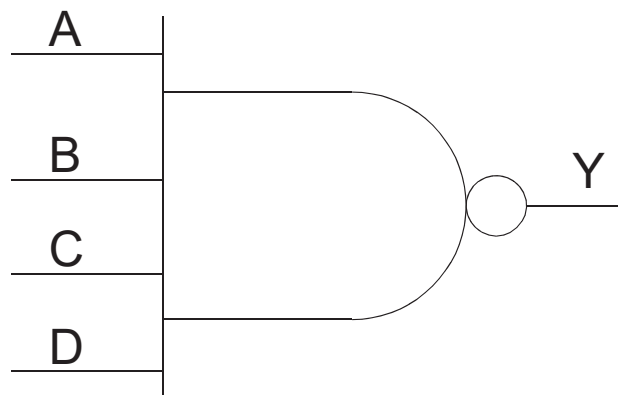


Table 1-35. NAND4 I/O

| Input      | Output |
|------------|--------|
| A, B, C, D | Y      |

Table 1-36. NAND4 TRUTH TABLE

| A | B | C | D | Y |
|---|---|---|---|---|
| X | X | X | 0 | 1 |
| X | X | 0 | X | 1 |
| X | 0 | X | X | 1 |
| 0 | X | X | X | 1 |
| 1 | 1 | 1 | 1 | 0 |

## 1.15 NOR2

2-input NOR.

Figure 1-17. NOR2

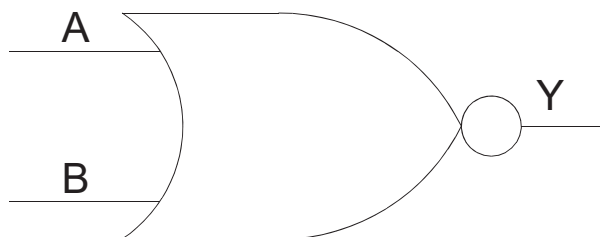


Table 1-37. NOR2 I/O

| Input | Output |
|-------|--------|
| A, B  | Y      |

Table 1-38. NOR2 TRUTH TABLE

| A | B | Y |
|---|---|---|
| 0 | 0 | 1 |
| X | 1 | 0 |
| 1 | X | 0 |

## 1.16 NOR3

3-input NOR.

Figure 1-18. NOR3

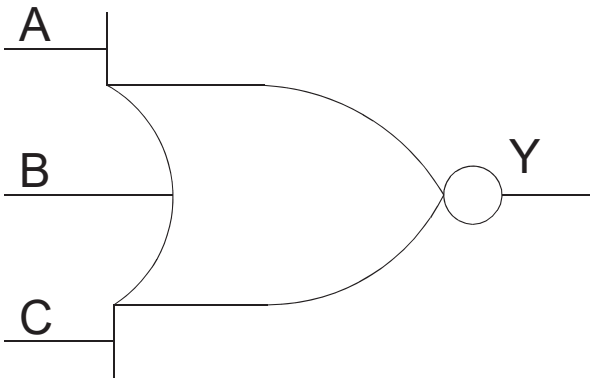


Table 1-39. NOR3 I/O

| Input   | Output |
|---------|--------|
| A, B, C | Y      |

Table 1-40. NOR3 TRUTH TABLE

| A | B | C | Y |
|---|---|---|---|
| 0 | 0 | 0 | 1 |
| X | X | 1 | 0 |
| X | 1 | X | 0 |
| 1 | X | X | 0 |

1.17

NOR4

4-input NOR.

Figure 1-19. NOR3

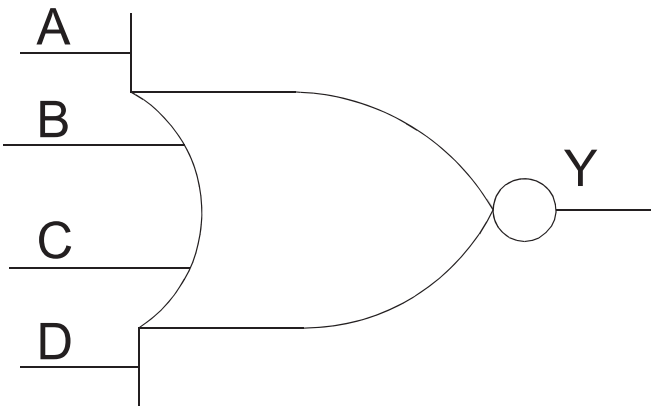


Table 1-41. NOR4 I/O

| Input      | Output |
|------------|--------|
| A, B, C, D | Y      |

Table 1-42. NOR4 TRUTH TABLE

| A | B | C | D | Y |
|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 1 |
| 1 | X | X | X | 0 |
| X | 1 | X | X | 0 |
| X | X | 1 | X | 0 |
| X | X | X | 1 | 0 |

## 1.18 OR2

2-input OR.

Figure 1-20. OR2

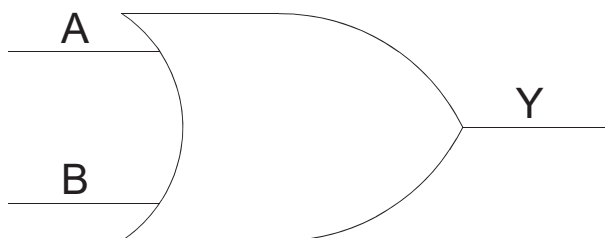


Table 1-43. OR2 I/O

| Input | Output |
|-------|--------|
| A, B  | Y      |

Table 1-44. OR2 TRUTH TABLE

| A | B | Y |
|---|---|---|
| 0 | 0 | 0 |
| X | 1 | 1 |
| 1 | X | 1 |

## 1.19 OR3

3-input OR.

Figure 1-21. OR3

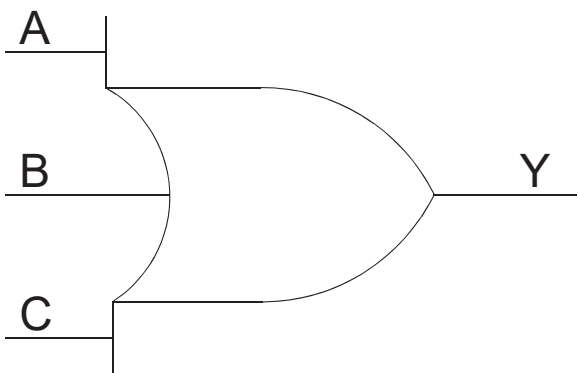


Table 1-45. OR3 I/O

| Input   | Output |
|---------|--------|
| A, B, C | Y      |

Table 1-46. OR3 TRUTH TABLE

| A | B | C | Y |
|---|---|---|---|
| 0 | 0 | 0 | 0 |
| X | X | 1 | 1 |
| X | 1 | X | 1 |
| 1 | X | X | 1 |

1.20

OR4

4-input OR.

Figure 1-22. OR4

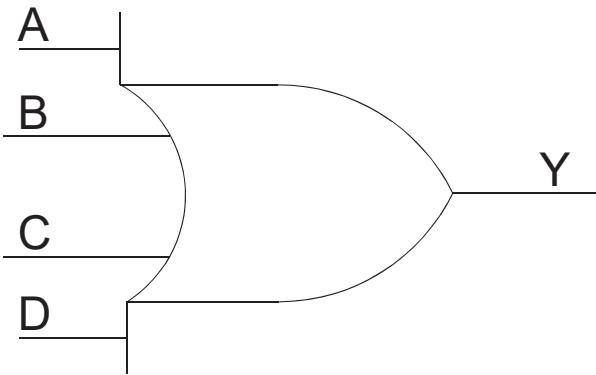


Table 1-47. OR4 I/O

| Input      | Output |
|------------|--------|
| A, B, C, D | Y      |

Table 1-48. OR4 TRUTH TABLE

| A | B | C | D | Y |
|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 |
| 1 | X | X | X | 1 |
| X | 1 | X | X | 1 |
| X | X | 1 | X | 1 |
| X | X | X | 1 | 1 |

1.21

XOR2

2-input XOR.

Figure 1-23. XOR2

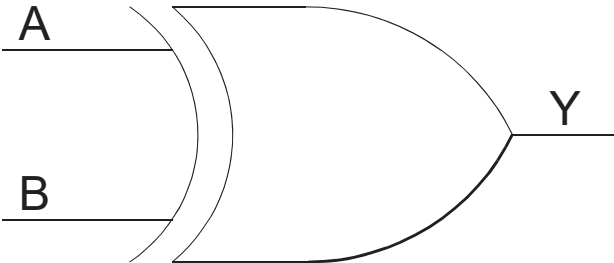


Table 1-49. XOR2 I/O

| Input | Output |
|-------|--------|
| A, B  | Y      |

Table 1-50. XOR2 TRUTH TABLE

| A | B | Y |
|---|---|---|
| 0 | 0 | 0 |
| 0 | 1 | 1 |
| 1 | 0 | 1 |
| 1 | 1 | 0 |

1.22

XOR3

3-input XOR.

Figure 1-24. XOR3

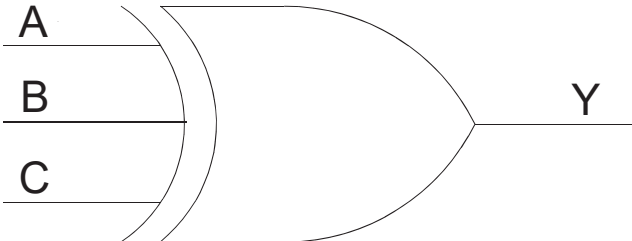


Table 1-51. XOR3 I/O

| Input   | Output |
|---------|--------|
| A, B, C | Y      |

Table 1-52. XOR3 TRUTH TABLE

| A | B | C | Y |
|---|---|---|---|
| 0 | 0 | 0 | 0 |
| 1 | 0 | 0 | 1 |
| 0 | 1 | 0 | 1 |
| 1 | 1 | 0 | 0 |
| 0 | 0 | 1 | 1 |
| 1 | 0 | 1 | 0 |
| 0 | 1 | 1 | 0 |
| 1 | 1 | 1 | 1 |

## 1.23 XOR4

4-input XOR.

Figure 1-25. XOR4

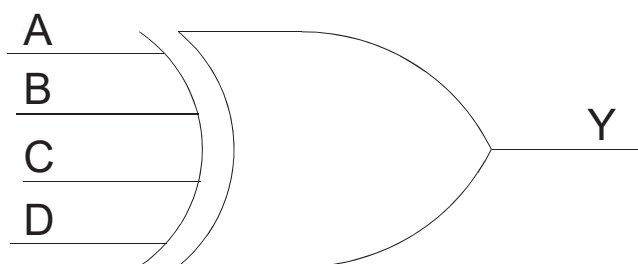


Table 1-53. XOR4 I/O

| Input      | Output |
|------------|--------|
| A, B, C, D | Y      |

Table 1-54. XOR4 TRUTH TABLE

| A | B | C | D | Y |
|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 0 | 1 |
| 0 | 0 | 1 | 1 | 0 |
| 0 | 1 | 0 | 0 | 1 |
| 0 | 1 | 0 | 1 | 0 |
| 0 | 1 | 1 | 0 | 0 |

.....continued


| A | B | C | D | Y |
|---|---|---|---|---|
| 0 | 1 | 1 | 1 | 1 |
| 1 | 0 | 0 | 0 | 1 |
| 1 | 0 | 0 | 1 | 0 |
| 1 | 0 | 1 | 0 | 0 |
| 1 | 0 | 1 | 1 | 1 |
| 1 | 1 | 0 | 0 | 0 |
| 1 | 1 | 0 | 1 | 1 |
| 1 | 1 | 1 | 0 | 1 |
| 1 | 1 | 1 | 1 | 0 |

## 1.24 XOR8

8-input XOR.

This macro uses two logic modules.

**Figure 1-26. XOR8**

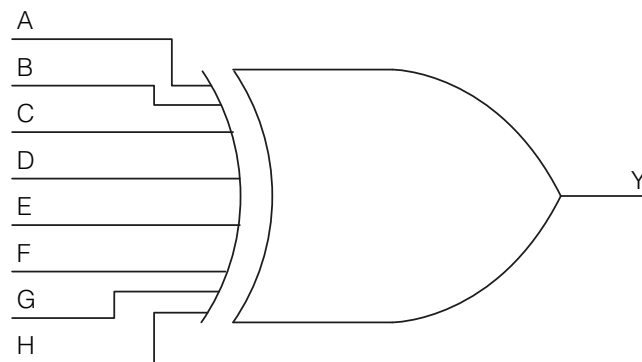

**Table 1-55. XOR8 I/O**

| Input                  | Output |
|------------------------|--------|
| A, B, C, D, E, F, G, H | Y      |

If you have an odd number of inputs that are High, the output is High (1).

If you have an even number of inputs that are High, the output is Low (0).

For example:

**Table 1-56. XOR8 TRUTH TABLE**

| A | B | C | D | E | F | G | H | Y |
|---|---|---|---|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 |

## 2. Sequential Logic

### 2.1 DFN1

D-Type Flip-Flop.

Figure 2-1. DFN1

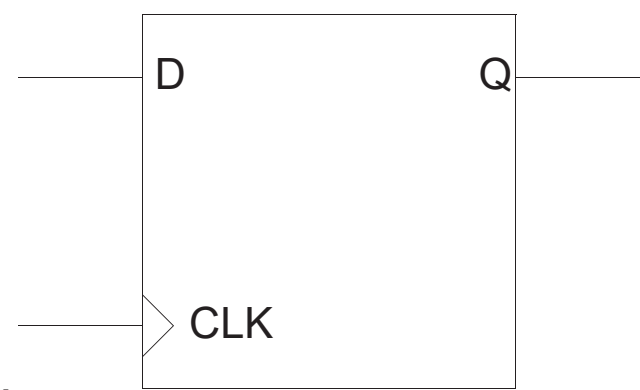


Table 2-1. DFN1 I/O

| Input  | Output |
|--------|--------|
| D, CLK | Q      |

Table 2-2. DFN1 TRUTH TABLE

| CLK        | D | Q <sub>n+1</sub> |
|------------|---|------------------|
| not Rising | X | Q <sub>n</sub>   |
|            | D | D                |

### 2.2 DFN1C0

D-Type Flip-Flop with active low Clear.

Figure 2-2. DFN1C0

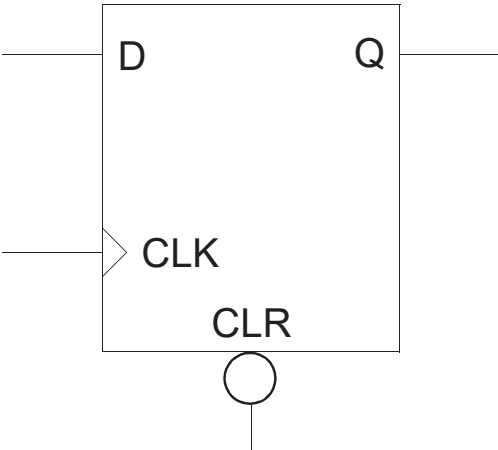


Table 2-3. DFN1C0 I/O

| Input       | Output |
|-------------|--------|
| D, CLK, CLR | Q      |

Table 2-4. DFN1C0 TRUTH TABLE

| CLR | CLK        | D | Q <sub>n+1</sub> |
|-----|------------|---|------------------|
| 0   | X          | X | 0                |
| 1   | not Rising | X | Q <sub>n</sub>   |
| 1   |            | D | D                |

2.3 DFN1E1

D-Type Flip-Flop with active high Enable.

Figure 2-3. DFN1E1

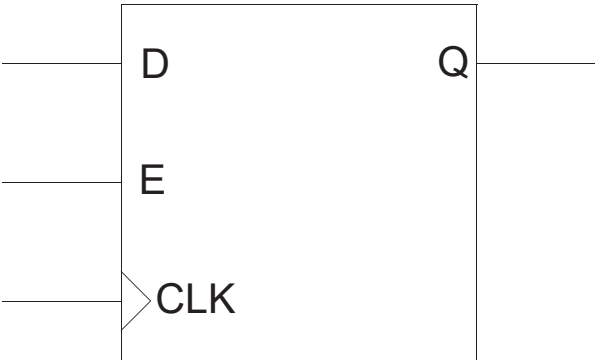


Table 2-5. DFN1E1 I/O

| Input     | Output |
|-----------|--------|
| D, E, CLK | Q      |

Table 2-6. DFN1E1 TRUTH TABLE

| E | CLK        | D | $Q_{n+1}$ |
|---|------------|---|-----------|
| 0 | X          | X | $Q_n$     |
| 1 | not Rising | X | $Q_n$     |
| 1 |            | D | D         |

## 2.4 DFN1E1C0

D-Type Flip-Flop, with active high Enable and active low Clear.

Figure 2-4. DFN1E1C0

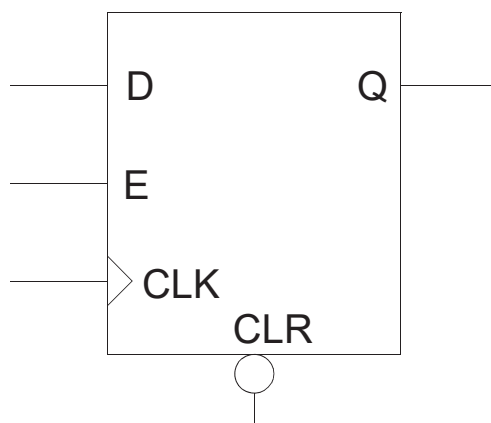


Table 2-7. DFN1E1C0 I/O

| Input          | Output |
|----------------|--------|
| CLR, D, E, CLK | Q      |

Table 2-8. DFN1E1C0 TRUTH TABLE

| CLR | E | CLK        | D | $Q_{n+1}$ |
|-----|---|------------|---|-----------|
| 0   | X | X          | X | 0         |
| 1   | 0 | X          | X | $Q_n$     |
| 1   | 1 | not Rising | X | $Q_n$     |
| 1   | 1 |            | D | D         |

## 2.5 DFN1E1P0

D-Type Flip-Flop with active high Enable and active low Preset.

Figure 2-5. DFN1E1P0

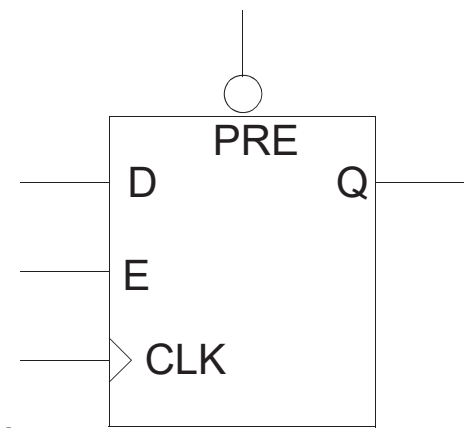


Table 2-9. DFN1E1P0 I/O

| Input          | Output |
|----------------|--------|
| D, E, PRE, CLK | Q      |

Table 2-10. DFN1E1P0 TRUTH TABLE

| PRE | E | CLK        | D | Q <sub>n+1</sub> |
|-----|---|------------|---|------------------|
| 0   | X | X          | X | 1                |
| 1   | 0 | X          | X | Q <sub>n</sub>   |
| 1   | 1 | not Rising | X | Q <sub>n</sub>   |
| 1   | 1 |            | D | D                |

2.6

DLN1

Data Latch.

Figure 2-6. DLN1

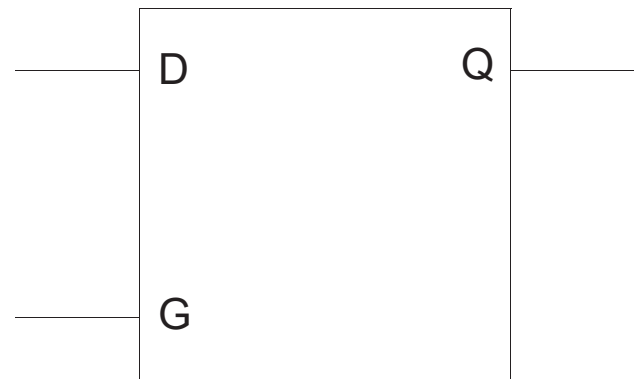


Table 2-11. DLN1 I/O

| Input | Output |
|-------|--------|
| D, G  | Q      |

Table 2-12. DLN1 TRUTH TABLE

| G | D | Q |
|---|---|---|
| 0 | X | Q |
| 1 | D | D |

2.7 DLN1C0

Data Latch with active low Clear.

Figure 2-7. DLN1C0

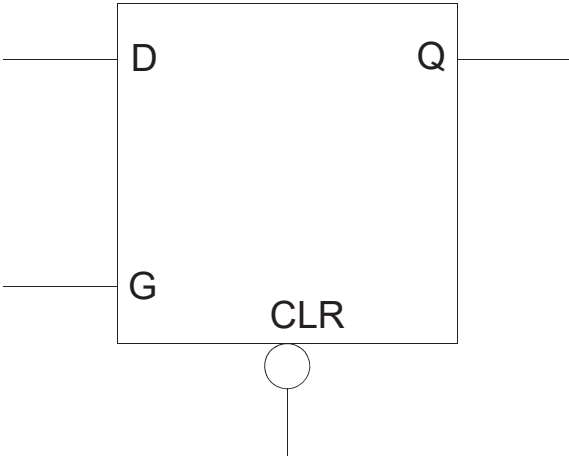


Table 2-13. I/O

| Input     | Output |
|-----------|--------|
| CLR, D, G | Q      |

Table 2-14. TRUTH TABLE

| CLR | G | D | Q |
|-----|---|---|---|
| 0   | X | X | 0 |
| 1   | 0 | X | Q |
| 1   | 1 | D | D |

2.8 DLN1P0

Data Latch with active low Preset.

Figure 2-8. DLN1P0

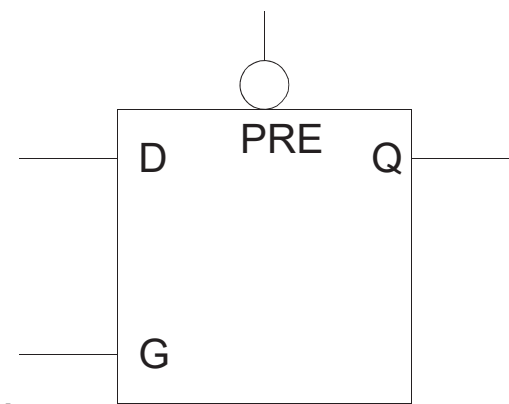


Table 2-15. DLN1C0 I/O

| Input     | Output |
|-----------|--------|
| D, G, PRE | Q      |

Table 2-16. DLN1C0 TRUTH TABLE


| PRE | G | D | Q |
|-----|---|---|---|
| 0   | X | X | 1 |
| 1   | 0 | X | Q |
| 1   | 1 | D | D |

2.9

SLE

Sequential Logic Element.

Figure 2-9. SLE

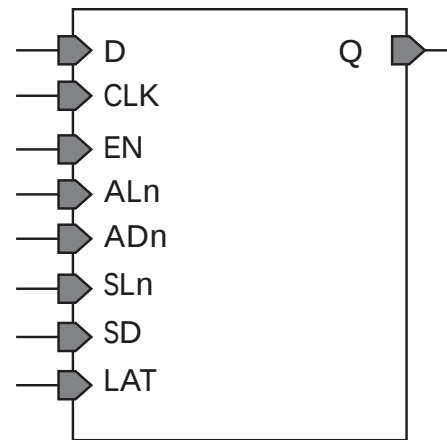

**Table 2-17. SLE I/O**

| Input |                                                                                                                                                     | Output |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Name  | Function                                                                                                                                            | Q      |
| D     | Data input                                                                                                                                          |        |
| CLK   | Clock input                                                                                                                                         |        |
| EN    | Active High CLK enable                                                                                                                              |        |
| ALn   | Asynchronous Load. This active low signal either sets the register or clears the register depending on the value of ADn.                            |        |
| ADn*  | Static asynchronous load data. When ALn is active, Q goes to the complement of ADn.                                                                 |        |
| SLn   | Synchronous load. This active low signal either sets the register or clears the register depending on the value of SD, at the rising edge of clock. |        |
| SD*   | Static synchronous load data. When SLn is active (i.e.low), Q goes to the value of SD at the rising edge of CLK.                                    |        |
| LAT*  | LAT*: Active High Latch Enable. This signal enables latch mode when high and register mode when low.                                                |        |

ADn, SD, and LAT are static signals defined at design time and need to be tied to 0 or 1.

**Table 2-18. SLE TRUTH TABLE**

| ALn | ADn | LAT | CLK        | EN | SLn | SD | D | Q <sub>n+1</sub> |
|-----|-----|-----|------------|----|-----|----|---|------------------|
| 0   | ADn | X   | X          | X  | X   | X  | X | !ADn             |
| 1   | X   | 0   | Not rising | X  | X   | X  | X | Qn               |
| 1   | X   | 0   |            | 0  | X   | X  | X | Qn               |
| 1   | X   | 0   |            | 1  | 0   | SD | X | SD               |
| 1   | X   | 0   |            | 1  | 1   | X  | D | D                |
| 1   | X   | 1   | 0          | X  | X   | X  | X | Qn               |
| 1   | X   | 1   | 1          | 0  | X   | X  | X | Qn               |
| 1   | X   | 1   | 1          | 1  | 0   | SD | X | SD               |
| 1   | X   | 1   | 1          | 1  | 1   | X  | D | D                |

### 3. I/O

#### 3.1 BIBUF

Bidirectional Buffer.

Figure 3-1. BIBUF

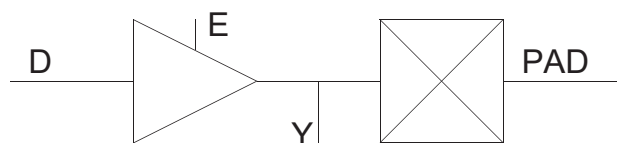


Table 3-1. BIBUF I/O

| Input     | Output |
|-----------|--------|
| D, E, PAD | PAD, Y |

Table 3-2. BIBUF TRUTH TABLE

| MODE   | E | D | PAD | Y   |
|--------|---|---|-----|-----|
| OUTPUT | 1 | D | D   | D   |
| INPUT  | 0 | X | Z   | X   |
| INPUT  | 0 | X | PAD | PAD |

#### 3.2 BIBUF\_DIFF

Bidirectional Buffer, Differential I/O.

Figure 3-2. BIBUF\_DIFF

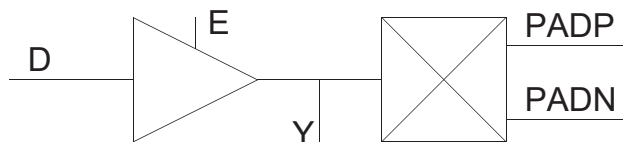


Table 3-3. BIBUF\_DIFF I/O

| Input            | Output        |
|------------------|---------------|
| D, E, PADP, PADN | PADP, PADN, Y |

Table 3-4. BIBUF\_DIFF TRUTH TABLE

| MODE   | E | D | PADP | PADN | Y |
|--------|---|---|------|------|---|
| OUTPUT | 1 | 0 | 0    | 1    | 0 |
| OUTPUT | 1 | 1 | 1    | 0    | 1 |
| INPUT  | 0 | X | Z    | Z    | X |
| INPUT  | 0 | X | 0    | 0    | X |
| INPUT  | 0 | X | 1    | 1    | X |

| .....continued |   |   |      |      |   |
|----------------|---|---|------|------|---|
| MODE           | E | D | PADP | PADN | Y |
| INPUT          | 0 | X | 0    | 1    | 0 |
| INPUT          | 0 | X | 1    | 0    | 1 |

### 3.3 CLKBIBUF

Bidirectional Buffer with Input to the global network.

Figure 3-3. CLKBIBUF

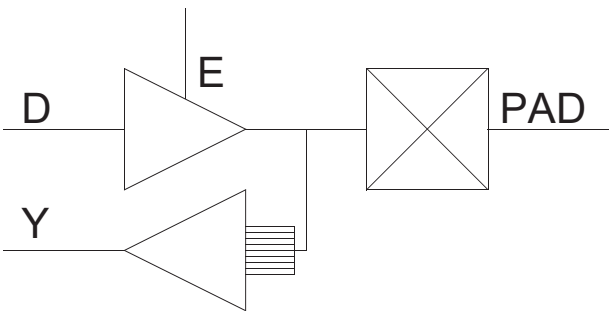


Table 3-5. CLKBIBUF I/O

| Input     | Output |
|-----------|--------|
| D, E, PAD | PAD, Y |

Table 3-6. CLKBIBUF TRUTH TABLE

| D | E | PAD | Y |
|---|---|-----|---|
| X | 0 | Z   | X |
| X | 0 | 0   | 0 |
| X | 0 | 1   | 1 |
| 0 | 1 | 0   | 0 |
| 1 | 1 | 1   | 1 |

### 3.4 CLKBUF

Input Buffer to the global network.

Figure 3-4. CLKBUF

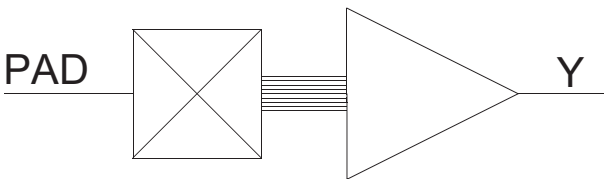


Table 3-7. CLKBUF I/O

| Input | Output |
|-------|--------|
| PAD   | Y      |

Table 3-8. CLKBUF TRUTH TABLE

| PAD | Y |
|-----|---|
| 0   | 0 |
| 1   | 1 |

3.5 CLKBUF\_DIFF

Differential I/O macro to the global network, Differential I/O.

Figure 3-5. CLKBUF\_DIFF

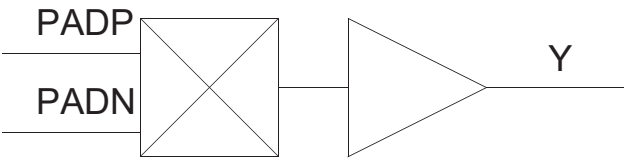


Table 3-9. INBUF\_DIFF I/O

| Input      | Output |
|------------|--------|
| PADP, PADN | Y      |

Table 3-10. INBUF\_DIFF TRUTH TABLE

| PADP | PADN | Y |
|------|------|---|
| Z    | Z    | Y |
| 0    | 0    | X |
| 1    | 1    | X |
| 0    | 1    | 0 |
| 1    | 0    | 1 |

3.6 GCLKBUF

Gated input I/O macro to the global network; the Enable signal can be used to turn off the global network to save power.

Figure 3-6. GCLKBUF

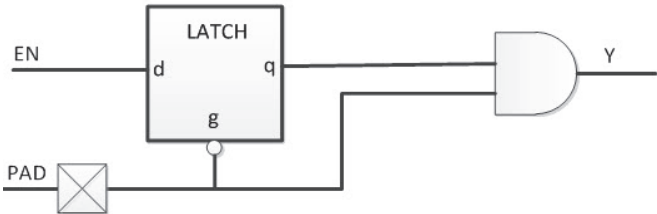


Table 3-11. GCLKBUF I/O

| Input   | Output |
|---------|--------|
| PAD, EN | Y      |


Table 3-12. GCLKBUF TRUTH TABLE

| PAD | EN | q | Y |
|-----|----|---|---|
| 0   | 0  | 0 | 0 |
| 0   | 1  | 1 | 0 |
| 1   | X  | q | q |
| Z   | X  | X | X |

### 3.7 GCLKBUF\_DIFF

Gated differential I/O macro to global network; the Enable signal can be used to turn off the global network.

Figure 3-7. GCLKBUF\_DIFF

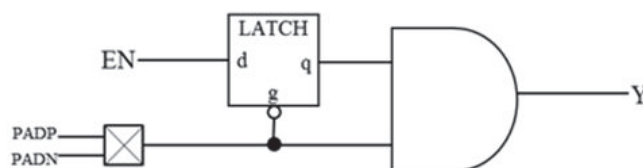

Differential

Table 3-13. GCLKBUF\_DIFF I/O

| Input          | Output |
|----------------|--------|
| PADP, PADN, EN | Y      |

Table 3-14. GCLKBUF\_DIFF TRUTH TABLE

| PADP | PADN | EN | q | Y |
|------|------|----|---|---|
| 0    | 1    | 0  | 0 | 0 |
| 0    | 1    | 1  | 1 | 0 |
| 1    | 0    | X  | q | q |
| 0    | 0    | X  | X | X |
| 1    | 1    | X  | X | X |
| Z    | Z    | X  | X | X |

### 3.8 INBUF

Input Buffer.

Figure 3-8. INBUF

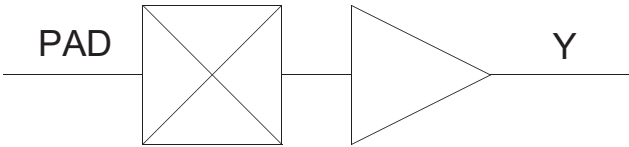


Table 3-15. INBUF I/O

| Input | Output |
|-------|--------|
| PAD   | Y      |

Table 3-16. INBUF TRUTH TABLE

| PAD | Y |
|-----|---|
| Z   | X |
| 0   | 0 |
| 1   | 1 |

3.9 INBUF\_DIFF

Input Buffer, Differential I/O.

Figure 3-9. INBUF\_DIFF

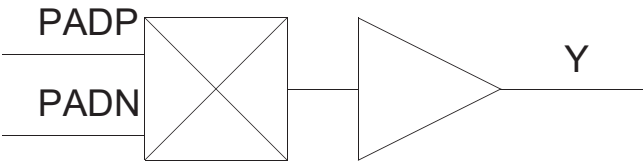


Table 3-17. INBUF\_DIFF I/O

| Input      | Output |
|------------|--------|
| PADP, PADN | Y      |

Table 3-18. INBUF\_DIFF TRUTH TABLE

| PADP | PADN | Y |
|------|------|---|
| Z    | Z    | X |
| 0    | 0    | X |
| 1    | 1    | X |
| 0    | 1    | 0 |
| 1    | 0    | 1 |

3.10 OUTBUF

Output buffer.

Figure 3-10. OUTBUF

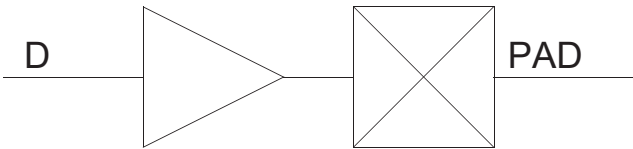


Table 3-19. OUTBUF I/O

| Input | Output |
|-------|--------|
| D     | PAD    |

Table 3-20. OUTBUF TRUTH TABLE

| D | PAD |
|---|-----|
| 0 | 0   |
| 1 | 1   |

3.11 OUTBUF\_DIFF

Output buffer, Differential I/O.

Figure 3-11. OUTBUF\_DIFF

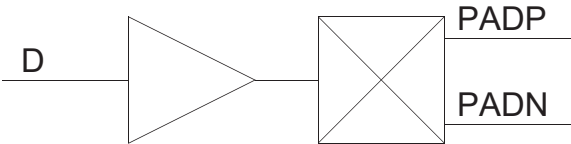


Table 3-21. OUTBUF\_DIFF I/O

| Input | Output     |
|-------|------------|
| D     | PADP, PADN |

Table 3-22. OUTBUF\_DIFF TRUTH TABLE

| D | PADP | PADN |
|---|------|------|
| 0 | 0    | 1    |
| 1 | 1    | 0    |

3.12 TRIBUFF

Tristate output buffer.

Figure 3-12. TRIBUFF

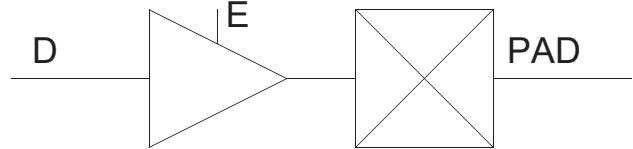


Table 3-23. TRIBUFF I/O

| Input | Output |
|-------|--------|
| D, E  | PAD    |

Table 3-24. TRIBUFF TRUTH TABLE

| D | E | PAD |
|---|---|-----|
| X | 0 | Z   |
| D | 1 | D   |

3.13 TRIBUFF\_DIFF

Tristate output buffer, Differential I/O.

Figure 3-13. TRIBUFF\_DIFF

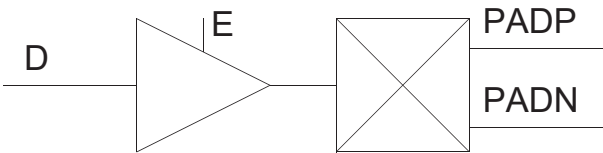


Table 3-25. TRIBUFF\_DIFF I/O

| Input | Output     |
|-------|------------|
| D, E  | PADP, PADN |

Table 3-26. TRUTH TABLE

| D | E | PADP | PADN |
|---|---|------|------|
| X | 0 | Z    | Z    |
| 0 | 1 | 0    | 1    |
| 1 | 1 | 1    | 0    |

3.14 UJTAG

The UJTAG macro is a special purpose macro. It allows access to the user JTAG circuitry on board the chip.

You must instantiate a UJTAG macro in your design if you plan to make use of the user JTAG feature. The TMS, TDI, TCK, TRSTB and TDO pins of the macro must be connected to top level ports of the design.

Figure 3-14. UJTAG




Table 3-27. PORTS AND DESCRIPTIONS

| Port       | Direction | Polarity | Description                                                                                                                                                                                                                                                                                                                                                             |
|------------|-----------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UIREG[7:0] | Output    | —        | This 8-bit bus carries the contents of the JTAG instruction register of each device. Instruction values 16 to 127 are not reserved and can be employed as user-defined instructions.                                                                                                                                                                                    |
| URSTB      | Output    | Low      | URSTB is an Active Low signal and is asserted when the TAP controller is in Test-Logic-Reset mode. URSTB is asserted at power-up, and a power-on reset signal resets the TAP controller state.                                                                                                                                                                          |
| UTDI       | Output    | —        | This port is directly connected to the TAP's TDI signal.                                                                                                                                                                                                                                                                                                                |
| UTDO       | Input     | —        | This port is the user TDO output. Inputs to the UTDO port are sent to the TAP TDO output MUX when the IR address is in user range.                                                                                                                                                                                                                                      |
| UDRSH      | Output    | High     | Active High signal enabled in the Shift_DR TAP state.                                                                                                                                                                                                                                                                                                                   |
| UDRCAP     | Output    | High     | Active High signal enabled in the Capture_DR_TAP state.                                                                                                                                                                                                                                                                                                                 |
| UDRCK      | Output    | —        | This port is directly connected to the TAP's TCK signal.<br>Note: UDRCK must be connected to a global macro such as CLKINT. If this is not done, Synthesis/Compile will add it to the netlist to legalize it.                                                                                                                                                           |
| UDRUPD     | Output    | High     | Active High signal enabled in the Update_DR_TAP state.                                                                                                                                                                                                                                                                                                                  |
| TCK        | Input     | —        | Test Clock. Serial input for JTAG boundary scan, ISP, and UJTAG. The TCK pin does not have an internal pull-up/pull-down resistor. Connect TCK to GND or +3.3 V through a resistor (500-1 K?) placed closed to the FPGA pin to prevent totem-pole current on the input buffer and TMS from entering into an undesired state.<br>If JTAG is not used, connect it to GND. |
| TDI        | Input     | —        | Test Data In. Serial input for JTAG boundary scan. There is an internal weak pull-up resistor on the TDI pin.                                                                                                                                                                                                                                                           |
| TDO        | Output    | —        | Test Data Out. Serial output for JTAG boundary scan. The TDO pin does not have an internal pull-up/pull-down resistor.                                                                                                                                                                                                                                                  |
| TMS        | Input     | —        | Test mode select. The TMS pin controls the use of the IEEE1532 boundary scan pins (TCK, TDI, TDO, and TRST). There is an internal weak pull-up resistor on the TMS pin.                                                                                                                                                                                                 |


| .....continued |           |          |                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------|-----------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port           | Direction | Polarity | Description                                                                                                                                                                                                                                                                                                                                                                              |
| TRSTB          | Input     | Low      | Test reset. The TRSTB pin is an active low input. It synchronously initializes (or resets) the boundary scan circuitry. There is an internal weak pull-up resistor on the TRSTB pin.<br>To hold the JTAG in reset mode and prevent it from entering into undesired states in critical applications, connect TRSTB to GND through a 1 K $\Omega$ resistor (placed close to the FPGA pin). |

### 3.15 UJTAG\_SEC

The UJTAG\_SEC macro is a special purpose macro. It allows access to the user JTAG circuitry on board the chip.

You must instantiate a UJTAG\_SEC macro in your design if you plan to make use of the user JTAG feature. The TMS, TDI, TCK, TRSTB, and TDO pins of the macro must be connected to top level ports of the design.

**Figure 3-15. UJTAG\_SEC**

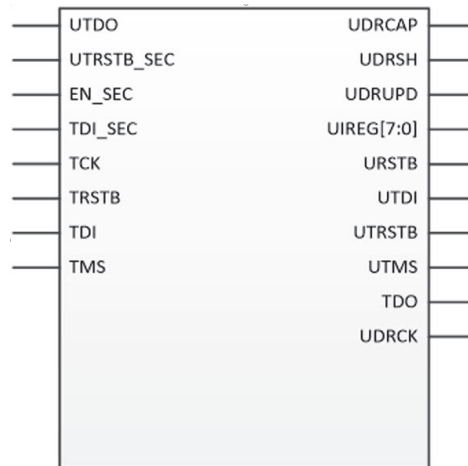

**Table 3-28. PORTS AND DESCRIPTIONS**

| Port       | Direction | Polarity | Description                                                                                                                                                                                    |
|------------|-----------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UIREG[7:0] | Output    | —        | This 8-bit bus carries the contents of the JTAG instruction register of each device. Instruction values 16 to 127 are not reserved and can be employed as user-defined instructions.           |
| URSTB      | Output    | Low      | URSTB is an Active Low signal and is asserted when the TAP controller is in Test-Logic-Reset mode. URSTB is asserted at power-up, and a power-on reset signal resets the TAP controller state. |
| UTDI       | Output    | —        | This port is directly connected to the TAP's TDI signal.                                                                                                                                       |
| UTDO       | Input     | —        | This port is the user TDO output. Inputs to the UTDO port are sent to the TAP TDO output MUX when the IR address is in user range.                                                             |

.....continued

| Port      | Direction | Polarity | Description                                                                                                                                                                                                                                                                                                                                                                      |
|-----------|-----------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UDRSH     | Output    | High     | Active High signal enabled in the Shift_DR TAP state.                                                                                                                                                                                                                                                                                                                            |
| UDRCAP    | Output    | High     | Active High signal enabled in the Capture_DR_TAP state.                                                                                                                                                                                                                                                                                                                          |
| UDRCK     | Output    | —        | This port is directly connected to the TAP's TCK signal.<br>Note: UDRCK must be connected to a global macro such as CLKINT. If this is not done, Synthesis/Compile will add it to the netlist to legalize it.                                                                                                                                                                    |
| UDRUPD    | Output    | High     | Active High signal enabled in the Update_DR_TAP state.                                                                                                                                                                                                                                                                                                                           |
| TCK       | Input     | —        | Test Clock. Serial input for JTAG boundary scan, ISP, and UJTAG. The TCK pin does not have an internal pull-up/pull-down resistor. Connect TCK to GND or +3.3 V through a resistor (500-1 K?) placed closed to the FPGA pin to prevent totem-pole current on the input buffer and TMS from entering into an undesired state.<br>If JTAG is not used, connect it to GND.          |
| TDI       | Input     | —        | Test Data In. Serial input for JTAG boundary scan. There is an internal weak pull-up resistor on the TDI pin.                                                                                                                                                                                                                                                                    |
| TDO       | Output    | —        | Test Data Out. Serial output for JTAG boundary scan. The TDO pin does not have an internal pull-up/pull-down resistor.                                                                                                                                                                                                                                                           |
| TMS       | Input     | —        | Test mode select. The TMS pin controls the use of the IEEE1532 boundary scan pins (TCK, TDI, TDO, and TRST). There is an internal weak pull-up resistor on the TMS pin.                                                                                                                                                                                                          |
| TRSTB     | Input     | Low      | Test reset. The TRSTB pin is an active low input. It synchronously initializes (or resets) the boundary scan circuitry. There is an internal weak pull-up resistor on the TRSTB pin.<br>To hold the JTAG in reset mode and prevent it from entering into undesired states in critical applications, connect TRSTB to GND through a 1 K? resistor (placed close to the FPGA pin). |
| EN_SEC    | Input     | High     | Enable Security. Enables the user design to override the external TDI and TRSTB input to the TAP.<br>Need to tie LOW in the design when not used.                                                                                                                                                                                                                                |
| TDI_SEC   | Input     | —        | TDI Security override. Overrides the external TDI input to the TAP when SEC_EN is HIGH.                                                                                                                                                                                                                                                                                          |
| TRSTB_SEC | Input     | Low      | TRSTB Security override. Overrides the external TRSTB input to the TAP when SEC_EN is HIGH.                                                                                                                                                                                                                                                                                      |

## 4. Clocking

### 4.1 CLKBIBUF

Bidirectional Buffer with Input to the global network.

Figure 4-1. CLKBIBUF

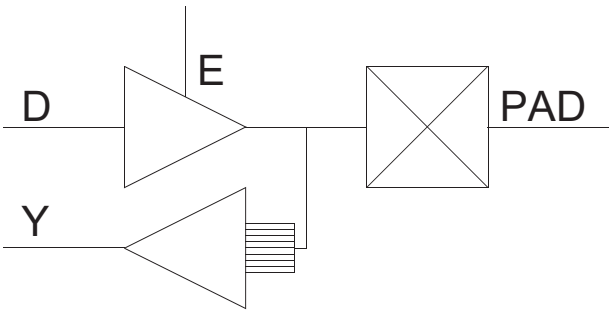


Table 4-1. CLKBIBUF I/O

| Input     | Output |
|-----------|--------|
| D, E, PAD | PAD, Y |

Table 4-2. CLKBIBUF TRUTH TABLE

| D | E | PAD | Y |
|---|---|-----|---|
| X | 0 | Z   | X |
| X | 0 | 0   | 0 |
| X | 0 | 1   | 1 |
| 0 | 1 | 0   | 0 |
| 1 | 1 | 1   | 1 |

### 4.2 CLKBUF

Input Buffer to the global network.

Figure 4-2. CLKBUF

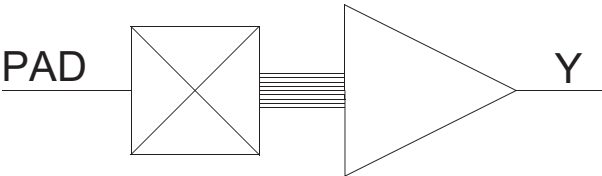


Table 4-3. CLKBUF I/O

| Input | Output |
|-------|--------|
| PAD   | Y      |

Table 4-4. CLKBUF TRUTH TABLE

| PAD | Y |
|-----|---|
| 0   | 0 |
| 1   | 1 |

### 4.3 CLKBUF\_DIFF

Differential I/O macro to the global network, Differential I/O.

Figure 4-3. CLKBUF\_DIFF

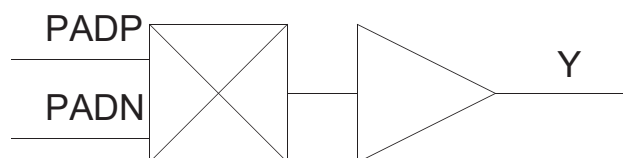


Table 4-5. INBUF\_DIFF I/O

| Input      | Output |
|------------|--------|
| PADP, PADN | Y      |

Table 4-6. INBUF\_DIFF TRUTH TABLE

| PADP | PADN | Y |
|------|------|---|
| Z    | Z    | Y |
| 0    | 0    | X |
| 1    | 1    | X |
| 0    | 1    | 0 |
| 1    | 0    | 1 |

### 4.4 CLKINT

Macro used to route an internal fabric signal to the global network.

Figure 4-4. CLKINT

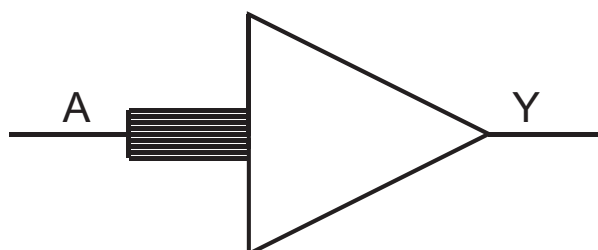


Table 4-7. CLKINT I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 4-8. CLKINT TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

4.5 CLKINT\_PRESERVE

Macro used to route an internal fabric signal to the global network. It has the same functionality as CLKINT except that this clock always stays on the global clock network and will not be demoted during design implementation.

Figure 4-5. CLKINT\_PRESERVE

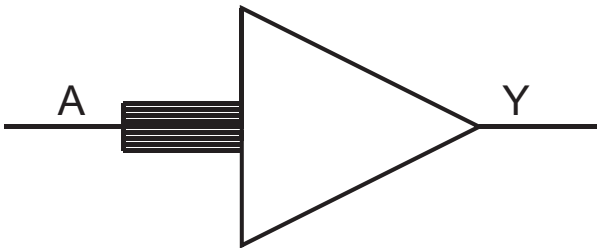


Table 4-9. CLKINT\_PRESERVE I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 4-10. CLKINT\_PRESERVE TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

4.6 GCLKBUF

Gated input I/O macro to the global network; the Enable signal can be used to turn off the global network to save power.

Figure 4-6. GCLKBUF

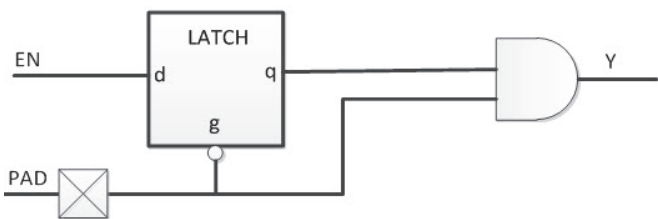


Table 4-11. GCLKBUF I/O

| Input   | Output |
|---------|--------|
| PAD, EN | Y      |


Table 4-12. GCLKBUF TRUTH TABLE

| PAD | EN | q | Y |
|-----|----|---|---|
| 0   | 0  | 0 | 0 |
| 0   | 1  | 1 | 0 |
| 1   | X  | q | q |
| Z   | X  | X | X |

## 4.7 GCLKBUF\_DIFF

Gated differential I/O macro to global network; the Enable signal can be used to turn off the global network.

Figure 4-7. GCLKBUF\_DIFF

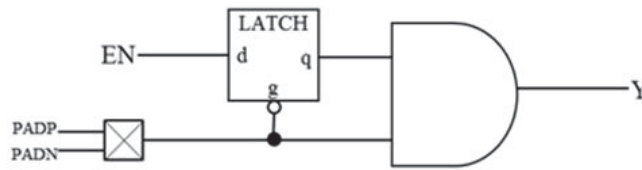

Differential

Table 4-13. GCLKBUF\_DIFF I/O

| Input          | Output |
|----------------|--------|
| PADP, PADN, EN | Y      |

Table 4-14. GCLKBUF\_DIFF TRUTH TABLE

| PADP | PADN | EN | q | Y |
|------|------|----|---|---|
| 0    | 1    | 0  | 0 | 0 |
| 0    | 1    | 1  | 1 | 0 |
| 1    | 0    | X  | q | q |
| 0    | 0    | X  | X | X |
| 1    | 1    | X  | X | X |
| Z    | Z    | X  | X | X |

## 4.8 GCLKINT

Gated macro used to route an internal fabric signal to the global network. The Enable signal can be used to turn off the global network to save power.

Figure 4-8. GCLKINT

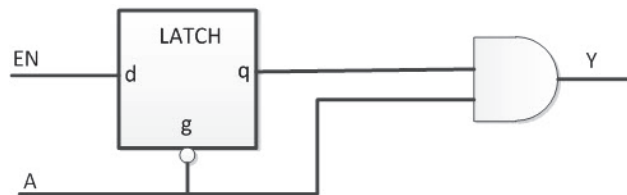


Table 4-15. GCLKINT I/O

| Input | Output |
|-------|--------|
| A, EN | Y      |

Table 4-16. GCLKINT TRUTH TABLE

| A | EN | q (Internal Signal) | Y |
|---|----|---------------------|---|
| 0 | 0  | 0                   | 0 |
| 0 | 1  | 1                   | 0 |
| 1 | X  | q                   | q |

4.9 RCLKINT

Macro used to route an internal fabric signal to a row global buffer, thus creating a local clock.

Figure 4-9. RCLKINT

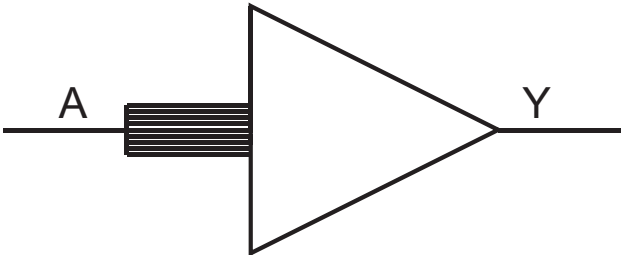


Table 4-17. RCLKINT I/O

| Input | Output |
|-------|--------|
| A     | Y      |


Table 4-18. RCLKINT TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

4.10 RGCLKINT

Gated macro used to route an internal fabric signal to a row global buffer, thus creating a local clock. The Enable signal can be used to turn off the local clock to save power.

Figure 4-10. RGCLKINT

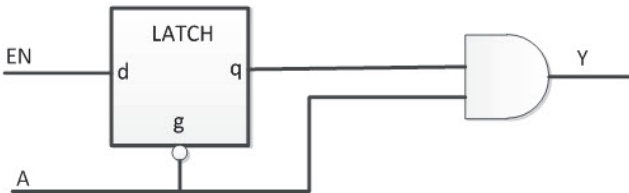

**Table 4-19. RGCLKINT I/O**

| Input | Output |
|-------|--------|
| A, EN | Y      |

**Table 4-20. RGCLKINT TRUTH TABLE**

| A | EN | q (Internal Signal) | Y |
|---|----|---------------------|---|
| 0 | 0  | 0                   | 0 |
| 0 | 1  | 1                   | 0 |
| 1 | X  | q                   | q |

## 5. Special

### 5.1 FCEND\_BUFF

Buffer, driven by the FCO pin of the last macro in the Carry-Chain.

Figure 5-1. FCEND\_BUFF

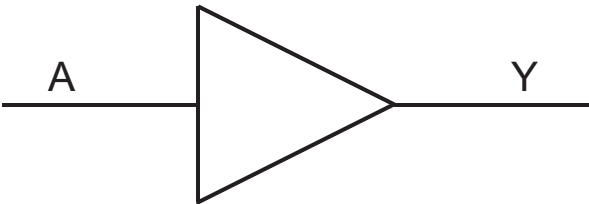


Table 5-1. FCEND\_BUFF I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 5-2. FCEND\_BUFF TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

### 5.2 FCINIT\_BUFF

Buffer, used to initialize the FCI pin of the first macro in the Carry-Chain.

Figure 5-2. FCINIT\_BUFF

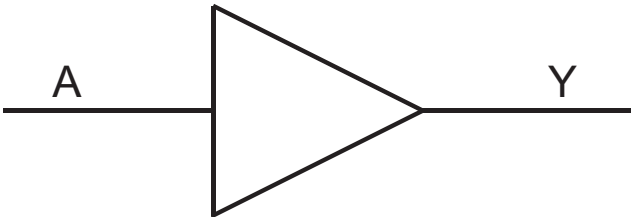


Table 5-3. FCINIT\_BUFF I/O

| Input | Output |
|-------|--------|
| A     | Y      |

Table 5-4. FCINIT\_BUFF TRUTH TABLE

| A | Y |
|---|---|
| 0 | 0 |
| 1 | 1 |

### 5.3 PF\_SPI

The PF\_SPI macro allows your design access to the dedicated System Controller SPI port, when SPI-Master mode is enabled, by tying both SC\_SPI\_EN and IO\_CFG\_INTF to high.

Figure 5-3. PF\_SPI

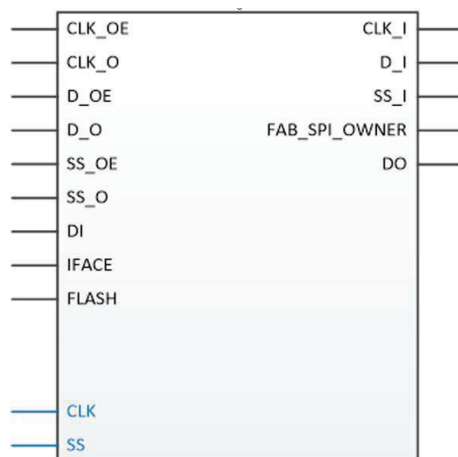


Table 5-5. PORTS AND DESCRIPTIONS

| Port          | Direction | Polarity | Description                                                                                                                                                |
|---------------|-----------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D_I           | Output    | —        | This port is connected to the SPI DI pin.                                                                                                                  |
| FAB_SPI_OWNER | Output    | High     | Indicator to the Fabric SPI-Master if the SPI Port is available.                                                                                           |
| CLK_OE        | Input     | High     | Enables the SPI CLK output.                                                                                                                                |
| CLK_O         | Input     | —        | This port drives the SPI Clock pin. CLK_OE must be HIGH to drive.                                                                                          |
| D_OE          | Input     | High     | Enables the Data output.                                                                                                                                   |
| D_O           | Input     | —        | This port drives the SPI DO pin. D_OE must be HIGH to drive.                                                                                               |
| SS_OE         | Input     | High     | Enables the Slave Select output.                                                                                                                           |
| SS_O          | Input     | High     | This port drives the SPI Slave Select (SS) pin. SS_OE must be HIGH to drive.                                                                               |
| CLK           | Output    | —        | SPI Clock output pin.                                                                                                                                      |
| DI            | Input     | —        | SPI Serial Data input pin.                                                                                                                                 |
| DO            | Output    | —        | SPI Serial Data output pin.                                                                                                                                |
| SS            | Output    | High     | SPI Slave Select output pin.                                                                                                                               |
| IFACE         | Input     | High     | This port is mapped to the IO_CFG_INTF pin. This pin must be tied to high together with the SC_SPI_EN pin to enable SPI port for the fabric macro to work. |
| FLASH         | Input     | High     | This port is mapped to the SC_SPI_EN pin. This pin must be tied to high together with the IO_CFG_INTF pin to enable the SPI port for fabric macro to work. |

## 5.4 SC\_STATUS

In the SC\_STATUS macro, SUSPEND\_EN signal is used to indicate that the device is in avionics mode. It means that device initialization is complete and all hardware forcing to default values is in place.

Figure 5-4. SC\_STATUS

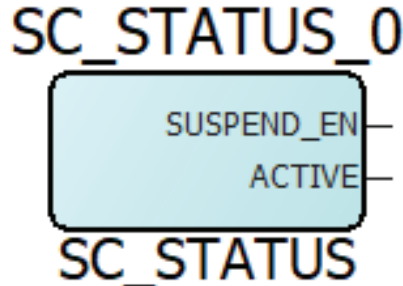


Table 5-6. SC\_STATUS I/O

| Value | Description                         |
|-------|-------------------------------------|
| 0     | The device is not in avionics mode. |
| 1     | The device is in avionics mode.     |

For ACTIVE signal, if SC is in suspend mode, ACTIVE signal should not be asserted.

Table 5-7. PORTS AND DESCRIPTIONS

| Port           | On Masterf   |       |               | On Slave |       |           | Description                          |
|----------------|--------------|-------|---------------|----------|-------|-----------|--------------------------------------|
|                | Presenc<br>e | Width | Directio<br>n | Presence | Width | Direction |                                      |
| SUSPEND_E<br>N | Require<br>d | 1     | Output        | Required | 1     | Input     | Asserted when SC is in suspend mode. |
| ACTIVE         | Require<br>d | 1     | Output        | Required | 1     | Input     | Asserted when SC is in active mode.  |

## 6. RAM1K20

The RAM1K20 block contains 20,480 (16,896 with ECC) memory bits and is a true dual-port memory. The RAM1K20 memory can also be configured in two-port mode. All read/write operations to the RAM1K20 memory are synchronous. To improve the read-data delay, an optional pipeline register at the output is available. In addition to the feed-through write mode option to enable immediate access to the write-data, RAM1K20 has a Read-before-write option in the dual-port mode. RAM1K20 also includes a Read-enable control for both dual-port and two-port modes. The RAM1K20 memory has two data ports, which can be independently configured in any of the following combination.

- Non-ECC Dual-Port RAM with the following configurations:
  - Any of 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1 on each port
- Non-ECC Two-Port RAM with the following configurations:
  - Any of 512x40, 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1 on each port
- ECC Two-Port RAM with the following configuration:
  - 512x33 on both ports

### 6.1 Functionality

The main features of the RAM1K20 memory block are as follows:

- A RAM1K20 block has 16,896 bits with ECC and 20,480 bits without ECC.
- A RAM1K20 block provides two independent data ports A and B.
- In non-ECC dual-port mode, each port can be independently configured to any of the following depth/width: 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1. There are 25 unique combinations of non-ECC dual-port aspect ratios:

|             |             |            |            |             |
|-------------|-------------|------------|------------|-------------|
| 1Kx20/1Kx20 | 1Kx20/2Kx10 | 1Kx20/4Kx5 | 1Kx16/8Kx2 | 1Kx16/16Kx1 |
| 2Kx10/1Kx20 | 2Kx10/2Kx10 | 2Kx10/4Kx5 | 2Kx8/8Kx2  | 2Kx8/16Kx1  |
| 4Kx5/1Kx20  | 4Kx5/2Kx10  | 4Kx5/4Kx5  | 4Kx4/8Kx2  | 4Kx4/16Kx1  |
| 8Kx2/1Kx16  | 8Kx2/2Kx8   | 8Kx2/4Kx4  | 8Kx2/8Kx2  | 8Kx2/16Kx1  |
| 16Kx1/1Kx16 | 16Kx1/2Kx8  | 16Kx1/4Kx4 | 16Kx1/8Kx2 | 16Kx1/16Kx1 |

- RAM1K20 also has a two-port mode. In this case, Port A will become the read port and Port B becomes the write port.
- In non-ECC two-port mode, each port can be independently configured to any of the following depth/width: 512x40, 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1. There are 36 unique combinations of non-ECC two-port aspect ratios:


|               |              |              |             |             |              |
|---------------|--------------|--------------|-------------|-------------|--------------|
| 512x40/512x40 | 512x40/1Kx20 | 512x40/2Kx10 | 512x40/4Kx5 | 512x32/8Kx2 | 512x32/16Kx1 |
| 1Kx20/512x40  | 1Kx20/1Kx20  | 1Kx20/2Kx10  | 1Kx20/4Kx5  | 1Kx16/8Kx2  | 1Kx16/16Kx1  |
| 2Kx10/512x40  | 2Kx10/1Kx20  | 2Kx10/2Kx10  | 2Kx10/4Kx5  | 2Kx8/8Kx2   | 2Kx8/16Kx1   |
| 4Kx5/512x40   | 4Kx5/1Kx20   | 4Kx5/2Kx10   | 4Kx5/4Kx5   | 4Kx4/8Kx2   | 4Kx4/16Kx1   |
| 8Kx2/512x32   | 8Kx2/1Kx16   | 8Kx2/2Kx8    | 8Kx2/4Kx4   | 8Kx2/8Kx2   | 8Kx2/16Kx1   |
| 16Kx1/512x32  | 16Kx1/1Kx16  | 16Kx1/2Kx8   | 16Kx1/4Kx4  | 16Kx1/8Kx2  | 16Kx1/16Kx1  |

- RAM1K20 has an ECC two-port mode, for which both ports have word widths equal to 33 bits. There is one unique combination of ECC two-port aspect ratio:
  - 512x33/512x33
- RAM1K20 performs synchronous operation for setting up the address as well as writing and reading the data.
- RAM1K20 has a Read-enable control for both dual-port and two-port modes.

- The address, data, block-port select, write-enable and read-enable inputs are registered.
- An optional pipeline register with a separate enable, synchronous-reset and asynchronous-reset is available at the read-data port to improve the clock-to-out delay.
- There is an independent clock for each port. The memory is triggered at the rising edge of the clock.
- The true dual-port mode supports an optional Read-before-write mode or a feed-through write mode, where the write-data also appears on the corresponding read-data port.
- Read from both ports at the same location is allowed.
- Read and write on the same location at the same time results in unknown data to be read. There is no collision prevention or detection. However, correct data is expected to be written into the memory.
- When ECC is enabled, each port of the RAM1K20 memory can raise flags to indicate single-bit-correct and double-bit-detect.

The following figure shows a simplified block diagram of the RAM1K20 memory block. The simplified block illustrates the two independent data ports, ECC, the read-data pipeline registers, read-before-write selection, and the feed-through multiplexers.

**Figure 6-1. Simplified Block Diagram of RAM1K20**

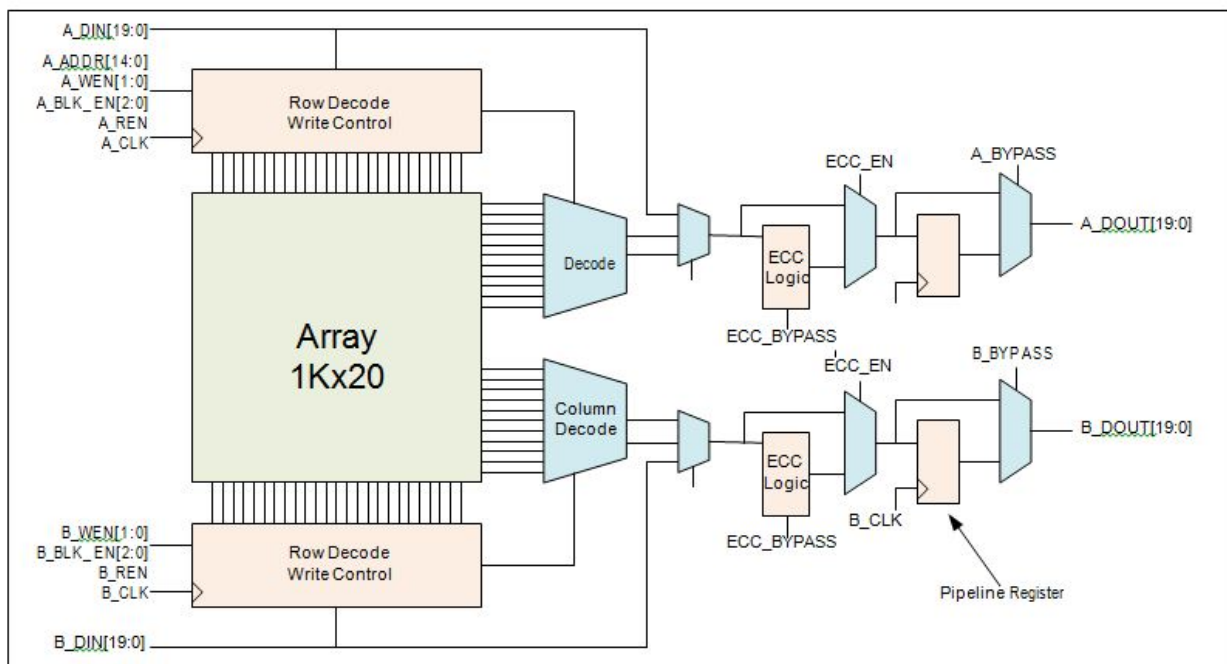

**Table 6-1. PORT LIST FOR RAM1K20**

| Pin Name      | Pin Direction | Type <sup>1</sup> | Description                     | Polarity |
|---------------|---------------|-------------------|---------------------------------|----------|
| A_ADDR[13:0]  | Input         | Dynamic           | Port A address                  |          |
| A_BLK_EN[2:0] | Input         | Dynamic           | Port A block selects            | High     |
| A_CLK         | Input         | Dynamic           | Port A clock                    | Rising   |
| A_DIN[19:0]   | Input         | Dynamic           | Port A write-data               | —        |
| A_DOUT[19:0]  | Output        | Dynamic           | Port A read-data                | —        |
| A_WEN[1:0]    | Input         | Dynamic           | Port A write-enables (per byte) | High     |
| A_REN         | Input         | Dynamic           | Port A read-enable              | High     |
| A_WIDTH[2:0]  | Input         | Static            | Port A width/depth mode select  | —        |

.....continued

| Pin Name      | Pin Direction | Type <sup>1</sup> | Description                                             | Polarity |
|---------------|---------------|-------------------|---------------------------------------------------------|----------|
| A_WMODE[1:0]  | Input         | Static            | Port A Read-before-write and Feed-through write selects | High     |
| A_BYPASS      | Input         | Static            | Port A pipeline register select                         | Low      |
| A_DOUT_EN     | Input         | Dynamic           | Port A pipeline register enable                         | High     |
| A_DOUT_SRST_N | Input         | Dynamic           | Port A pipeline register synchronous-reset              | Low      |
| A_DOUT_ARST_N | Input         | Dynamic           | Port A pipeline register asynchronous-reset             | Low      |
|               |               |                   |                                                         |          |
| B_ADDR[13:0]  | Input         | Dynamic           | Port B address                                          | —        |
| B_BLK_EN[2:0] | Input         | Dynamic           | Port B block selects                                    | High     |
| B_CLK         | Input         | Dynamic           | Port B clock                                            | Rising   |
| B_DIN[19:0]   | Input         | Dynamic           | Port B write-data                                       | —        |
| B_DOUT[19:0]  |               | Dynamic           | Port B read-data                                        | —        |
| B_WEN[1:0]    | Input         | Dynamic           | Port B write-enables (per byte)                         | High     |
| B_REN         | Input         | Dynamic           | Port B read-enable                                      | High     |
| B_WIDTH[2:0]  | Input         | Static            | Port B width/depth mode select                          | —        |
| B_WMODE[1:0]  | Input         | Static            | Port B Read-before-write and Feed-through write selects | High     |
| B_BYPASS      | Input         | Static            | Port B pipeline register select                         | Low      |
| B_DOUT_EN     | Input         | Dynamic           | Port B pipeline register enable                         | High     |
| B_DOUT_SRST_N | Input         | Dynamic           | Port B pipeline register synchronous-reset              | Low      |
| B_DOUT_ARST_N | Input         | Dynamic           | Port B pipeline register asynchronous-reset             | Low      |
|               |               |                   |                                                         |          |
| ECC_EN        | Input         | Static            | Enable ECC                                              | High     |
| ECC_BYPASS    | Input         | Static            | ECC pipeline register select                            | Low      |
| SB_CORRECT    | Output        | Dynamic           | Single-bit correct flag                                 | High     |
| DB_DETECT     | Output        | Dynamic           | Double-bit detect flag                                  | High     |
| BUSY_FB       | Input         | Static            | Lock access to FCB                                      | High     |
| ACCESS_BUSY   | Output        | Dynamic           | Busy signal from FCB                                    | High     |

Static inputs are defined at design time and need to be tied to 0 or 1.

#### A\_WIDTH and B\_WIDTH

The following table lists the width/depth mode selections for each port. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_WIDTH indicates the read width while B\_WIDTH indicates the write width.

**Table 6-2. WIDTH/DEPTH MODE SELECTION**

| Depth x Width                                                     | A_WIDTH/B_WIDTH |
|-------------------------------------------------------------------|-----------------|
| 16Kx1                                                             | 000             |
| 8Kx2                                                              | 001             |
| 4Kx4, 4Kx5                                                        | 010             |
| 2Kx8, 2Kx10                                                       | 011             |
| 1Kx16, 1Kx20                                                      | 100             |
| 512x32 (Two-port),<br>512x40 (Two-port),<br>512x33 (Two-port ECC) | 101             |

A\_WEN and B\_WEN

The following table lists the write/read control signals for each port. Two-port mode is in effect when the width of at least one port is greater than 20, and read operation is always enabled.

**Table 6-3. WRITE/READ OPERATION SELECT**

| Depth x Width               | A_WEN/B_WEN     | Result                               |
|-----------------------------|-----------------|--------------------------------------|
| 16Kx1, 8Kx2, 4Kx5,<br>2Kx10 | x0              | Perform a read operation             |
|                             | x1              | Perform a write operation            |
| 1Kx16                       | 00              | Perform a read operation             |
|                             | 01              | Write [8:5], [3:0]                   |
|                             | 10              | Write [18:15], [13:10]               |
|                             | 11              | Write [18:15], [13:10], [8:5], [3:0] |
| 1Kx20                       | 00              | Perform a read operation             |
|                             | 01              | Write [9:0]                          |
|                             | 10              | Write [19:10]                        |
|                             | 11              | Write [19:0]                         |
| 512x32 (Two-port write)     | B_WEN[0] = 1    | Write B_DIN[8:5], B_DIN[3:0]         |
|                             | B_WEN[1] = 1    | Write B_DIN[18:15], B_DIN[13:10]     |
|                             | A_WEN[0] = 1    | Write A_DIN[8:5], A_DIN[3:0]         |
|                             | A_WEN[1] = 1    | Write A_DIN[18:15], A_DIN[13:10]     |
| 512x40 (Two-port write)     | B_WEN[0] = 1    | Write B_DIN[9:0]                     |
|                             | B_WEN[1] = 1    | Write B_DIN[19:10]                   |
|                             | A_WEN[0] = 1    | Write A_DIN[9:0]                     |
|                             | A_WEN[1] = 1    | Write A_DIN[19:10]                   |
| 512x33 (Two-port ECC)       | B_WEN[1:0] = 11 | Write B_DIN[16:0]                    |
|                             | A_WEN[1:0] = 11 | Write A_DIN[15:0]                    |

A\_ADDR and B\_ADDR

The following table lists the address buses for the two ports. 14 bits are needed to address the 16K independent locations in x1 mode. In wider modes, fewer address bits are used. The required bits are MSB justified and unused LSB bits must be tied to 0. A\_ADDR is synchronized by A\_CLK while B\_ADDR is synchronized to B\_CLK. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_ADDR provides the read-address while B\_ADDR provides the write-address.

**Table 6-4. ADDRESS BUS USED AND UNUSED BITS**

| Depth x Width                                                     | A_ADDR/B_ADDR |                                    |
|-------------------------------------------------------------------|---------------|------------------------------------|
|                                                                   | Used Bits     | Unused Bits<br>(must be tied to 0) |
| 16Kx1                                                             | [13:0]        | None                               |
| 8Kx2                                                              | [13:1]        | [0]                                |
| 4Kx4, 4Kx5                                                        | [13:2]        | [1:0]                              |
| 2Kx8, 2Kx10                                                       | [13:3]        | [2:0]                              |
| 1Kx16, 1Kx20                                                      | [13:4]        | [3:0]                              |
| 512x32 (Two-port),<br>512x40 (Two-port),<br>512x33 (Two-port ECC) | [13:5]        | [4:0]                              |

A\_DIN and B\_DIN

The following table lists the data input buses for the two ports. The required bits are LSB justified and unused MSB bits must be tied to 0. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_DIN provides the MSB of the write-data while B\_DIN provides the LSB of the write-data.

**Table 6-5. DATA INPUT BUSES USED AND UNUSED BITS**

| Depth x Width | A_DIN/B_DIN                                                                     |                                    |
|---------------|---------------------------------------------------------------------------------|------------------------------------|
|               | Used Bits                                                                       | Unused Bits<br>(must be tied to 0) |
| 16Kx1         | [0]                                                                             | [19:1]                             |
| 8Kx2          | [1:0]                                                                           | [19:2]                             |
| 4Kx4          | [3:0]                                                                           | [19:4]                             |
| 4Kx5          | [4:0]                                                                           | [19:5]                             |
| 2Kx8          | [8:5] is [7:4]<br>[3:0] is [3:0]                                                | [19:9]<br>[4]                      |
| 2Kx10         | [9:0]                                                                           | [19:10]                            |
| 1Kx16         | [18:15] is [15:12]<br>[13:10] is [11:8]<br><br>[8:5] is [7:4]<br>[3:0] is [3:0] | [19]<br>[14]<br><br>[9]<br>[4]     |
| 1Kx20         | [19:0]                                                                          | None                               |

.....continued

| Depth x Width           | A_DIN/B_DIN                                                                                                                                                                                       |                                                                                                  |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|                         | Used Bits                                                                                                                                                                                         | Unused Bits<br>(must be tied to 0)                                                               |
| 512x32 (Two-port write) | A_DIN[18:15] is [31:28]<br>A_DIN[13:10] is [27:24] A_DIN[8:5]<br>is [23:20] A_DIN[3:0] is [19:16]<br>B_DIN[18:15] is [15:12] B_DIN[13:10]<br>is [11:8] B_DIN[8:5] is [7:4]<br>B_DIN[3:0] is [3:0] | A_DIN[19]<br>A_DIN[14]<br>A_DIN[9]<br>A_DIN[4]<br>B_DIN[19]<br>B_DIN[14]<br>B_DIN[9]<br>B_DIN[4] |
| 512x40 (Two-port write) | A_DIN[19:0] is [39:20] B_DIN[19:0] is<br>[19:0]                                                                                                                                                   | None                                                                                             |
| 512x33 (Two-port ECC)   | A_DIN[15:0] is [32:17] B_DIN[16:0] is<br>[16:0]                                                                                                                                                   | A_DIN[19:16]<br>B_DIN[19:17]                                                                     |

A\_DOUT and B\_DOUT

The following table lists the data output buses for the two ports. The required bits are LSB justified. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_DOUT provides the MSB of the read-data while B\_DOUT provides the LSB of the read-data.

**Table 6-6. DATA OUTPUT BUSES USED AND UNUSED BITS**

| Depth x Width | A_DOUT/B_DOUT                                                                   |                                    |
|---------------|---------------------------------------------------------------------------------|------------------------------------|
|               | Used Bits                                                                       | Unused Bits<br>(must be tied to 0) |
| 16Kx1         | [0]                                                                             | [19:1]                             |
| 8Kx2          | [1:0]                                                                           | [19:2]                             |
| 4Kx4          | [3:0]                                                                           | [19:4]                             |
| 4Kx5          | [4:0]                                                                           | [19:5]                             |
| 2Kx8          | [8:5] is [7:4]<br>[3:0] is [3:0]                                                | [19:9]<br>[4]                      |
| 2Kx10         | [9:0]                                                                           | [19:10]                            |
| 1Kx16         | [18:15] is [15:12]<br>[13:10] is [11:8]<br><br>[8:5] is [7:4]<br>[3:0] is [3:0] | [19]<br>[14]<br><br>[9]<br>[4]     |
| 1Kx20         | [19:0]                                                                          | None                               |

.....continued

| Depth x Width           | A_DOUT/B_DOUT                                                                                                                                                                                     |                                                                                                  |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|                         | Used Bits                                                                                                                                                                                         | Unused Bits<br>(must be tied to 0)                                                               |
| 512x32 (Two-port write) | A_DIN[18:15] is [31:28]<br>A_DIN[13:10] is [27:24] A_DIN[8:5]<br>is [23:20] A_DIN[3:0] is [19:16]<br>B_DIN[18:15] is [15:12] B_DIN[13:10]<br>is [11:8] B_DIN[8:5] is [7:4]<br>B_DIN[3:0] is [3:0] | A_DIN[19]<br>A_DIN[14]<br>A_DIN[9]<br>A_DIN[4]<br>B_DIN[19]<br>B_DIN[14]<br>B_DIN[9]<br>B_DIN[4] |
| 512x40 (Two-port write) | A_DOUT[19:0] is [39:20]<br>B_DOUT[19:0] is [19:0]                                                                                                                                                 | None                                                                                             |
| 512x33 (Two-port ECC)   | A_DOUT[15:0] is [32:17]<br>B_DOUT[16:0] is [16:0]                                                                                                                                                 | A_DOUT[19:16]<br>B_DOUT[19:17]                                                                   |

#### A\_BLK\_EN and B\_BLK\_EN

The following table lists the block-port select control signals for the two ports. A\_BLK is synchronized by A\_CLK while B\_BLK is synchronized to B\_CLK. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_BLK\_EN controls the read operation while B\_BLK\_EN controls the write operation.

**Table 6-7. BLOCK-PORT SELECT**

| Block-port Select Signal | Value            | Result                                                                                                                                                                |
|--------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A_BLK_EN[2:0]            | 111              | Perform read or write operation on Port A, unless the width is greater than 20 and a read is performed from both ports A and B.                                       |
| A_BLK_EN[2:0]            | Any one bit is 0 | No operation in memory from Port A. Port A read-data will be forced to 0. If the width is greater than 20, the read-data from both ports A and B will be forced to 0. |
| B_BLK_EN[2:0]            | 111              | Perform read or write operation on Port B, unless the width is greater than 20 and a write is performed to both ports A and B.                                        |
| B_BLK_EN[2:0]            | Any one bit is 0 | No operation in memory from Port B. Port B read-data will be forced to 0, unless the width is greater than 20 and write operation to both ports A and B is gated.     |

#### A\_WMODE and B\_WMODE

In true dual-port write mode, each port has a feed-through write or read-before-write option.

- Logic 00 = Read-data port holds the previous value.
  - Logic 01 = Feed-through, i.e. write-data appears on the corresponding read-data port. This setting is invalid when the width of at least one port is greater than 20 and the two-port mode is in effect.
  - Logic 10 = Read-before-write, i.e. previous content of the memory appears on the corresponding read-data port before it is overwritten. This setting is invalid when the width of at least one port is greater than 20 and the two-port mode is in effect.
- A\_CLK and B\_CLK

All signals in ports A and B are synchronous to the corresponding port clock. All address, data, block-port select, write-enable and read-enable inputs must be set up before the rising edge of the clock. The read or write operation

begins with the rising edge. Two-port mode is in effect when the width of at least one port is greater than 20, and A\_CLK provides the read clock while B\_CLK provides the write clock.

#### A\_REN and B\_REN

Enables read operation from the memory on the corresponding port. Two-port read mode is in effect when the width of port A is greater than 20, and A\_REN controls the read operation.

#### Read-data Pipeline Register Control Signals

A\_BYPASS and B\_BYPASS A\_DOUT\_EN and B\_DOUT\_EN A\_DOUT\_SRST\_N and B\_DOUT\_SRST\_N  
A\_DOUT\_ARST\_N and B\_DOUT\_ARST\_N

Two-port mode is in effect when the width of at least one port is greater than 20, and the A\_DOUT register signals control both the MSB and LSB of the read-data, and the B\_DOUT register signals are “don’t-cares”.

The following table describes the functionality of the control signals on the A\_DOUT and B\_DOUT pipeline registers.

**Table 6-8. TRUTH TABLE FOR A\_DOUT AND B\_DOUT REGISTERS**

| ARST_N | _BYPASS | _CLK       | _EN | _SRST_N | D | Q <sub>n+1</sub> |
|--------|---------|------------|-----|---------|---|------------------|
| 0      | X       | X          | X   | X       | X | 0                |
| 1      | 0       | Not rising | X   | X       | X | Q <sub>n</sub>   |
| 1      | 0       | ?          | 0   | X       | X | Q <sub>n</sub>   |
| 1      | 0       | ?          | 1   | 0       | X | 0                |
| 1      | 0       | ?          | 1   | 1       | D | D                |
| 1      | 1       | X          | X   | X       | D | D                |

#### ECC\_EN and ECC\_BYPASS

ECC operation is only allowed in Two-port mode and the width of both ports is greater than 20.

- ECC\_EN = 0: Disable ECC.
- ECC\_EN = 1, ECC\_BYPASS= 0: Enable ECC Pipelined.
- ECC Pipelined mode inserts an additional clock cycle to Read-data.
- In addition, Write-feed-thru and Read-before-write modes add another clock cycle to Read- data.
- ECC\_EN = 1, ECC\_BYPASS= 1: Enable ECC Non-pipelined.  
SB\_CORRECT and DB\_DETECT

Error detection and correction flags become available when ECC operation is enabled in Two-port mode and the width of both ports is greater than 20. The following table describes the functionality of the error detection and correction flags.

**Table 6-9. ERROR DETECTION AND CORRECTION FLAGS**

| DB_DETECT | SB_CORRECT | Flag                                                                   |
|-----------|------------|------------------------------------------------------------------------|
| 0         | 0          | No errors have been detected.                                          |
| 0         | 1          | A single bit error has been detected and corrected in the data output. |
| 1         | 1          | Multiple bit errors have been detected, but have not been corrected.   |

#### BUSY\_FB

Control signal, when 1 locks the entire RAM1K20 memory from being accessed by the FCB.

#### ACCESS\_BUSY

This output indicates that the RAM1K20 memory is being accessed by the FCB.

## 6.2 RAM64x12


The RAM64x12 block contains 768 memory bits and is a two-port memory providing one write port and one read port. Write operations to the RAM64x12 memory are synchronous. Read operations can be asynchronous or synchronous for setting up the address and reading out the data. Enabling synchronous operation at the read-address port improves setup timing for the read-address and its enable signals. Enabling synchronous operation at the read-data port improves clock-to-out delay. Each data port on the RAM64x12 memory is configured to a fixed configuration of 64x12.

### Functionality

The main features of the RAM64x12 memory block are as follows:

- There is one read-data port and one write-data port.
- Both read-data and write-data ports are configured to 64x12.
- The write operation is always synchronous. The write-address, write-data and write-enable inputs are registered.
- Setting up the read-address can be synchronous or asynchronous. The read-address registers have an independent enable, synchronous-load and asynchronous-load for synchronous mode operation, which can be bypassed for asynchronous mode operation.
- The read-data pipeline registers have an independent enable, synchronous-load and asynchronous-load for pipeline mode operation, which can be bypassed for asynchronous mode operation.
- Therefore, there are four read operation modes:
  - Synchronous read-address without read-data pipeline registers (sync-async)
  - Synchronous read-address with read-data pipeline registers (sync-sync)
  - Asynchronous read-address with read-data pipeline registers (async-sync)
  - Asynchronous read-address without read-data pipeline registers (async-async)
- There is an independent clock for each port. The memory will be triggered at the rising edge of the clock.
- Read and write on the same location at the same time results in unknown data to be read. There is no collision prevention or detection. However, correct data is expected to be written into the memory.

**Figure 6-2. Simplified Block Diagram of RAM64x12**

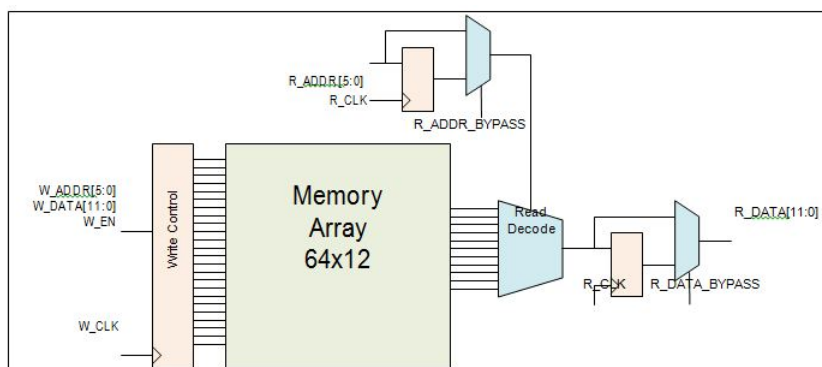

### Port List

The following table gives the port descriptions.

**Table 6-10. PORT LIST FOR RAM1K20**

| Pin Name | Pin Direction | Type <sup>1</sup> | Description                                                                                                                                                             | Polarity |
|----------|---------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| W_EN     | Input         | Dynamic           | Write port enable.                                                                                                                                                      | High     |
| W_CLK    | Input         | Dynamic           | Write clock. All write-address, write-data and write-enable inputs must be set up before the rising edge of the clock. The write operation begins with the rising edge. | Rising   |

.....continued

| Pin Name      | Pin Direction | Type <sup>1</sup> | Description                                                                                                                                                                           | Polarity |
|---------------|---------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| W_ADDR[5:0]   | Input         | Dynamic           | Write address.                                                                                                                                                                        | —        |
| W_DATA[11:0]  | Input         | Dynamic           | Write-data.                                                                                                                                                                           | —        |
| BLK_EN        | Input         | Dynamic           | Read port block select. When High, read operation is performed. When Low, read-data will be forced to zero. BLK_EN signal is registered through R_CLK when R_ADDR_BYPASS is Low.      | High     |
| R_CLK         | Input         | Dynamic           | Read registers clock. All read-address, block- port select and read-enable inputs must be set up before the rising edge of the clock. The read operation begins with the rising edge. | Rising   |
| R_ADDR[5:0]   | Input         | Dynamic           | Read-address.                                                                                                                                                                         | —        |
| R_ADDR_BYPASS | Input         | Static            | Read-address and BLK_EN register select.                                                                                                                                              | Low      |
| R_ADDR_EN     | Input         | Dynamic           | Read-address register enable.                                                                                                                                                         | High     |
| R_ADDR_SL_N   | Input         | Dynamic           | Read-address register synchronous load.                                                                                                                                               | Low      |
| R_ADDR_SD     | Input         | Static            | Read-address register synchronous load data.                                                                                                                                          | High     |
| R_ADDR_AL_N   | Input         | Dynamic           | Read-address register asynchronous load.                                                                                                                                              | Low      |
| R_ADDR_AD_N   | Input         | Static            | Read-address register asynchronous load data.                                                                                                                                         | Low      |
| R_DATA[11:0]  | Output        | Dynamic           | Read-data.                                                                                                                                                                            | —        |
| R_DATA_BYPASS | Input         | Static            | Read-data pipeline register select.                                                                                                                                                   | Low      |
| R_DATA_EN     | Input         | Dynamic           | Read-data pipeline register enable.                                                                                                                                                   | High     |
| R_DATA_SL_N   | Input         | Dynamic           | Read-data pipeline register synchronous load.                                                                                                                                         | Low      |
| R_DATA_SD     | Input         | Static            | Read-data pipeline register synchronous load data.                                                                                                                                    | High     |
| R_DATA_AL_N   | Input         | Dynamic           | Read-data pipeline register asynchronous load.                                                                                                                                        | Low      |
| R_DATA_AD_N   | Input         | Dynamic           | Read-data pipeline register asynchronous load data.                                                                                                                                   | Low      |
| BUSY_FB       | Input         | Static            | Lock access to FCB.                                                                                                                                                                   | High     |
| ACCESS_BUSY   | Output        | Dynamic           | Busy signal from FCB.                                                                                                                                                                 | High     |

Static inputs are defined at design time and need to be tied to 0 or 1.

Read-address and Read-data Pipeline Register Control Signals

The following table describes the functionality of the control signals on the R\_ADDR and R\_DATA registers.

Table 6-11. TRUTH TABLE FOR R\_ADDR AND R\_DATA REGISTERS

| _AL_N | _AD_N           | _BYPAS<br>S | _CLK       | _EN | _SL_N | _SD | D | Q <sub>n+1</sub> |
|-------|-----------------|-------------|------------|-----|-------|-----|---|------------------|
| 0     | AD <sub>n</sub> | X           | X          | X   | X     | X   | X | !AD <sub>n</sub> |
| 1     | X               | 0           | Not rising | X   | X     | X   | X | Q <sub>n</sub>   |
| 1     | X               | 0           | ?          | 0   | X     | X   | X | Q <sub>n</sub>   |
| 1     | X               | 0           | ?          | 1   | 0     | SD  | X | SD               |
| 1     | X               | 0           | ?          | 1   | 1     | X   | D | D                |
| 1     | X               | 1           | X          | X   | X     | X   | D | D                |

## 7. MACC\_PA

The MACC\_PA macro implements multiplication, multiply-add, and multiply-accumulate functions. The MACC\_PA block can accumulate the current multiplication product with a previous result, a constant, a dynamic value, or a result from another MACC\_PA block. Each MACC\_PA block can also be configured to perform a Dot-product operation. All the signals of the MACC\_PA block have optional registers.

### 7.1 Features

The main features of the MACC\_PA block are as follows:

- Native 18 x 18 signed multiplication and supports 17 x 17 unsigned multiplication.
- Independent third input C of data width 48 bits along with a CARRYIN, optionally registered.
- Pre-adder of B with an independent fourth input D of data width 18 bits, optionally registered.
- Internal cascade signals (48-bit CDIN and CDOUT) enable cascading of the Math blocks to support larger accumulator, adder, and subtractor without extra logic.
- Normal addition/subtraction:  $CARRYIN + C[47:0] + E[47:0] \pm \{ (B[17:0] \pm D[17:0]) \times A[17:0] \}$ .
- Dot product mode:  $(B[8:0] \pm D[8:0]) \times A[17:9] \pm (B[17:9] \pm D[17:9]) \times A[8:0]$ .
- SIMD mode for dual independent multiplication of two pairs of 9-bit operands.
- Supports both registered and unregistered inputs and outputs.
- Arithmetic right-shift by 17 bits of the loopback of CDIN.

The following figure shows a simplified block diagram of the MACC\_PA block.

Figure 7-1. SIMPLIFIED BLOCK DIAGRAM OF MACC\_PA

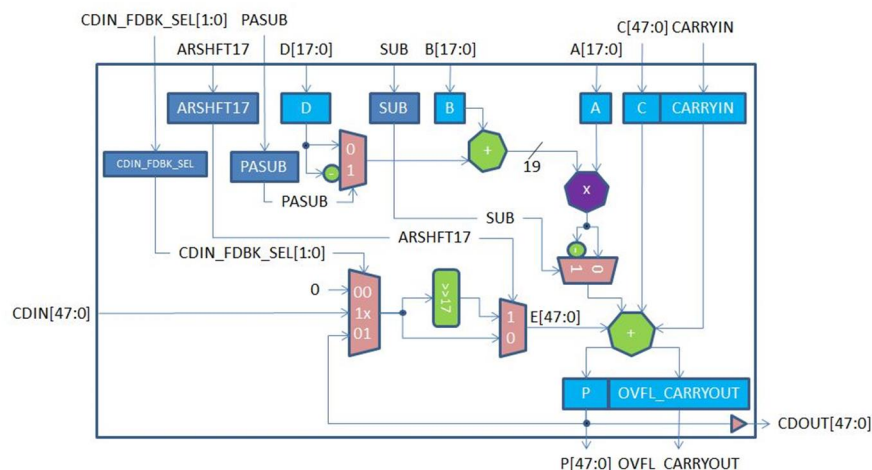


Table 7-1. MACC\_PA PIN DESCRIPTIONS

| Port Name | Direction | Type   | Polarity | Description                                                                                                                                                                                                                    |
|-----------|-----------|--------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOTP      | Input     | Static | High     | Dot-product mode.<br>When DOTP = 1, MACC_PA block performs Dot-product of two pairs of 9-bit operands. <ul style="list-style-type: none"> <li>• SIMD must not be 1.</li> <li>• C[8:0] must be connected to CARRYIN.</li> </ul> |

|                   |       |         |             |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------|---------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SIMD              | Input | Static  | High        | <p>SIMD mode.<br/>When SIMD = 1, MACC_PA block performs dual independent multiplication of two pairs of 9-bit operands.</p> <ul style="list-style-type: none"> <li>• DOTP must not be 1.</li> <li>• ARSHFT17 must be 0.</li> <li>• D[8:0] must be 0.</li> <li>• C[17:0] must be 0.</li> <li>• E[17:0] must be 0.</li> </ul> <p>Refer to <a href="#">Table 7-2</a> to see how operand E is obtained from P, CDIN or 0.</p> |
| OVFL_CARRYOUT_SEL | Input | Static  | High        | <p>Generate OVERFLOW or CARRYOUT with result P.</p> <ul style="list-style-type: none"> <li>• OVERFLOW when OVFL_CARRYOUT_SEL = 0</li> <li>• CARRYOUT when OVFL_CARRYOUT_SEL = 1</li> </ul>                                                                                                                                                                                                                                |
| CLK               | Input | Dynamic | Rising edge | Clock for A, B, C, CARRYIN, D, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers.                                                                                                                                                                                                                                                                                                                        |
| AL_N              | Input | Dynamic | Low         | <p>Asynchronous load for A, B, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers. Connect to 1, if none are registered.</p> <p>When asserted, A, B, P and OVFL_CARRYOUT registers are loaded with zero, while the ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers are loaded with the complementary value of the respective _AD_N.</p>                                                                  |
| A[17:0]           | Input | Dynamic | High        | Input data A.                                                                                                                                                                                                                                                                                                                                                                                                             |
| A_BYPASS          | Input | Static  | High        | Bypass data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                                 |
| A_SRST_N          | Input | Dynamic | Low         | Synchronous reset for data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                  |
| A_EN              | Input | Dynamic | High        | Enable for data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                             |
| B[17:0]           | Input | Dynamic | High        | Input data B to Pre-adder with data D.                                                                                                                                                                                                                                                                                                                                                                                    |
| B_BYPASS          | Input | Static  | High        | Bypass data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                                 |
| B_SRST_N          | Input | Dynamic | Low         | Synchronous reset for data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                  |
| B_EN              | Input | Dynamic | High        | Enable for data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                             |
| D[17:0]           | Input | Dynamic | High        | Input data D to Pre-adder with data B. When SIMD = 1, connect D[8:0] to 0.                                                                                                                                                                                                                                                                                                                                                |
| D_BYPASS          | Input | Static  | High        | Bypass data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                                                                                                                                 |
| D_ARST_N          | Input | Dynamic | Low         | Asynchronous reset for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                                                                                                                 |

|               |        |         |      |                                                                                                                                                                                                                                                                                                                                      |
|---------------|--------|---------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D_SRST_N      | Input  | Dynamic | Low  | Synchronous reset for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                             |
| D_EN          | Input  | Dynamic | High | Enable for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                                        |
| CARRYIN       | Input  | Dynamic | High | CARRYIN for input data C.                                                                                                                                                                                                                                                                                                            |
| C[47:0]       | Input  | Dynamic | High | Input data C.<br>When DOTP = 1, connect C[8:0] to CARRYIN. When SIMD = 1, connect C[8:0] to 0.                                                                                                                                                                                                                                       |
| C_BYPASS      | Input  | Static  | High | Bypass CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                                     |
| C_ARST_N      | Input  | Dynamic | Low  | Asynchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                     |
| C_SRST_N      | Input  | Dynamic | Low  | Synchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                      |
| C_EN          | Input  | Dynamic | High | Enable for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                                                                                                                                                                                 |
| CDIN[47:0]    | Input  | Cascade | High | Cascaded input for operand E.<br>The entire bus must be driven by an entire CDOUT of another MACC_PA or MACC_PA_BC_ROM block. In Dot-product mode, the driving CDOUT must also be generated by a MACC_PA or MACC_PA_BC_ROM block in Dot-product mode. Refer to <a href="#">Table 7-2</a> to see how CDIN is propagated to operand E. |
| P[47:0]       | Output |         | High | Result data. See <a href="#">Table 7-3</a> .                                                                                                                                                                                                                                                                                         |
| OVFL_CARRYOUT | Output |         | High | OVERFLOW or CARRYOUT. See <a href="#">Table 7-4</a> .                                                                                                                                                                                                                                                                                |
| P_BYPASS      | Input  | Static  | High | Bypass P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .<br>P_BYPASS must be 0 when CDIN_FDBK_SEL[0] = 1. See <a href="#">Table 7-2</a> .                                                                                                                                              |
| P_SRST_N      | Input  | Dynamic | Low  | Synchronous reset for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                |
| P_EN          | Input  | Dynamic | High | Enable for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                           |

|                                                                 |        |         |      |                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------|--------|---------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDOUT[47:0]                                                     | Output | Cascade | High | Cascade output of result P. See <a href="#">Table 7-3</a> .<br>Value of CDOUT is the same as P. The entire bus must either be dangling or drive an entire CDIN of another MACC_PA or MACC_PA_BC_ROM block in cascaded mode.<br><br>must either be dangling or drive an entire CDIN of another MACC_PA or MACC_PA_BC_ROM block in cascaded mode. |
| PASUB                                                           | Input  | Dynamic | High | Subtract operation for Pre-adder of B and D.                                                                                                                                                                                                                                                                                                    |
| PASUB_BYPASS                                                    | Input  | Static  | High | Bypass PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                         |
| PASUB_AD_N                                                      | Input  | Static  | Low  | Asynchronous load data for PASUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                                      |
| PASUB_SL_N                                                      | Input  | Dynamic | Low  | Synchronous load for PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                           |
| PASUB_SD_N                                                      | Input  | Static  | Low  | Synchronous load data for PASUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                                       |
| PASUB_EN                                                        | Input  | Dynamic | High | Enable for PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                     |
| CDIN_FDBK_SEL[1:0]                                              | Input  | Dynamic | High | Select CDIN, P or 0 for operand E. See <a href="#">Table 7-2</a> .                                                                                                                                                                                                                                                                              |
| CDIN_FDBK_SEL_BYPASS                                            | Input  | Static  | High | Bypass CDIN_FDBK_SEL register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                 |
| CDIN_FDBK_SEL_AD_N[1:0]<br>[1:0]                                | Input  | Static  | Low  | Asynchronous load data for CDIN_FDBK_SEL register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                              |
| CDIN_FDBK_SEL_SL_N                                              | Input  | Dynamic | Low  | Synchronous load for CDIN_FDBK_SEL register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                   |
| CDIN_FDBK_SEL_SD_N[1:0]<br>[1:0]<br>CDIN_FDBK_SEL_SD_N<br>[1:0] | Input  | Static  | Low  | Synchronous load data for CDIN_FDBK_SEL register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                               |
| CDIN_FDBK_SEL_EN                                                | Input  | Dynamic | High | Enable for CDIN_FDBK_SEL register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                             |
| ARSHFT17                                                        | Input  | Dynamic | High | Arithmetic right-shift for operand E.<br>When asserted, a 17-bit arithmetic right-shift is performed on operand E. Refer to <a href="#">Table 7-2</a> to see how operand E is obtained from P, CDIN or 0. When SIMD = 1, ARSHFT17 must be 0.                                                                                                    |
| ARSHFT17_BYPASS                                                 | Input  | Static  | High | Bypass ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                      |

|               |       |         |      |                                                                                                          |
|---------------|-------|---------|------|----------------------------------------------------------------------------------------------------------|
| ARSHFT17_AD_N | Input | Static  | Low  | Asynchronous load data for ARSHFT17 register. See <a href="#">Table 7-5</a> .                            |
| ARSHFT17_SL_N | Input | Dynamic | Low  | Synchronous load for ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> . |
| ARSHFT17_SD_N | Input | Static  | Low  | Synchronous load data for ARSHFT17 register. See <a href="#">Table 7-5</a> .                             |
| ARSHFT17_EN   | Input | Dynamic | High | Enable for ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .           |
| SUB           | Input | Dynamic | High | Subtract operation.                                                                                      |
| SUB_BYPASS    | Input | Static  | High | Bypass SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                    |
| SUB_AD_N      | Input | Static  | Low  | Asynchronous load data for SUB register. See <a href="#">Table 7-5</a> .                                 |
| SUB_SL_N      | Input | Dynamic | Low  | Synchronous load for SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .      |
| SUB_SD_N      | Input | Static  | Low  | Synchronous load data for SUB register. See <a href="#">Table 7-5</a> .                                  |
| SUB_EN        | Input | Dynamic | High | Enable for SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                |

Static inputs are defined at design time and need to be tied to 0 or 1.

**Table 7-2. TRUTH TABLE—PROPAGATING DATA TO OPERAND E**

| CDIN_FDBK_SEL[1] | CDIN_FDBK_SEL[0] | ARSHFT17 | Operand E                    |
|------------------|------------------|----------|------------------------------|
| 0                | 0                | X        | 48'b0                        |
| 0                | 1                | 0        | P[47:0]                      |
| 0                | 1                | 1        | {{17{P[47]}},P[47:17]}       |
| 1                | X                | 0        | CDIN[47:0]                   |
| 1                | X                | 1        | {{17{CDIN[47]}},CDIN[47:17]} |

**Table 7-3. TRUTH TABLE - COMPUTATION OF RESULT P AND CDOUT**

| SIMD | DOTP | SUB | PASUB | Result P and CDOUT                                                                                                   |
|------|------|-----|-------|----------------------------------------------------------------------------------------------------------------------|
| 0    | 0    | 0   | 0     | $CARRYIN + C[47:0] + E[47:0] + \{ (B[17:0] + D[17:0]) \times A[17:0] \}$                                             |
| 0    | 0    | 0   | 1     | $CARRYIN + C[47:0] + E[47:0] + \{ (B[17:0] - D[17:0]) \times A[17:0] \}$                                             |
| 0    | 0    | 1   | 0     | $CARRYIN + C[47:0] + E[47:0] - \{ (B[17:0] + D[17:0]) \times A[17:0] \}$                                             |
| 0    | 0    | 1   | 1     | $CARRYIN + C[47:0] + E[47:0] - \{ (B[17:0] - D[17:0]) \times A[17:0] \}$                                             |
| 0    | 1    | 0   | 0     | $CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] + D[8:0]) \times A[17:9] + (B[17:9] + D[17:9]) \times A[8:0] \} \times 29$ |
| 0    | 1    | 0   | 1     | $CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] - D[8:0]) \times A[17:9] + (B[17:9] - D[17:9]) \times A[8:0] \} \times 29$ |
| 0    | 1    | 1   | 0     | $CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] + D[8:0]) \times A[17:9] - (B[17:9] + D[17:9]) \times A[8:0] \} \times 29$ |

|   |   |   |   |                                                                                                                                 |
|---|---|---|---|---------------------------------------------------------------------------------------------------------------------------------|
| 0 | 1 | 1 | 1 | $CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] - D[8:0]) \times A[17:9] - (B[17:9] - D[17:9]) \times A[8:0] \} \times 29$            |
| 1 | 0 | 0 | 0 | $P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$<br>$P[47:18] = C[47:18] + E[47:18] + \{ (B[17:9] + D[17:9]) \times A[17:9] \}$ |
| 1 | 0 | 0 | 1 | $P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$<br>$P[47:18] = C[47:18] + E[47:18] + \{ (B[17:9] - D[17:9]) \times A[17:9] \}$ |
| 1 | 0 | 1 | 0 | $P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$<br>$P[47:18] = C[47:18] + E[47:18] - \{ (B[17:9] + D[17:9]) \times A[17:9] \}$ |
| 1 | 0 | 1 | 1 | $P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$<br>$P[47:18] = C[47:18] + E[47:18] - \{ (B[17:9] - D[17:9]) \times A[17:9] \}$ |

Table 7-4. TRUTH TABLE - COMPUTATION OF OVFL\_CARRYOUT

| OVFL_CARRYOUT_SEL | OVFL_CARRYOUT                                            | Description                                                        |
|-------------------|----------------------------------------------------------|--------------------------------------------------------------------|
| 0                 | $(SUM[49] \wedge SUM[48]) \mid (SUM[48] \wedge SUM[47])$ | True if overflow or underflow occurred.                            |
| 1                 | $C[47] \wedge E[47] \wedge SUM[48]$                      | A signal that can be used to extend the final adder in the fabric. |

SUM[49:0] is defined similarly to P[47:0] as shown in Table 7-3, except that SUM is a 50-bit quantity so that no overflow can occur. SUM[48] is the carry out bit of a 48-bit final adder producing P[47:0].

Table 7-5. TRUTH TABLE FOR CONTROL REGISTERS ARSHFT17, CDIN\_FDBK\_SEL, PASUB AND SUB

| AL_N | _AD_N | _BYPASS | CLK        | _EN | _SL_N | _SD_N | D | Qn+1  |
|------|-------|---------|------------|-----|-------|-------|---|-------|
| 0    | AD_N  | 0       | X          | X   | X     | X     | X | !AD_N |
| 1    | X     | 0       | Not rising | X   | X     | X     | X | Qn    |
| 1    | X     | 0       | ?          | 0   | X     | X     | X | Qn    |
| 1    | X     | 0       | ?          | 1   | 0     | SD_N  | X | !SD_N |
| 1    | X     | 0       | ?          | 1   | 1     | X     | D | D     |
| X    | X     | 1       | X          | 0   | X     | X     | X | Qn    |
| X    | X     | 1       | X          | 1   | 0     | SD_N  | X | !SD_N |
| X    | X     | 1       | X          | 1   | 1     | X     | D | D     |

Table 7-6. TRUTH TABLE - DATA REGISTERS A, B, P AND OVFL\_CARRYOUT

| AL_N | _BYPASS | CLK        | _EN | _SRST_N | D | Qn+1 |
|------|---------|------------|-----|---------|---|------|
| 0    | 0       | X          | X   | X       | X | 0    |
| 1    | 0       | Not rising | X   | X       | X | Qn   |
| 1    | 0       | ?          | 0   | X       | X | Qn   |
| 1    | 0       | ?          | 1   | 0       | X | 0    |
| 1    | 0       | ?          | 1   | 1       | D | D    |
| X    | 1       | X          | 0   | X       | X | Qn   |
| X    | 1       | X          | 1   | 0       | X | 0    |

|   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|
| X | 1 | X | 1 | 1 | D | D |
|---|---|---|---|---|---|---|

Table 7-7. TRUTH TABLE - DATA REGISTERS C, CARRYIN AND D

| _ARST_N | _BYPASS | CLK        | _EN | _SRST_N | D | Qn+1 |
|---------|---------|------------|-----|---------|---|------|
| 0       | 0       | X          | X   | X       | X | 0    |
| 1       | 0       | Not rising | X   | X       | X | Qn   |
| 1       | 0       | ?          | 0   | X       | X | Qn   |
| 1       | 0       | ?          | 1   | 0       | X | 0    |
| 1       | 0       | ?          | 1   | 1       | D | D    |
| X       | 1       | X          | 0   | X       | X | Qn   |
| X       | 1       | X          | 1   | 0       | X | 0    |
| X       | 1       | X          | 1   | 1       | D | D    |

## 7.2 MACC\_PA\_BC\_ROM

The MACC\_PA\_BC\_ROM macro extends the functionality of the MACC\_PA macro to provide a 16x18 ROM at the A input along with a pipelined output of B for cascading.


## 7.3 Features

The additional features of the MACC\_PA\_BC\_ROM block are as follows:

- Selection of the A input from a 16x18 ROM.
- Additional pipelining of the B input for cascading to the next Math block or output to the fabric.
- Due to routing bandwidth limitations, either result P or B2 output can be used in the same MACC\_PA\_BC\_ROM block.

The following table shows a simplified block diagram of the MACC\_PA\_BC\_ROM block.

Figure 7-2. SIMPLIFIED BLOCK DIAGRAM OF MACC\_PA

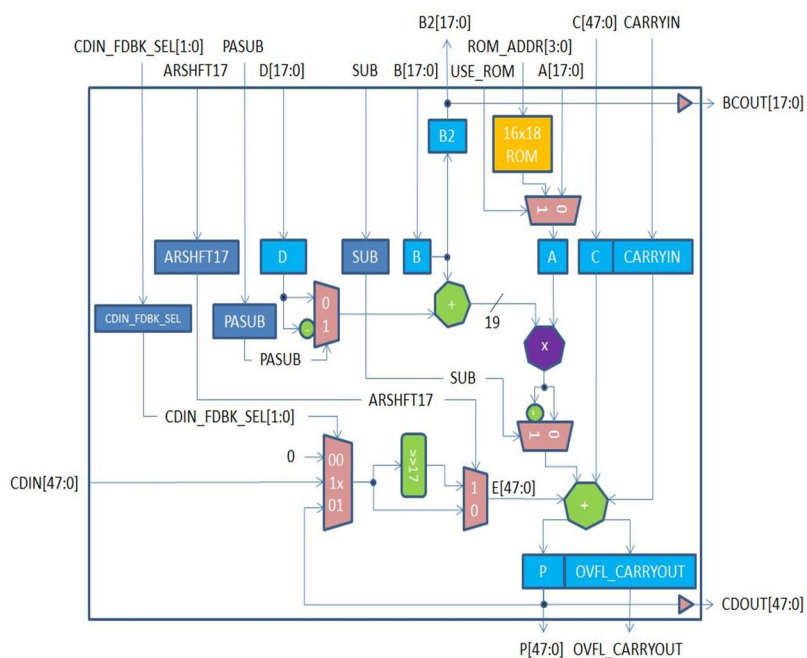

## 7.4 Parameters

There is one parameter, INIT, to hold the 16x18 ROM content as a linear array. The first 18 bits is word 0, the next 18 bits is word 1, and so on.

Table 7-8. MACC\_PA\_BC\_ROM PARAMETER DESCRIPTIONS

| Parameter | Dimensions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Description                              |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| INIT      | parameter [287:0] INIT = {<br>18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0,<br>18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0<br>};                                                                                                                                                                                                                                                                                                                                              | 16 x 18 ROM content specified in Verilog |
| INIT      | generic map(INIT => (<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"&<br>B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000")<br>) | 16 x 18 ROM content specified in VHDL    |

PORT LIST

Table 7-9. MACC\_PA\_BC\_ROM PIN DESCRIPTIONS

| Port Name         | Direction | Type             | Polarity    | Description                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------|-----------|------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOTP              | Input     | Static           | High        | Dot-product mode.<br>When DOTP = 1, MACC_PA_BC_ROM block performs Dot-product of two pairs of 9-bit operands.<br><ul style="list-style-type: none"> <li>SIMD must not be 1.</li> <li>C[8:0] must be connected to CARRYIN.</li> </ul>                                                                                                                                                                       |
| SIMD              | Input     | Static           | High        | SIMD mode.<br>When SIMD = 1, MACC_PA_BC_ROM block performs dual independent multiplication of two pairs of 9-bit operands.<br><ul style="list-style-type: none"> <li>DOTP must not be 1.</li> <li>ARSHFT17 must be 0.</li> <li>D[8:0] must be 0.</li> <li>C[17:0] must be 0.</li> <li>E[17:0] must be 0. Refer to <a href="#">Table 7-2</a> to see how operand E is obtained from P, CDIN or 0.</li> </ul> |
| OVFL_CARRYOUT_SEL | Input     | Static           | High        | Generate OVERFLOW or CARRYOUT with result P.<br><ul style="list-style-type: none"> <li>OVERFLOW when OVFL_CARRYOUT_SEL = 0</li> <li>CARRYOUT when OVFL_CARRYOUT_SEL = 1</li> </ul>                                                                                                                                                                                                                         |
| CLK               | Input     | Dynamic          | Rising edge | Clock for A, B, C, CARRYIN, D, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers.                                                                                                                                                                                                                                                                                                         |
| AL_N              | Input     | Dynamic          | Low         | Asynchronous load for A, B, B2, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers. Connect to 1, if none are registered.<br>When asserted, A, B, P and OVFL_CARRYOUT registers are loaded with zero, while the ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers are loaded with the complementary value of the respective _AD_N.                                                          |
| USE_ROM           | Input     | Static (virtual) | High        | Selection for operand A.<br><ul style="list-style-type: none"> <li>When USE_ROM = 0, select input data A.</li> <li>When USE_ROM = 1, select ROM data at ROM_ADDR.</li> </ul>                                                                                                                                                                                                                               |
| ROM_ADDR[3:0]     | Input     | Dynamic          | High        | Address of ROM data for operand A when USE_ROM = 1.                                                                                                                                                                                                                                                                                                                                                        |
| A[17:0]           | Input     | Static           | High        | Input data for operand A when USE_ROM = 0.                                                                                                                                                                                                                                                                                                                                                                 |
| A_BYPASS          | Input     | Dynamic          | High        | Bypass data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                                  |
| A_SRST_N          | Input     | Dynamic          | Low         | Synchronous reset for data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                   |
| A_EN              | Input     | Dynamic          | High        | Enable for data A registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                                                                                              |

|             |        |         |      |                                                                                                                                                                       |
|-------------|--------|---------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B[17:0]     | Input  | Dynamic | High | Input data B to Pre-adder with data D.                                                                                                                                |
| B_BYPASS    | Input  | Static  | High | Bypass data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                             |
| B_SRST_N    | Input  | Dynamic | Low  | Synchronous reset for data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                              |
| B_EN        | Input  | Dynamic | High | Enable for data B registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                         |
| B2[17:0]    | Output | Dynamic | High | Pipelined output of input data B. Result P should be floating when B2 is used.                                                                                        |
| B2_BYPASS   | Input  | Static  | High | Bypass data B2 registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                            |
| B2_SRST_N   | Input  | Dynamic | Low  | Synchronous reset for data B2 registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                             |
| B2_EN       | Input  | Dynamic | High | Enable for data B2 registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                        |
| BCOUT[17:0] | Output | Cascade | High | Cascade output of B2. Value of BCOUT is the same as B2. The entire bus must either be dangling or drive an entire B input of another MACC_PA or MACC_PA_BC_ROM block. |
| D[17:0]     | Input  | Dynamic | High | Input data D to Pre-adder with data B. When SIMD = 1, connect D[8:0] to 0.                                                                                            |
| D_BYPASS    | Input  | Static  | High | Bypass data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                             |
| D_ARST_N    | Input  | Dynamic | Low  | Asynchronous reset for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                             |
| D_SRST_N    | Input  | Dynamic | Low  | Synchronous reset for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                              |
| D_EN        | Input  | Dynamic | High | Enable for data D registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                         |
| CARRYIN     | Input  | Dynamic | High | CARRYIN for input data C.                                                                                                                                             |
| C[47:0]     | Input  | Dynamic | High | Input data C.<br>When DOTP = 1, connect C[8:0] to CARRYIN. When SIMD = 1, connect C[8:0] to 0.                                                                        |
| C_BYPASS    | Input  | Static  | High | Bypass CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                      |
| C_ARST_N    | Input  | Dynamic | Low  | Asynchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                      |
| C_SRST_N    | Input  | Dynamic | Low  | Synchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                       |
| C_EN        | Input  | Dynamic | High | Enable for CARRYIN and C registers. Connect to 1, if not registered. See <a href="#">Table 7-7</a> .                                                                  |

|                         |        |         |      |                                                                                                                                                                                                                                                                                                                                           |
|-------------------------|--------|---------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDIN[47:0]              | Input  | Cascade | High | Cascaded input for operand E.<br>The entire bus must be driven by an entire CDOUT of another MACC_PA or MAC_PA_BC_ROM block. In Dot-product mode, the driving CDOUT must also be generated by a MACC_PA or MAC_PA_BC_ROM block in Dot-product mode.<br><br>Refer to <a href="#">Table 7-2</a> to see how CDIN is propagated to operand E. |
| P[47:0]                 | Output |         | High | Result data. See <a href="#">Table 7-3</a> . B2 output should be floating when P is used.                                                                                                                                                                                                                                                 |
| OVFL_CARRYOUT           | Output |         | High | OVERFLOW or CARRYOUT. See <a href="#">Table 7-4</a> .                                                                                                                                                                                                                                                                                     |
| P_BYPASS                | Input  | Static  | High | Bypass P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .<br>P_BYPASS must be 0 when CDIN_FDBK_SEL[0] = 1. See <a href="#">Table 7-2</a> .                                                                                                                                                   |
| P_SRST_N                | Input  | Dynamic | Low  | Synchronous reset for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                     |
| P_EN                    | Input  | Dynamic | High | Enable for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See <a href="#">Table 7-6</a> .                                                                                                                                                                                                                                |
| CDOUT[47:0]             | Output | Cascade | High | Cascade output of result P. See <a href="#">Table 7-3</a> .<br>Value of CDOUT is the same as P. The entire bus must either be dangling or drive an entire CDIN of another MACC_PA or MAC_PA_BC_ROM block incascaded mode.                                                                                                                 |
| PASUB                   | Input  | Dynamic | High | Subtract operation for Pre-adder of B and D.                                                                                                                                                                                                                                                                                              |
| PASUB_BYPASS            | Input  | Static  | High | Bypass PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                   |
| PASUB_AD_N              | Input  | Static  | Low  | Asynchronous load data for PASUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                                |
| PASUB_SL_N              | Input  | Dynamic | Low  | Synchronous load for PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                     |
| PASUB_SD_N              | Input  | Static  | Low  | Synchronous load data for PASUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                                 |
| PASUB_EN                | Input  | Dynamic | High | Enable for PASUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                               |
| CDIN_FDBK_SEL[1:0]      | Input  | Dynamic | High | Select CDIN, P or 0 for operand E. See <a href="#">Table 7-2</a> .                                                                                                                                                                                                                                                                        |
| CDIN_FDBK_SEL_BYPASS    | Input  | Static  | High | Select CDIN, P or 0 for operand E. See <a href="#">Table 7-2</a> .                                                                                                                                                                                                                                                                        |
| CDIN_FDBK_SEL_AD_N[1:0] | Input  | Static  | Low  | Asynchronous load data for CDIN_FDBK_SEL register. See <a href="#">Table 7-5</a> .                                                                                                                                                                                                                                                        |

|                          |       |         |      |                                                                                                                                                                                                                                           |
|--------------------------|-------|---------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CDIN_FDBK_SEL_SL_N       | Input | Dynamic | Low  | Synchronous load for CDIN_FDBK_SEL register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                             |
| CDIN_FDBK_SEL_SD_N [1:0] | Input | Static  | Low  | Synchronous load data for CDIN_FDBK_SEL register. See <a href="#">Table 7-5</a> .                                                                                                                                                         |
| CDIN_FDBK_SEL_EN         | Input | Dynamic | High | Enable for CDIN_FDBK_SEL register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                       |
| ARSHFT17                 | Input | Dynamic | High | Arithmetic right-shift for operand E. When asserted, a 17-bit arithmetic right-shift is performed on operand E. Refer to <a href="#">Table 7-2</a> to see how operand E is obtained from P, CDIN or 0. When SIMD = 1, ARSHFT17 must be 0. |
| ARSHFT17_BYPASS          | Input | Static  | High | Bypass ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                |
| ARSHFT17_AD_N            | Input | Static  | Low  | Asynchronous load data for ARSHFT17 register. See <a href="#">Table 7-5</a> .                                                                                                                                                             |
| ARSHFT17_SL_N            | Input | Dynamic | Low  | Synchronous load for ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                  |
| ARSHFT17_SD_N            | Input | Static  | Low  | Synchronous load data for ARSHFT17 register. See <a href="#">Table 7-5</a> .                                                                                                                                                              |
| ARSHFT17_EN              | Input | Dynamic | High | Enable for ARSHFT17 register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                            |
| SUB                      | Input | Dynamic | High | Subtract operation.                                                                                                                                                                                                                       |
| SUB_BYPASS               | Input | Static  | High | Bypass SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                     |
| SUB_AD_N                 | Input | Static  | Low  | Asynchronous load data for SUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                  |
| SUB_SL_N                 | Input | Dynamic | Low  | Synchronous load for SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                       |
| SUB_SD_N                 | Input | Static  | Low  | Synchronous load data for SUB register. See <a href="#">Table 7-5</a> .                                                                                                                                                                   |
| SUB_EN                   | Input | Dynamic | High | Enable for SUB register. Connect to 1, if not registered. See <a href="#">Table 7-5</a> .                                                                                                                                                 |

Static inputs are defined at design time and need to be tied to 0 or 1.

## 8. Revision History

| Revision | Date    | Description                                                                                                                                                                                                                            |
|----------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B        | 04/2021 | Editorial updates only. No technical content updates.                                                                                                                                                                                  |
| A        | 11/2020 | The following is a summary of changes made in this revision <ul style="list-style-type: none"><li>• Migrated the document from Microsemi to Microchip format.</li><li>• Formatted this document per Microchip's standards.</li></ul> . |

## 9. Microchip FPGA Technical Support

Microchip FPGA Products Group backs its products with various support services, including Customer Service, Customer Technical Support Center, a website, and worldwide sales offices. This section provides information about contacting Microchip FPGA Products Group and using these support services.

### 9.1 Customer Service

Contact Customer Service for non-technical product support, such as product pricing, product upgrades, update information, order status, and authorization.

- From North America, call **800.262.1060**
- From the rest of the world, call **650.318.4460**
- Fax, from anywhere in the world, **650.318.8044**

### 9.2 Customer Technical Support

Microchip FPGA Products Group staffs its Customer Technical Support Center with highly skilled engineers who can help answer your hardware, software, and design questions about Microchip FPGA Products. The Customer Technical Support Center spends a great deal of time creating application notes, answers to common design cycle questions, documentation of known issues, and various FAQs. So, before you contact us, please visit our online resources. It is very likely we have already answered your questions.

You can communicate your technical questions through our Web portal and receive answers back by email, fax, or phone. Also, if you have design problems, you can upload your design files to receive assistance. We constantly monitor the cases created from the web portal throughout the day. When sending your request to us, please be sure to include your full name, company name, and your contact information for efficient processing of your request.

Technical support can be reached at [soc.microsemi.com/Portal/Default.aspx](https://soc.microsemi.com/Portal/Default.aspx).

For technical support on RH and RT FPGAs that are regulated by International Traffic in Arms Regulations (ITAR), log in at [soc.microsemi.com/Portal/Default.aspx](https://soc.microsemi.com/Portal/Default.aspx), go to the **My Cases** tab, and select **Yes** in the ITAR drop-down list when creating a new case. For a complete list of ITAR-regulated Microchip FPGAs, visit the ITAR web page.

You can track technical cases online by going to [My Cases](#).

### 9.3 Website

You can browse a variety of technical and non-technical information on the Microchip FPGA Products Group [home page](#), at [www.microsemi.com/soc](https://www.microsemi.com/soc).

### 9.4 Outside the U.S.

Customers needing assistance outside the US time zones can either contact technical support at (<https://soc.microsemi.com/Portal/Default.aspx>) or contact a local sales office.

Visit [About Us](#) for [sales office listings](#) and [corporate contacts](#).

## The Microchip Website

---

Microchip provides online support via our website at [www.microchip.com/](http://www.microchip.com/). This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## Product Change Notification Service

---

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to [www.microchip.com/pcn](http://www.microchip.com/pcn) and follow the registration instructions.

## Customer Support

---

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: [www.microchip.com/support](http://www.microchip.com/support)

## Microchip Devices Code Protection Feature

---

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

## Legal Notice

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

## Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2021, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-7796-9

## **Quality Management System**

---

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

## Worldwide Sales and Service

| AMERICAS                                                                                                                                                                                                                                                                                               | ASIA/PACIFIC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | ASIA/PACIFIC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | EUROPE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Corporate Office</b><br>2355 West Chandler Blvd.<br>Chandler, AZ 85224-6199<br>Tel: 480-792-7200<br>Fax: 480-792-7277<br>Technical Support:<br><a href="http://www.microchip.com/support">www.microchip.com/support</a><br>Web Address:<br><a href="http://www.microchip.com">www.microchip.com</a> | <b>Australia - Sydney</b><br>Tel: 61-2-9868-6733<br><b>China - Beijing</b><br>Tel: 86-10-8569-7000<br><b>China - Chengdu</b><br>Tel: 86-28-8665-5511<br><b>China - Chongqing</b><br>Tel: 86-23-8980-9588<br><b>China - Dongguan</b><br>Tel: 86-769-8702-9880<br><b>China - Guangzhou</b><br>Tel: 86-20-8755-8029<br><b>China - Hangzhou</b><br>Tel: 86-571-8792-8115<br><b>China - Hong Kong SAR</b><br>Tel: 852-2943-5100<br><b>China - Nanjing</b><br>Tel: 86-25-8473-2460<br><b>China - Qingdao</b><br>Tel: 86-532-8502-7355<br><b>China - Shanghai</b><br>Tel: 86-21-3326-8000<br><b>China - Shenyang</b><br>Tel: 86-24-2334-2829<br><b>China - Shenzhen</b><br>Tel: 86-755-8864-2200<br><b>China - Suzhou</b><br>Tel: 86-186-6233-1526<br><b>China - Wuhan</b><br>Tel: 86-27-5980-5300<br><b>China - Xian</b><br>Tel: 86-29-8833-7252<br><b>China - Xiamen</b><br>Tel: 86-592-2388138<br><b>China - Zhuhai</b><br>Tel: 86-756-3210040 | <b>India - Bangalore</b><br>Tel: 91-80-3090-4444<br><b>India - New Delhi</b><br>Tel: 91-11-4160-8631<br><b>India - Pune</b><br>Tel: 91-20-4121-0141<br><b>Japan - Osaka</b><br>Tel: 81-6-6152-7160<br><b>Japan - Tokyo</b><br>Tel: 81-3-6880-3770<br><b>Korea - Daegu</b><br>Tel: 82-53-744-4301<br><b>Korea - Seoul</b><br>Tel: 82-2-554-7200<br><b>Malaysia - Kuala Lumpur</b><br>Tel: 60-3-7651-7906<br><b>Malaysia - Penang</b><br>Tel: 60-4-227-8870<br><b>Philippines - Manila</b><br>Tel: 63-2-634-9065<br><b>Singapore</b><br>Tel: 65-6334-8870<br><b>Taiwan - Hsin Chu</b><br>Tel: 886-3-577-8366<br><b>Taiwan - Kaohsiung</b><br>Tel: 886-7-213-7830<br><b>Taiwan - Taipei</b><br>Tel: 886-2-2508-8600<br><b>Thailand - Bangkok</b><br>Tel: 66-2-694-1351<br><b>Vietnam - Ho Chi Minh</b><br>Tel: 84-28-5448-2100 | <b>Austria - Wels</b><br>Tel: 43-7242-2244-39<br>Fax: 43-7242-2244-393<br><b>Denmark - Copenhagen</b><br>Tel: 45-4485-5910<br>Fax: 45-4485-2829<br><b>Finland - Espoo</b><br>Tel: 358-9-4520-820<br><b>France - Paris</b><br>Tel: 33-1-69-53-63-20<br>Fax: 33-1-69-30-90-79<br><b>Germany - Garching</b><br>Tel: 49-8931-9700<br><b>Germany - Haan</b><br>Tel: 49-2129-3766400<br><b>Germany - Heilbronn</b><br>Tel: 49-7131-72400<br><b>Germany - Karlsruhe</b><br>Tel: 49-721-625370<br><b>Germany - Munich</b><br>Tel: 49-89-627-144-0<br>Fax: 49-89-627-144-44<br><b>Germany - Rosenheim</b><br>Tel: 49-8031-354-560<br><b>Israel - Ra'anana</b><br>Tel: 972-9-744-7705<br><b>Italy - Milan</b><br>Tel: 39-0331-742611<br>Fax: 39-0331-466781<br><b>Italy - Padova</b><br>Tel: 39-049-7625286<br><b>Netherlands - Drunen</b><br>Tel: 31-416-690399<br>Fax: 31-416-690340<br><b>Norway - Trondheim</b><br>Tel: 47-72884388<br><b>Poland - Warsaw</b><br>Tel: 48-22-3325737<br><b>Romania - Bucharest</b><br>Tel: 40-21-407-87-50<br><b>Spain - Madrid</b><br>Tel: 34-91-708-08-90<br>Fax: 34-91-708-08-91<br><b>Sweden - Gothenberg</b><br>Tel: 46-31-704-60-40<br><b>Sweden - Stockholm</b><br>Tel: 46-8-5090-4654<br><b>UK - Wokingham</b><br>Tel: 44-118-921-5800<br>Fax: 44-118-921-5820 |