



a  **MICROCHIP** company

Total Ionizing Dose Test Report

No. 21T-RT4G150-LG1657- K0SN3

January 25, 2021

Table of Contents

| | |
|---|----|
| I. Summary Table..... | 3 |
| II. Total Ionizing Dose (TID) Testing..... | 3 |
| A. Device-Under-Test (DUT) and Irradiation Parameters | 3 |
| B. Test Method..... | 4 |
| C. Design and Parametric Measurements..... | 4 |
| III. Test Results..... | 5 |
| A. Functionality..... | 5 |
| B. Power Supply Current..... | 5 |
| C. Single-Ended Input Logic Threshold (VIL/VIH)..... | 19 |
| D. Output-Drive Voltage (VOL/VOH)..... | 19 |
| E. Propagation Delay..... | 26 |
| F. Transition Time | 26 |

I. SUMMARY TABLE

Table. 1. Summary

| Parameter | Tolerance |
|------------------------------|--|
| 1. Gross Functionality | Passed 125 krad(SiO ₂) |
| 2. Power Supply Current | Passed 125 krad(SiO ₂) |
| 3. Input Threshold (VIL/VIH) | Passed 125 krad(SiO ₂) |
| 4. Output Drive (VOL/VOH) | Passed 125 krad(SiO ₂) |
| 5. Propagation Delay | Passed 125 krad(SiO ₂) for 10% degradation criterion |
| 6. Transition Time | Passed 125 krad(SiO ₂) |

II. TOTAL IONIZING DOSE (TID) TESTING

This testing is designed on the basis of an extensive database of TID testing for Radiation-Tolerant FPGAs including flash-based FPGAs. Microsemi TID reports can be found at <http://www.microsemi.com/products/fpga-soc/radtolerant-fpgas/military-aerospace-radiation-reliability-data#tid-reports>

Electrical parameters are measured pre-irradiation and post-irradiation using the burn in design and the Automatic Test Equipment (ATE) program. The report summarizes sample pins.

A. Device-Under-Test (DUT) and Irradiation Parameters

Table 1 lists the DUT and irradiation parameters.

Table. 2. DUT and Irradiation Parameters

| | |
|----------------------------------|--|
| Part Number | RT4G150 |
| Package | LG1657 |
| Foundry | United Microelectronics Corp. |
| Technology | 65 nm |
| DUT Design | Burn in design with inverter string |
| Die Lot Number | K0SN3 |
| Quantity Tested | 6 |
| Serial Number (Dose) | 11675 (125 krad), 11677 (125 krad), 11684 (125 krad), 11744 (125 krad), 11772 (125 krad), 11817 (125 krad) |
| Radiation Facility | Defense Microelectronics Activity |
| Radiation Source | Co-60 |
| Dose Rate | 5 krad (SiO ₂)/min |
| Irradiation Temperature | Room |
| Irradiation and Measurement Bias | Static at 1.2V/2.5V/3.3V/3.3V |
| IO Configuration | Single ended Differential Pair |

B. Test Method

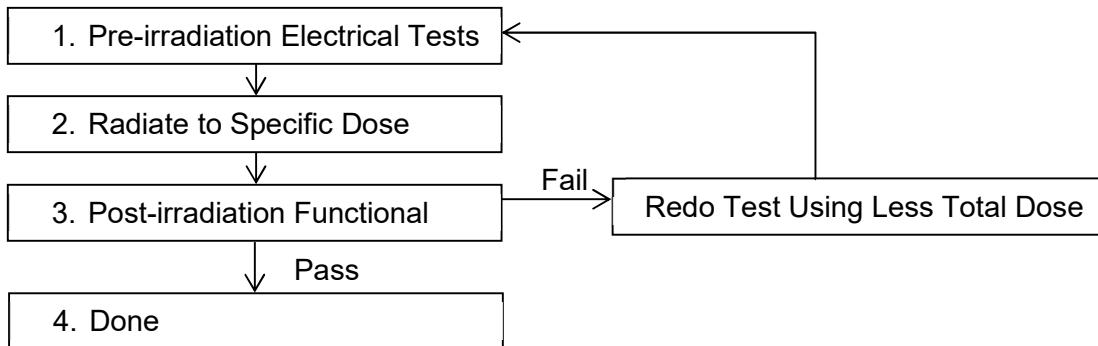


Fig. 1. Parametric test flow chart

The test method generally follows the guidelines in the military standard TM1019. Figure 1 shows the flow chart describing the steps for the functional and parametric tests.

C. Design and Parametric Measurements

RTG4 FPGA devices have different types of I/Os, such as MSIO and MSIOD, double data rate I/Os (DDRIO), and dedicated I/Os based on functional usage. For more information on I/O naming conventions and I/O description, refer to the RTG4 FPGA Pin Description. All I/Os are tested pre and post-irradiation.

Fabric functionality coverage performed by the burn in design is summarized in table 2 below. In addition to the fabric coverage the supplemental test of propagation delay is also used to determine DUT functionality. These tests are performed pre and post-irradiation and recorded as a pass/fail.

Refer to appendix A for a graphical representation of fabric functional coverage blocks used to perform the functional tests.

Table. 3. Fabric Functional Coverage

| Block | Coverage |
|----------------------|---|
| Combo Block | combinatorial macros available in the RTG4 library |
| Register Block | sequential macros available in the RTG4 library |
| UPROM | Maximum output toggle rate(checker board) compared to reference |
| Embedded SRAM Blocks | full toggle coverage on 209 fabric LSRAM & 210 µRAM blocks using dual port/ two port configurations (x18 width) |
| Shift Register Block | core utilization |
| I/O Block | I/O utilization |
| Math Block | full toggle coverage on 462 fabric math blocks with maximum width configuration |

The core power supply current IDD, the I/Os power supply currents (IDDI_2.5/IDDI_3.3) and the charge pump and PLL power supply current (IPP_PLL) are also monitored during irradiation in real time.

The input logic threshold (VIL/VIH) is measured on all single-ended inputs as well as all differential inputs, and is reported as a pass or fail, as part of the ATE test program. The output-drive voltage (VOL/VOH) is also measured on all pins on the MSIO MSIOD and DDRIO. This report contains the output-drive voltage measurements on selected IO pins used in the burn in design. LVTTL and LVCMOS 2.5V standard at different sourcing and sinking currents are reported.

A 2000 stage inverter string is used to measure the propagation delay. The propagation delay is defined as the time delay from the triggering edge at the Clock input to the switching edge at the output. The propagation delay is monitored real time during irradiation and the time difference between positive switching edges of the clock and output are reported. Additionally, the transition characteristics (rise and fall) at the output of the inverter chain are measured pre and post-irradiation. Oscilloscope screen captures are shown in section III. F.

III. TEST RESULTS

A. Functionality

Every DUT passed the pre-irradiation and post-irradiation functional tests mentioned in section II.C.

B. Power Supply Current

The core power supply current (IDD) is 1.2 V, the I/O bank power supply currents (IDDI) are 2.5 V (IDDI_2.5) and 3.3 V (IDDI_3.3). The charge pump and PLL power supply current (IPP_PLL) is 3.3 V. Figures 2-25 illustrate the plot of in-flux standby IDD, IDDI_2.5, IDDI_3.3 and IPP_PLL versus total dose for every DUT. Tables 3-6 summarize the pre-irradiation and post-irradiation total current (static & dynamic) IDD, IDDI_2.5, IDDI_3.3 and IPP_PLL.

Table. 4. Pre-irradiation and Post-irradiation I_{DD}

| DUT | Total Dose | Pre-irradiation (A) | Post-irradiation (A) | Increase (%) |
|-------|------------|---------------------|----------------------|--------------|
| 11675 | 125 krad | 0.4139 | 0.4271 | 3.19 |
| 11677 | 125 krad | 0.4021 | 0.4182 | 4.00 |
| 11684 | 125 krad | 0.4251 | 0.4430 | 4.21 |
| 11744 | 125 krad | 0.3649 | 0.3773 | 3.40 |
| 11772 | 125 krad | 0.4125 | 0.4300 | 4.24 |
| 11817 | 125 krad | 0.3985 | 0.4222 | 5.95 |

Table. 5. Pre-irradiation and Post-irradiation $I_{DDI_2.5}$

| DUT | Total Dose | Pre-irradiation (A) | Post-irradiation (A) | Increase (%) |
|-------|------------|---------------------|----------------------|--------------|
| 11675 | 125 krad | 0.0089 | 0.0110 | 23.60 |
| 11677 | 125 krad | 0.0115 | 0.0138 | 20.00 |
| 11684 | 125 krad | 0.0105 | 0.0128 | 21.90 |
| 11744 | 125 krad | 0.0091 | 0.0114 | 25.27 |
| 11772 | 125 krad | 0.0102 | 0.0125 | 22.55 |
| 11817 | 125 krad | 0.0096 | 0.0120 | 25.00 |

Table. 6. Pre-irradiation and Post-irradiation $I_{DDI_3.3}$

| DUT | Total Dose | Pre-irradiation (A) | Post-irradiation (A) | Increase (%) |
|-------|------------|---------------------|----------------------|--------------|
| 11675 | 125 krad | 0.0335 | 0.0366 | 9.25 |
| 11677 | 125 krad | 0.0330 | 0.0366 | 10.91 |
| 11684 | 125 krad | 0.0348 | 0.0375 | 7.76 |
| 11744 | 125 krad | 0.0335 | 0.0363 | 8.36 |
| 11772 | 125 krad | 0.0341 | 0.0371 | 8.80 |
| 11817 | 125 krad | 0.0334 | 0.0361 | 8.08 |

Table. 7. Pre-irradiation and Post-irradiation I_{PP_PLL}

| DUT | Total Dose | Pre-irradiation (A) | Post-irradiation (A) | Increase (%) |
|-------|------------|---------------------|----------------------|--------------|
| 11675 | 125 krad | 0.0153 | 0.0153 | 0.00 |
| 11677 | 125 krad | 0.0152 | 0.0153 | 0.66 |
| 11684 | 125 krad | 0.0153 | 0.0167 | 9.15 |
| 11744 | 125 krad | 0.0154 | 0.0158 | 2.60 |
| 11772 | 125 krad | 0.0153 | 0.0157 | 2.61 |
| 11817 | 125 krad | 0.0153 | 0.0163 | 6.54 |

The following figures (2-25) show the in-beam monitoring of the currents mentioned above as a function of TID for the available DUTs.

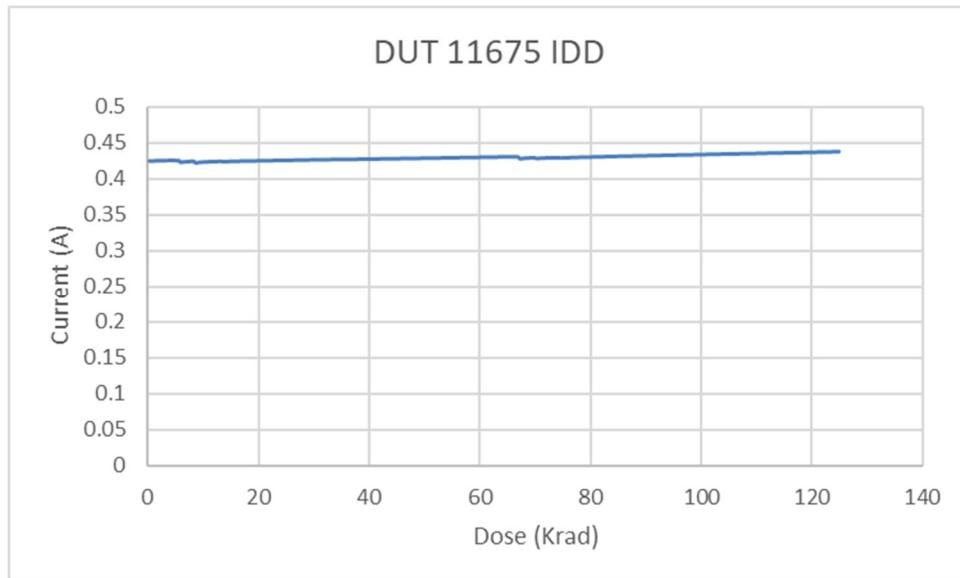


Fig. 2. DUT 11675 core power supply current (I_{DD}) versus TID

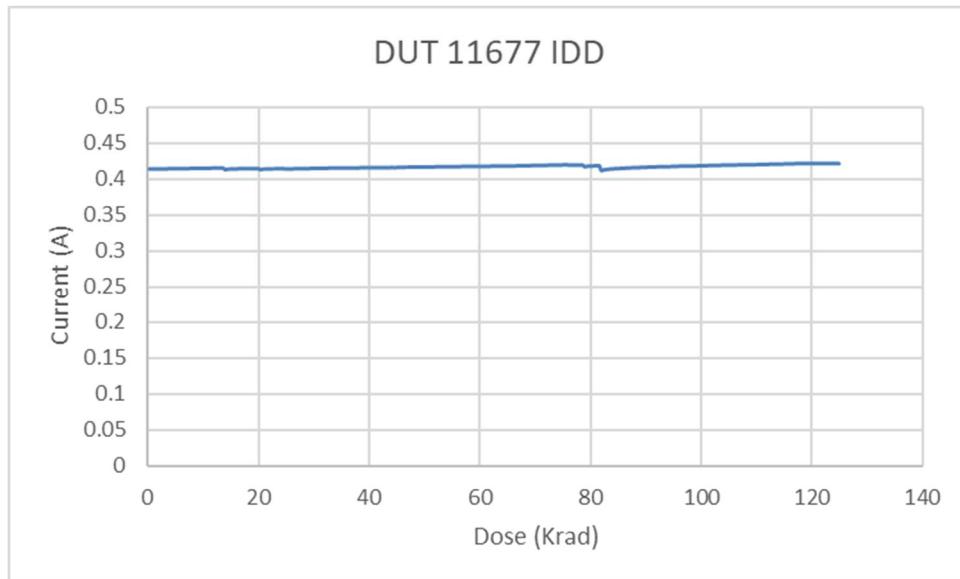


Fig. 3. DUT 11677 core power supply current (I_{DD}) versus TID

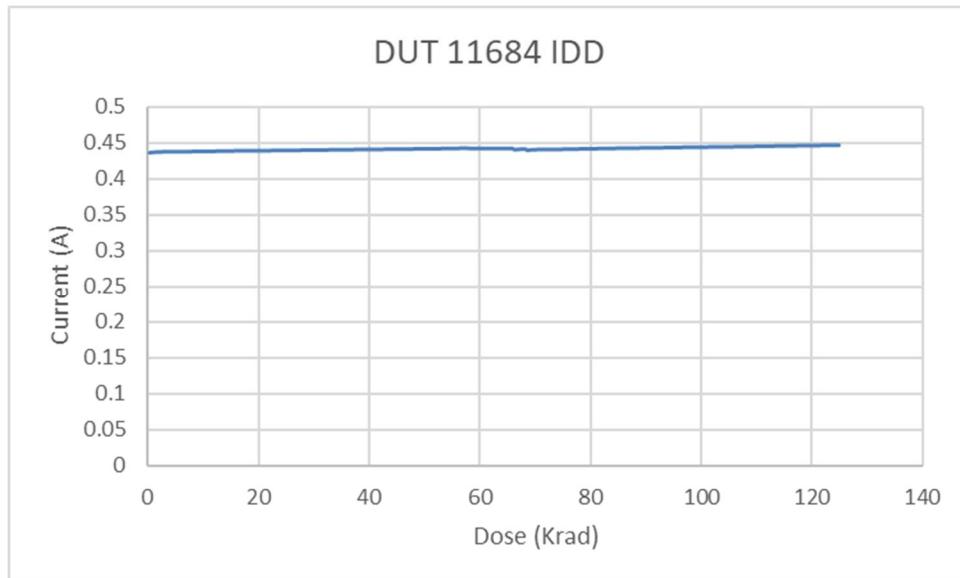


Fig. 4. DUT 11684 core power supply current (I_{DD}) versus TID

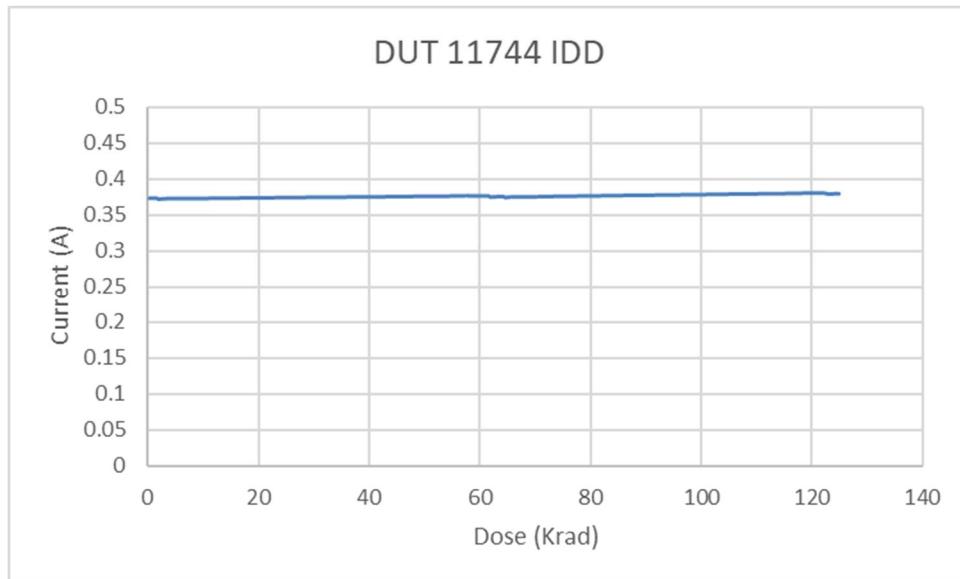


Fig. 5. DUT 11744 core power supply current (I_{DD}) versus TID

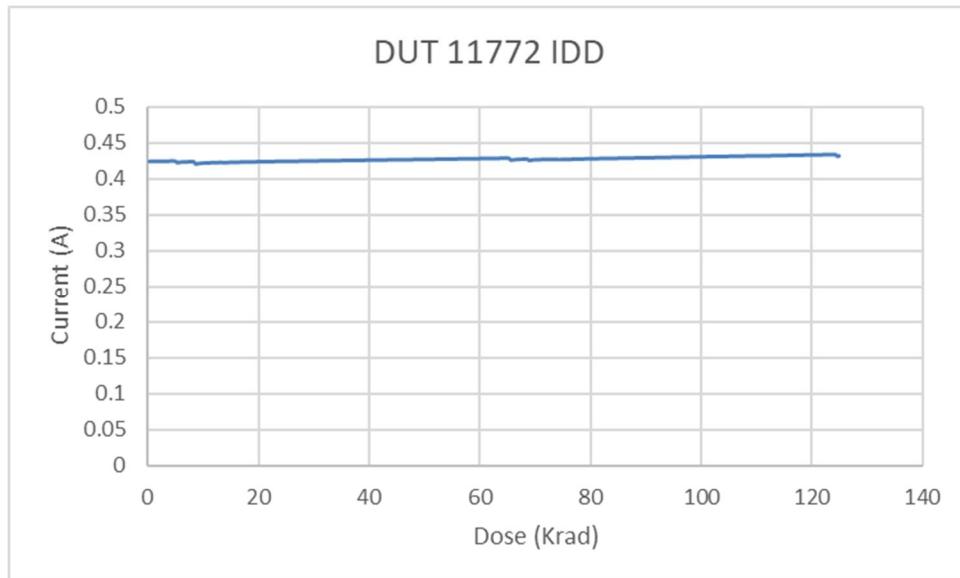


Fig. 6. DUT 11772 core power supply current (I_{DD}) versus TID

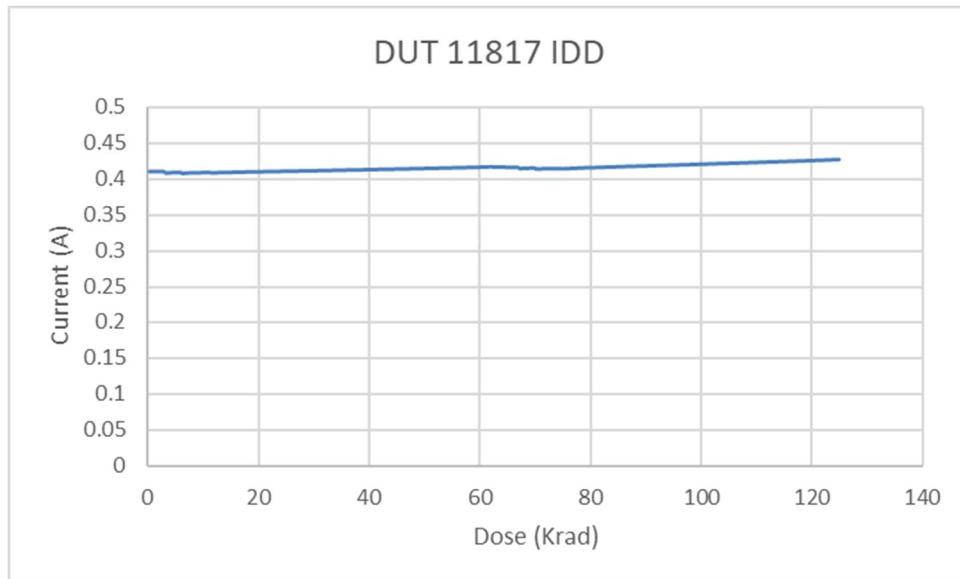


Fig. 7. DUT 11817 core power supply current (I_{DD}) versus TID

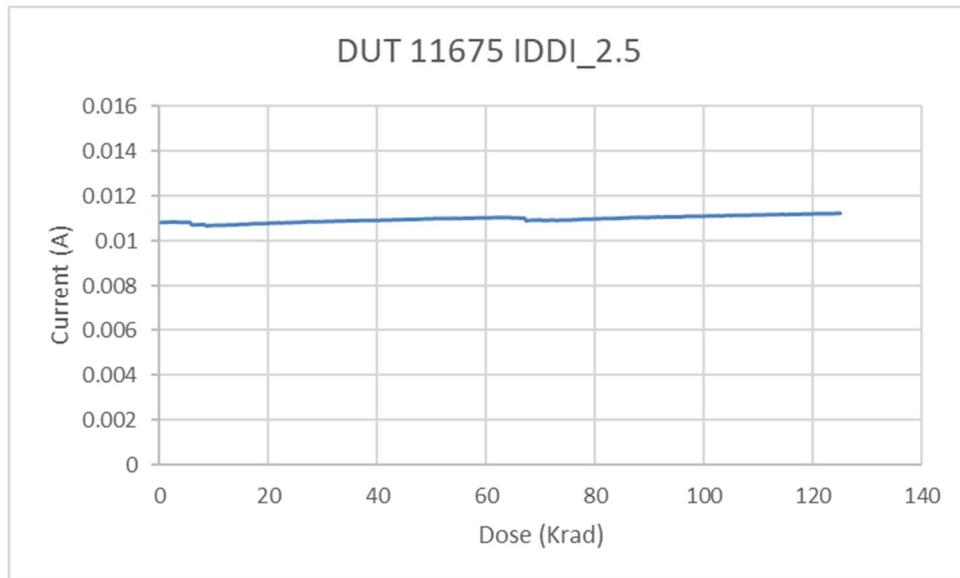


Fig. 8. DUT 11675 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

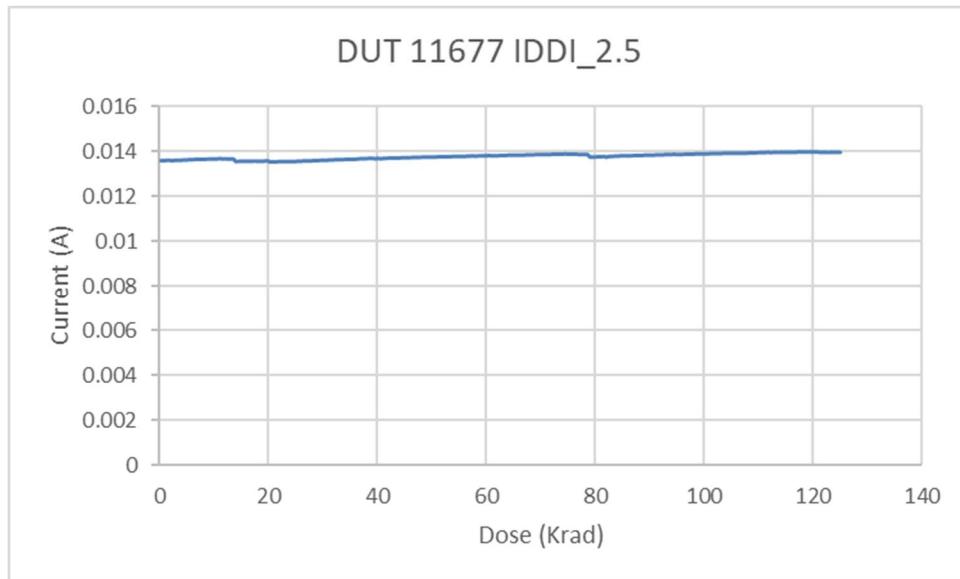


Fig. 9. DUT 11677 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

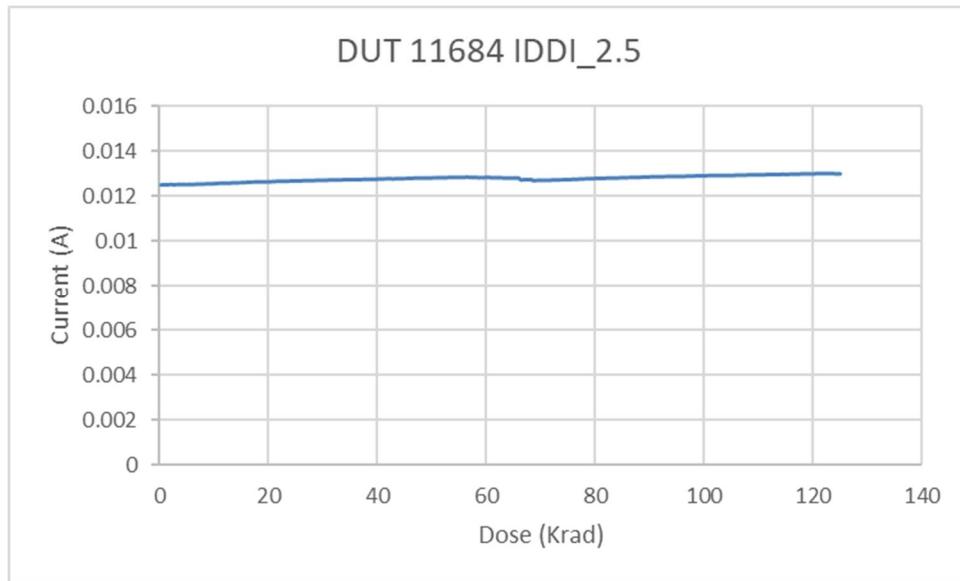


Fig. 10. DUT 11684 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

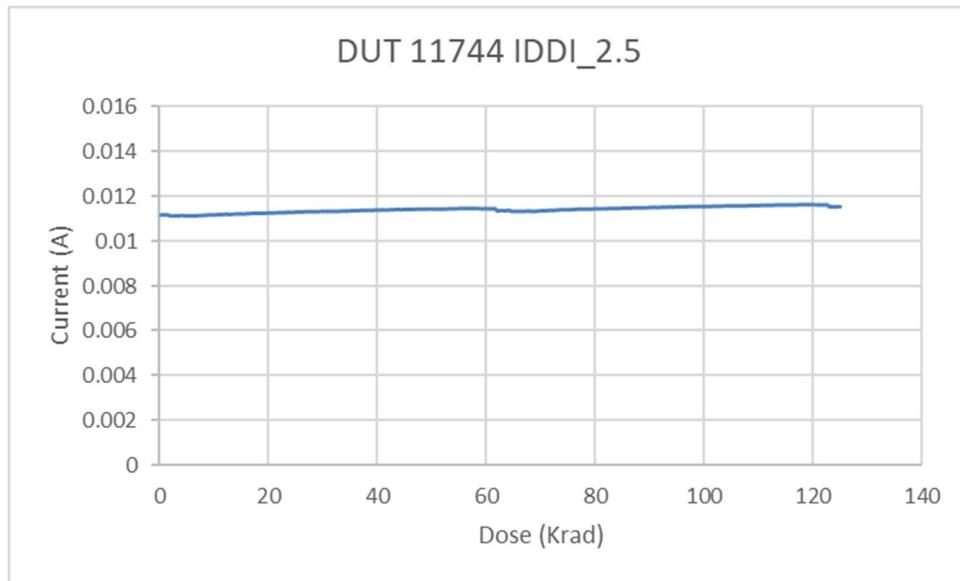


Fig. 11. DUT 11744 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

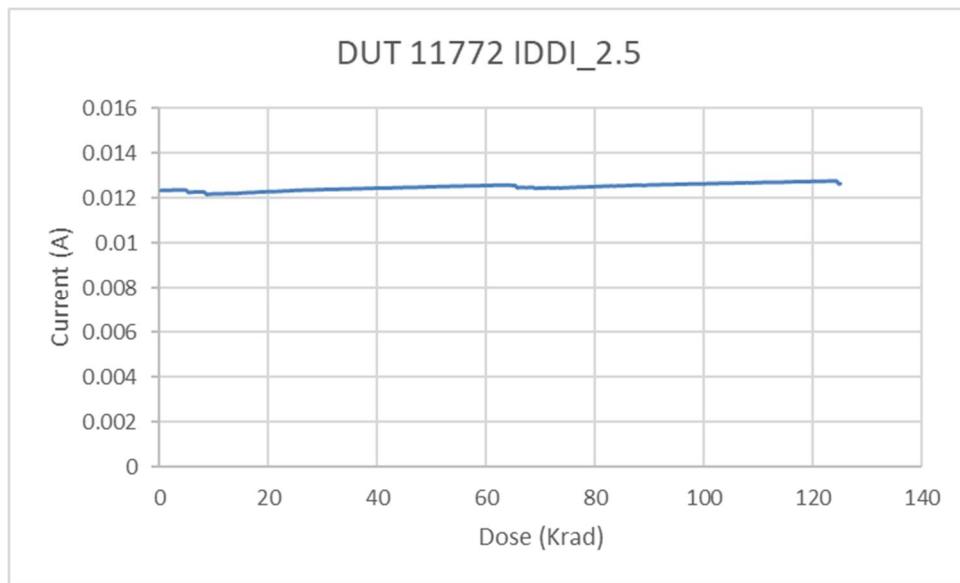


Fig. 12. DUT 11772 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

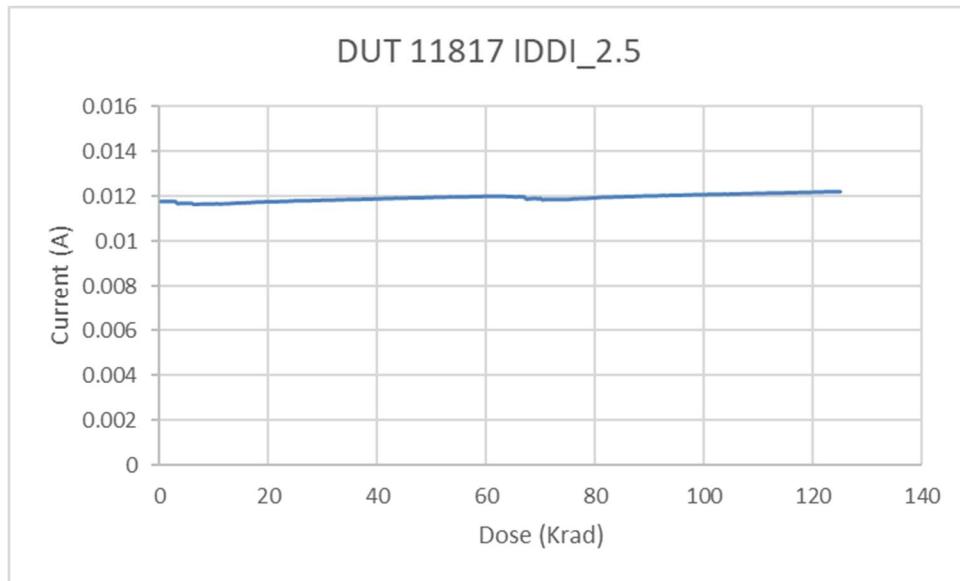


Fig. 13. DUT 11817 I/O bank 2.5V power supply current ($I_{DDI_2.5}$) versus TID

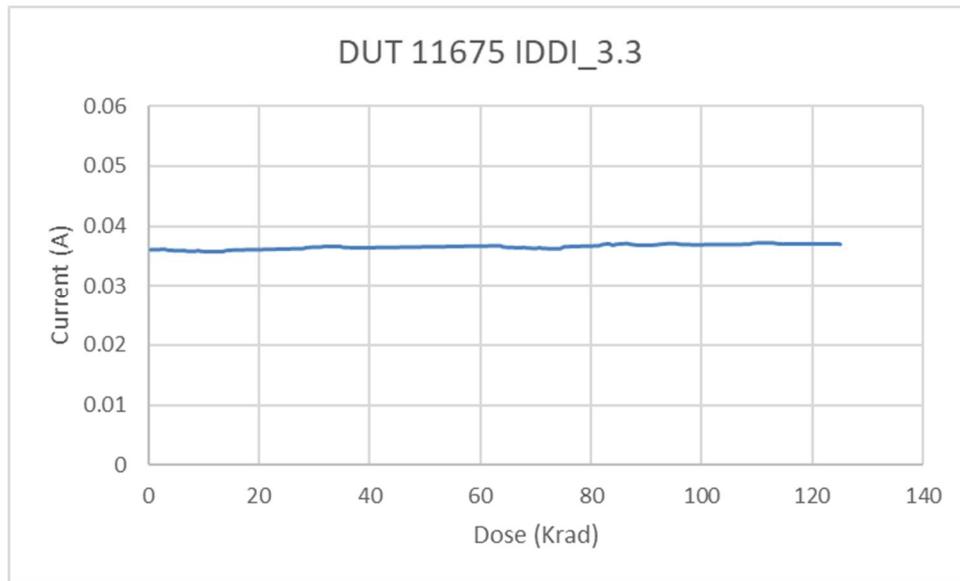


Fig. 14. DUT 11675 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

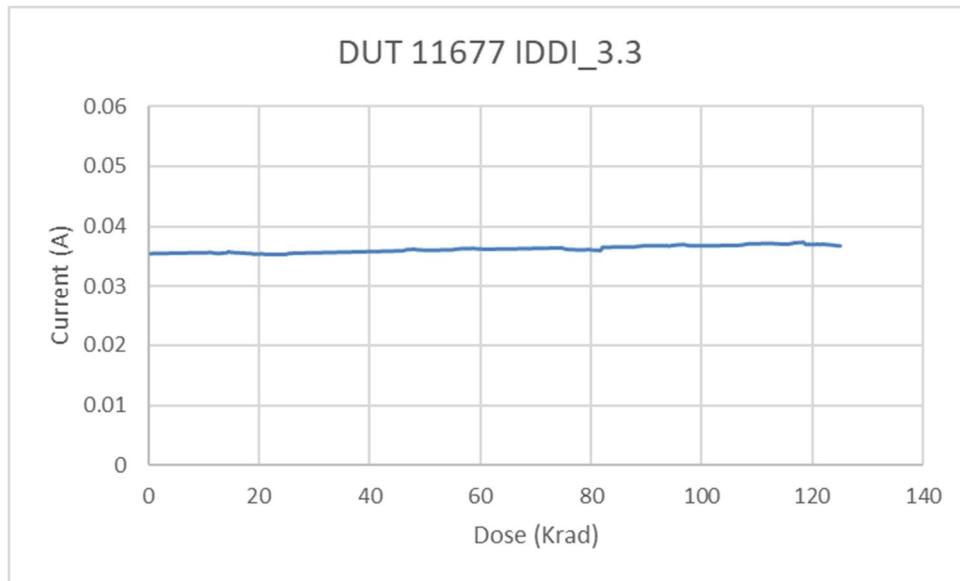


Fig. 15. DUT 11677 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

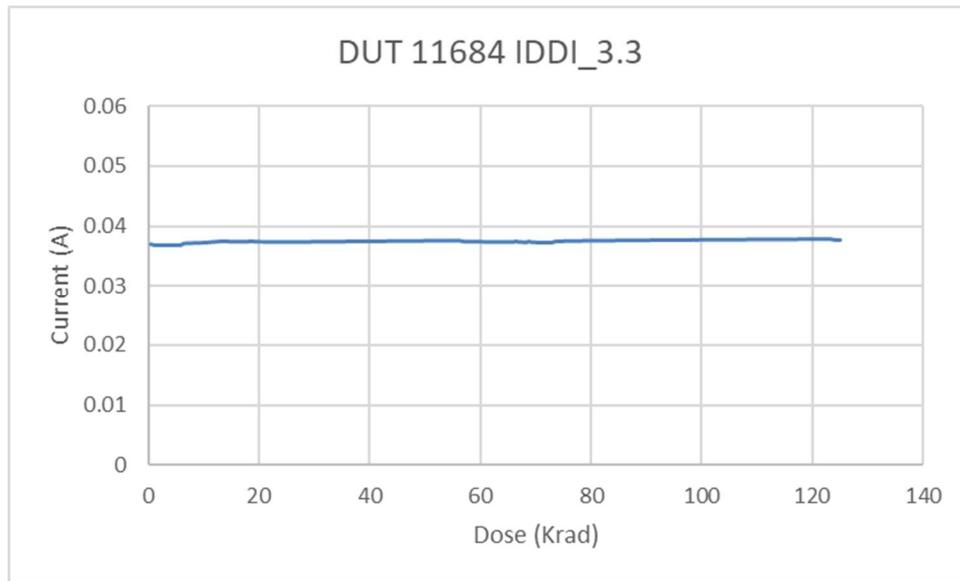


Fig. 16. DUT 11684 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

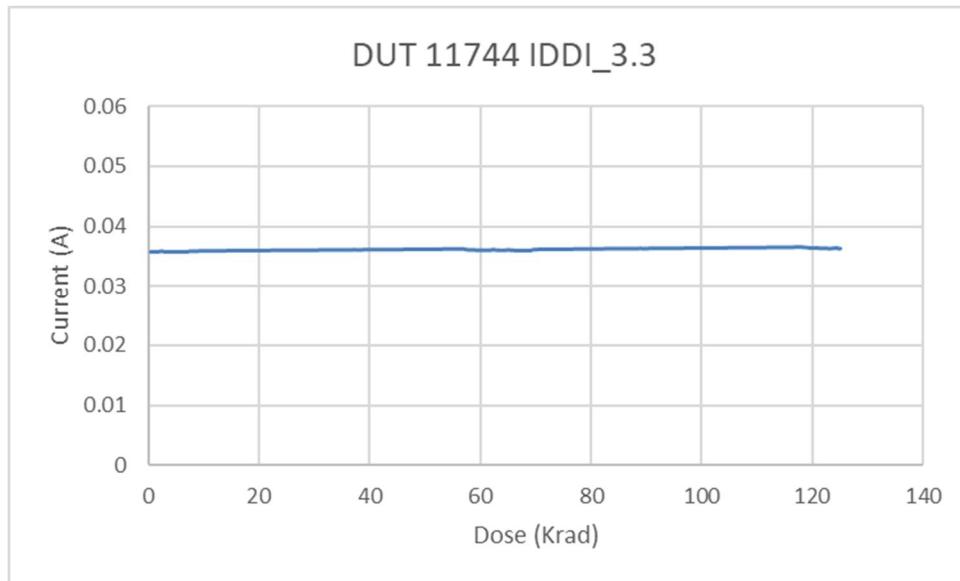


Fig. 17. DUT 11744 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

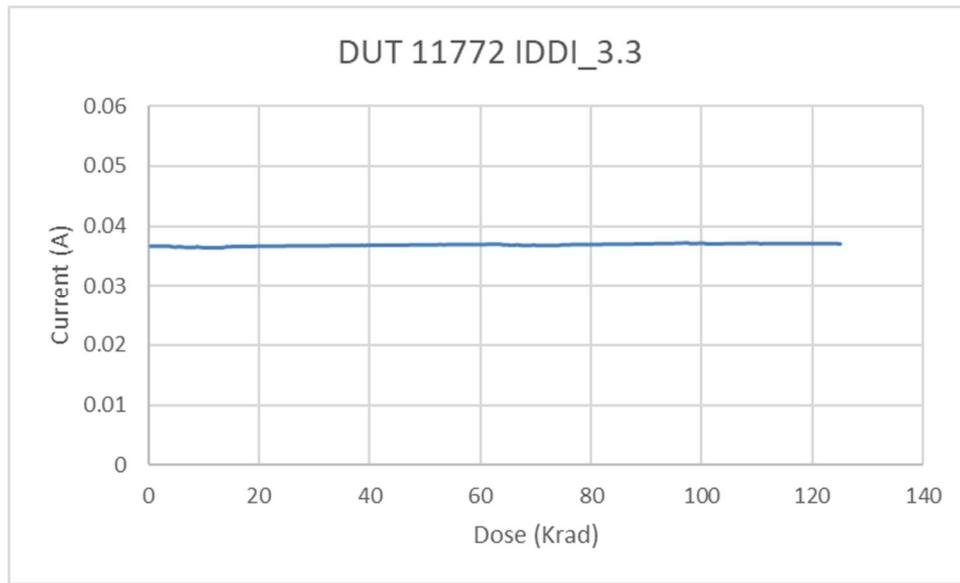


Fig. 18. DUT 11772 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

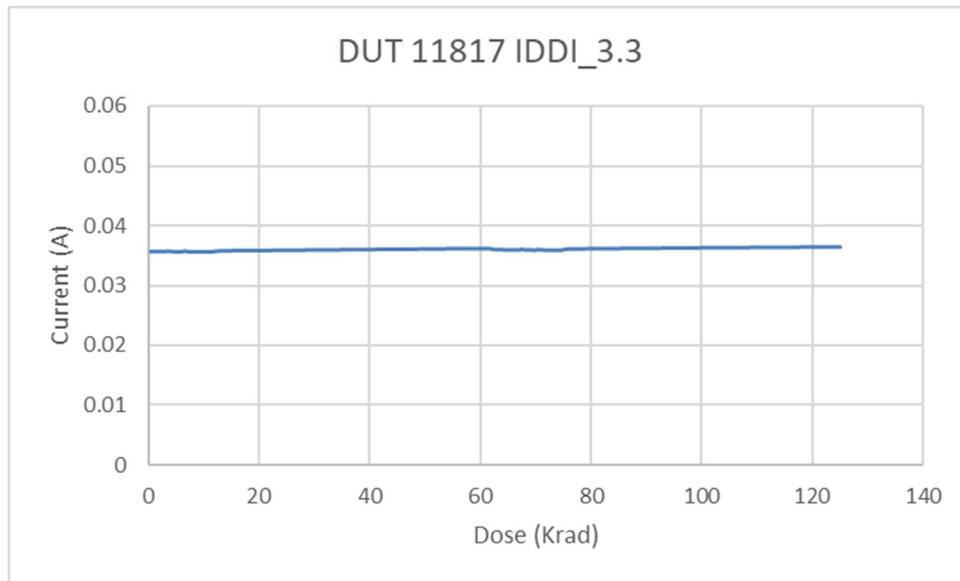


Fig. 19. DUT 11817 I/O bank 3.3V power supply current ($I_{DDI_3.3}$) versus TID

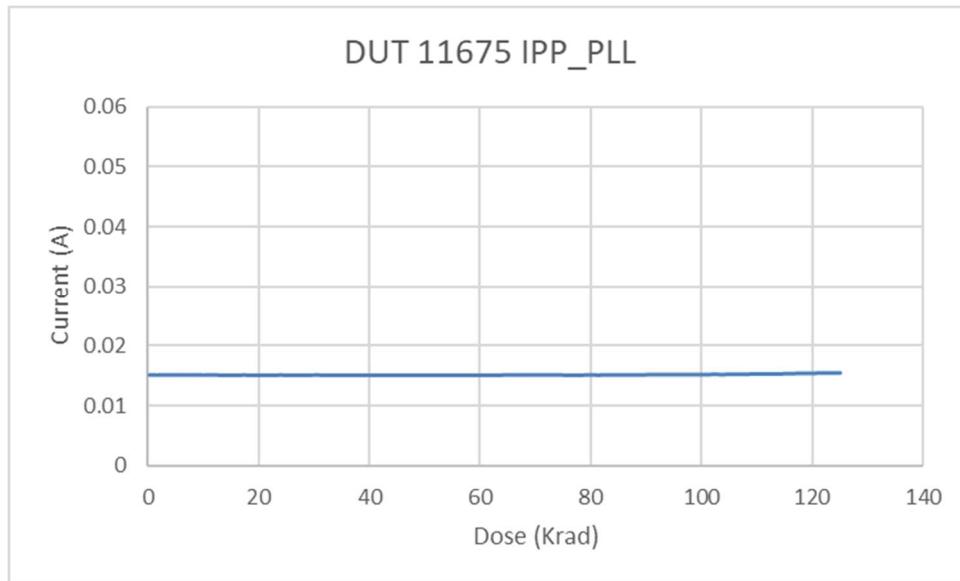


Fig. 20. DUT 11675 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

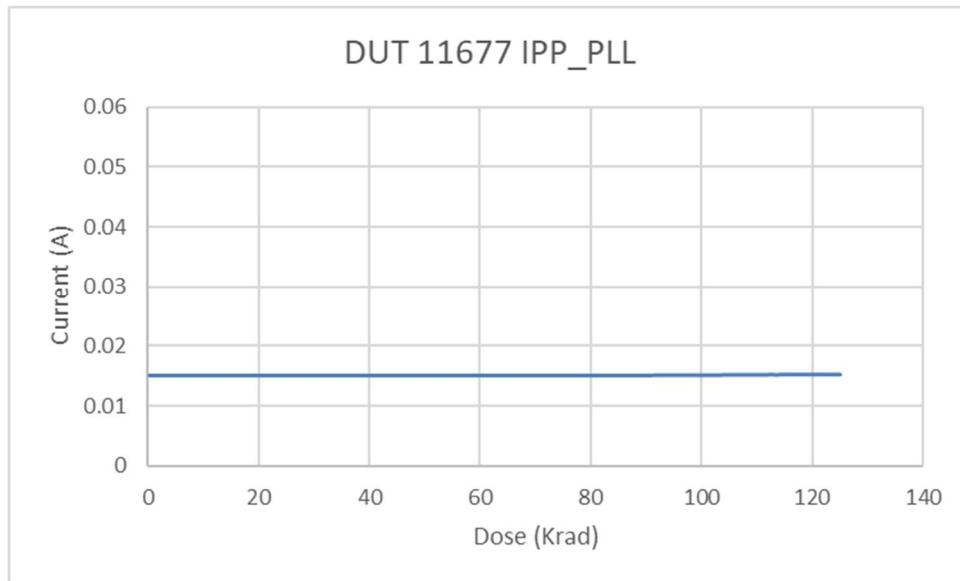


Fig. 21. DUT 11677 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

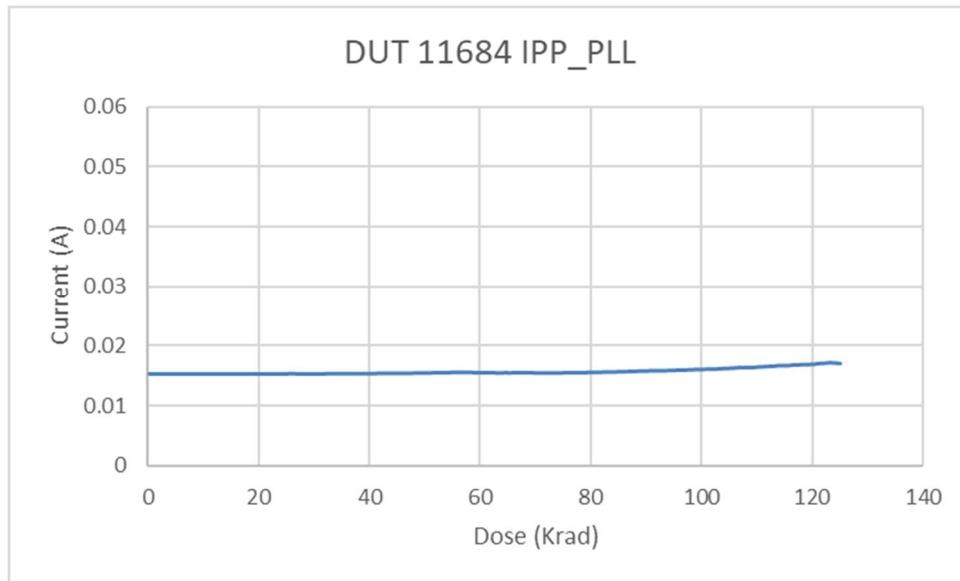


Fig. 22. DUT 11684 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

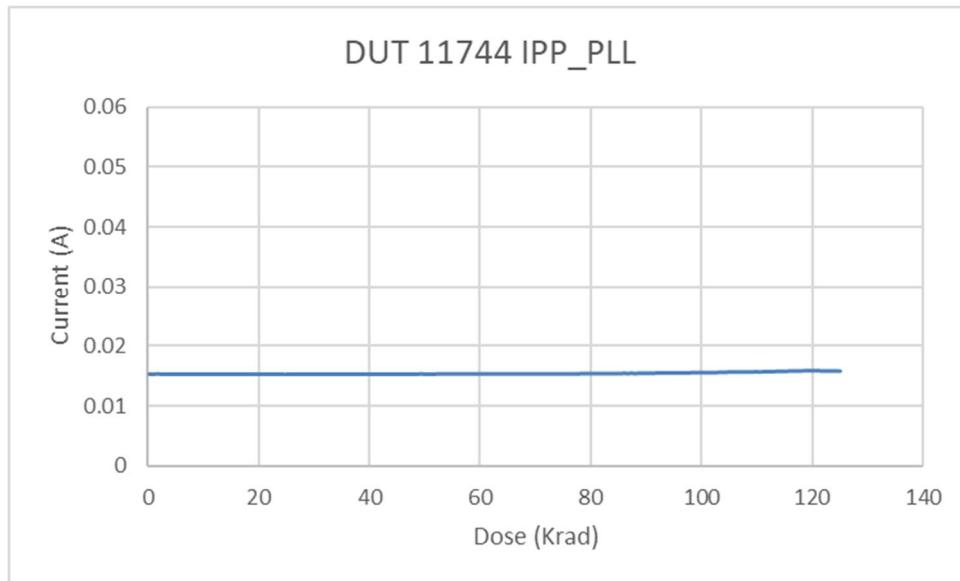


Fig. 23. DUT 11744 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

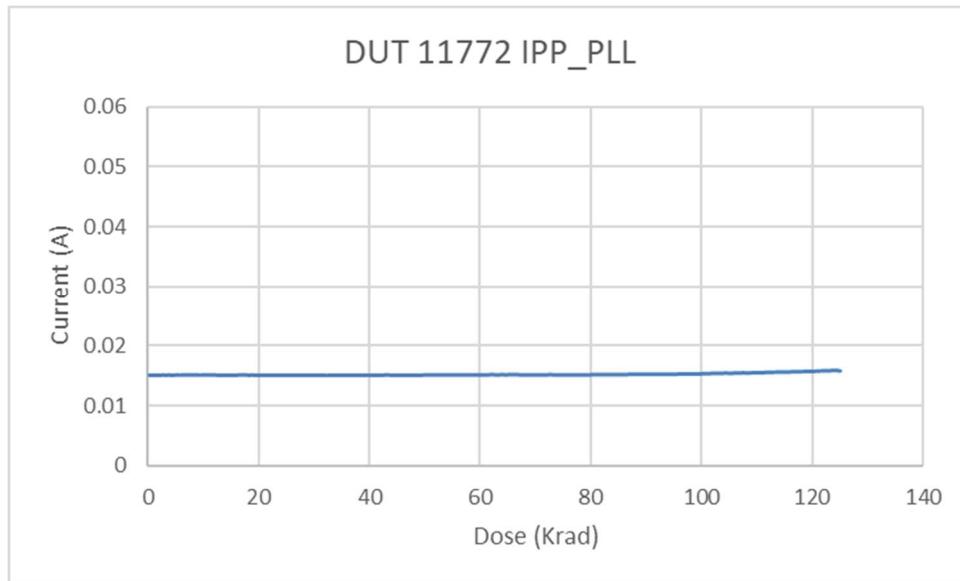


Fig. 24. DUT 11772 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

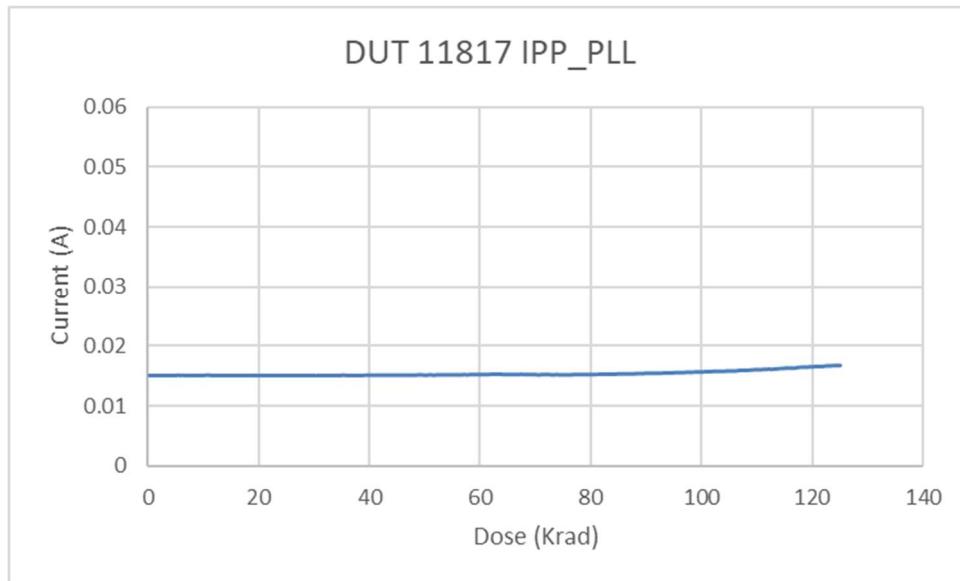


Fig. 25. DUT 11817 charge pump and PLL power supply current (I_{PP_PLL}) versus TID

C. Single-Ended Input Logic Threshold (VIL/VIH)

The input switching threshold, or trip point, is defined as the applied input voltage at which the output of the design starts to switch. VIH is the input trip point when the input is going high to low and VIL is the input trip point when the input is going low to high. The input logic threshold (VIL/VIH) is measured on all single-ended inputs as well as all differential input and recorded as pass or fail. All I/Os are tested at their respective I/O standards and are compliant to the JEDEC specs. Refer to http://www.microsemi.com/document-portal/doc_view/135193-ds0131-rtg4-fpga-datasheet for more information.

The 3 DUTs tested passed with respect to the testing specification pre and post-irradiation. This pass/fail is determined as part of the ATE test program used to perform pre and post-irradiation electrical parametric measurements.

Table. 8. VIH Summary

| DUT | Pre-irradiation | Post-irradiation |
|-------|-----------------|------------------|
| 11675 | Passed | Passed |
| 11677 | Passed | Passed |
| 11684 | Passed | Passed |
| 11744 | Passed | Passed |
| 11772 | Passed | Passed |
| 11817 | Passed | Passed |

Table. 9. VIL Summary

| DUT | Pre-irradiation | Post-irradiation |
|-------|-----------------|------------------|
| 11675 | Passed | Passed |
| 11677 | Passed | Passed |
| 11684 | Passed | Passed |
| 11744 | Passed | Passed |
| 11772 | Passed | Passed |
| 11817 | Passed | Passed |

D. Output-Drive Voltage (VOL/VOH)

The pre-irradiation and post-irradiation output-drive voltages (VOL/VOH) are performed on all available IOs. The measurements performed pre and post irradiation are within the specification limits; in each case, the radiation-induced degradation is within 10%. For the purpose of this report, the measurements presented below in tables 10 through 33 are sampled on several pins used in the burn in design.

Table. 10. LVC MOS 25 VOH – DUT 11675

| Pin Name | Pin# | 2mA | 4mA | 6mA | 8mA | 12mA | 14mA |
|-------------|------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad | Pre-rad | Post-rad | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.134 | 2.129 | 2.204 | 2.197 | 2.175 | 2.166 |
| EPCSRST_N_0 | B31 | 2.135 | 2.130 | 2.204 | 2.197 | 2.175 | 2.167 |
| EPCSRST_N_1 | B32 | 2.135 | 2.130 | 2.204 | 2.198 | 2.175 | 2.168 |
| EPCSRST_N_2 | B34 | 2.134 | 2.127 | 2.203 | 2.193 | 2.174 | 2.160 |
| EPCSRST_N_3 | B35 | 2.135 | 2.131 | 2.204 | 2.200 | 2.176 | 2.170 |
| EPCSRST_N_4 | B36 | 2.134 | 2.130 | 2.202 | 2.198 | 2.172 | 2.168 |
| EPCSRST_N_5 | B37 | 2.134 | 2.131 | 2.203 | 2.199 | 2.174 | 2.169 |
| MONITOR | K23 | 2.135 | 2.131 | 2.204 | 2.199 | 2.176 | 2.169 |
| PLL_MON | L20 | 2.136 | 2.134 | 2.207 | 2.205 | 2.180 | 2.178 |
| TOGGLE_MON | L22 | 2.136 | 2.133 | 2.207 | 2.203 | 2.180 | 2.176 |
| | | | | | | 2.156 | 2.149 |
| | | | | | | 2.125 | 2.117 |
| | | | | | | 2.112 | 2.111 |
| | | | | | | 2.111 | 2.094 |
| | | | | | | 2.110 | 2.110 |
| | | | | | | 2.110 | 2.095 |
| | | | | | | 2.111 | 2.096 |
| | | | | | | 2.111 | 2.097 |
| | | | | | | 2.112 | 2.103 |
| | | | | | | 2.112 | 2.103 |
| | | | | | | 2.114 | 2.106 |
| | | | | | | 2.114 | 2.100 |
| | | | | | | 2.113 | 2.112 |
| | | | | | | 2.112 | 2.098 |
| | | | | | | 2.117 | 2.118 |
| | | | | | | 2.112 | 2.118 |
| | | | | | | 2.126 | 2.120 |
| | | | | | | 2.126 | 2.117 |
| | | | | | | 2.112 | 2.103 |
| | | | | | | 2.111 | 2.097 |
| | | | | | | 2.111 | 2.095 |
| | | | | | | 2.110 | 2.095 |
| | | | | | | 2.113 | 2.098 |
| | | | | | | 2.113 | 2.098 |
| | | | | | | 2.126 | 2.122 |
| | | | | | | 2.126 | 2.121 |
| | | | | | | 2.119 | 2.113 |
| | | | | | | 2.113 | 2.106 |
| | | | | | | 2.111 | 2.096 |
| | | | | | | 2.111 | 2.096 |
| | | | | | | 2.122 | 2.116 |
| | | | | | | 2.122 | 2.109 |
| | | | | | | 2.116 | 2.102 |
| | | | | | | 2.111 | 2.093 |
| | | | | | | 2.125 | 2.108 |
| | | | | | | 2.125 | 2.112 |
| | | | | | | 2.128 | 2.121 |
| | | | | | | 2.121 | 2.116 |

Table. 11. LVC MOS 25 VOH – DUT 11677

| Pin Name | Pin# | 2mA | 4mA | 6mA | 8mA | 12mA | 14mA |
|-------------|------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad | Pre-rad | Post-rad | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.135 | 2.130 | 2.204 | 2.197 | 2.176 | 2.167 |
| EPCSRST_N_0 | B31 | 2.136 | 2.131 | 2.204 | 2.197 | 2.176 | 2.167 |
| EPCSRST_N_1 | B32 | 2.136 | 2.131 | 2.205 | 2.199 | 2.177 | 2.169 |
| EPCSRST_N_2 | B34 | 2.135 | 2.128 | 2.203 | 2.193 | 2.174 | 2.160 |
| EPCSRST_N_3 | B35 | 2.136 | 2.132 | 2.205 | 2.201 | 2.177 | 2.172 |
| EPCSRST_N_4 | B36 | 2.135 | 2.131 | 2.202 | 2.198 | 2.172 | 2.168 |
| EPCSRST_N_5 | B37 | 2.136 | 2.132 | 2.204 | 2.200 | 2.175 | 2.171 |
| MONITOR | K23 | 2.136 | 2.131 | 2.205 | 2.198 | 2.176 | 2.167 |
| PLL_MON | L20 | 2.138 | 2.135 | 2.208 | 2.206 | 2.182 | 2.179 |
| TOGGLE_MON | L22 | 2.138 | 2.135 | 2.208 | 2.205 | 2.181 | 2.177 |
| | | | | | | 2.162 | 2.158 |
| | | | | | | 2.133 | 2.128 |
| | | | | | | 2.128 | 2.121 |

Table. 12. LVC MOS 25 VOH – DUT 11684

| Pin Name | Pin# | 2mA | 4mA | 6mA | 8mA | 12mA | 14mA |
|-------------|------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad | Pre-rad | Post-rad | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.135 | 2.130 | 2.204 | 2.197 | 2.176 | 2.167 |
| EPCSRST_N_0 | B31 | 2.136 | 2.131 | 2.204 | 2.197 | 2.176 | 2.167 |
| EPCSRST_N_1 | B32 | 2.136 | 2.131 | 2.205 | 2.199 | 2.177 | 2.169 |
| EPCSRST_N_2 | B34 | 2.134 | 2.127 | 2.203 | 2.192 | 2.175 | 2.159 |
| EPCSRST_N_3 | B35 | 2.135 | 2.131 | 2.204 | 2.200 | 2.176 | 2.172 |
| EPCSRST_N_4 | B36 | 2.134 | 2.130 | 2.202 | 2.198 | 2.172 | 2.168 |
| EPCSRST_N_5 | B37 | 2.135 | 2.131 | 2.203 | 2.199 | 2.174 | 2.170 |
| MONITOR | K23 | 2.136 | 2.131 | 2.205 | 2.199 | 2.176 | 2.169 |
| PLL_MON | L20 | 2.138 | 2.135 | 2.208 | 2.206 | 2.182 | 2.179 |
| TOGGLE_MON | L22 | 2.136 | 2.134 | 2.207 | 2.205 | 2.180 | 2.178 |
| | | | | | | 2.161 | 2.158 |
| | | | | | | 2.132 | 2.129 |
| | | | | | | 2.129 | 2.120 |

Table. 13. LVC MOS 25 VOH – DUT 11744

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.133 | 2.128 | 2.203 | 2.196 | 2.174 | 2.166 | 2.155 | 2.145 | 2.123 | 2.109 | 2.109 | 2.094 |
| EPCSRST_N_0 | B31 | 2.134 | 2.130 | 2.203 | 2.196 | 2.174 | 2.165 | 2.155 | 2.144 | 2.122 | 2.107 | 2.108 | 2.091 |
| EPCSRST_N_1 | B32 | 2.134 | 2.129 | 2.204 | 2.197 | 2.175 | 2.167 | 2.155 | 2.144 | 2.124 | 2.109 | 2.111 | 2.094 |
| EPCSRST_N_2 | B34 | 2.132 | 2.125 | 2.202 | 2.191 | 2.173 | 2.158 | 2.152 | 2.132 | 2.120 | 2.091 | 2.107 | 2.074 |
| EPCSRST_N_3 | B35 | 2.133 | 2.130 | 2.203 | 2.200 | 2.175 | 2.171 | 2.155 | 2.150 | 2.123 | 2.118 | 2.110 | 2.104 |
| EPCSRST_N_4 | B36 | 2.132 | 2.128 | 2.200 | 2.197 | 2.171 | 2.167 | 2.149 | 2.144 | 2.115 | 2.110 | 2.101 | 2.095 |
| EPCSRST_N_5 | B37 | 2.133 | 2.129 | 2.202 | 2.198 | 2.172 | 2.169 | 2.152 | 2.147 | 2.119 | 2.113 | 2.105 | 2.099 |
| MONITOR | K23 | 2.134 | 2.130 | 2.204 | 2.198 | 2.175 | 2.168 | 2.155 | 2.145 | 2.123 | 2.110 | 2.110 | 2.095 |
| PLL_MON | L20 | 2.136 | 2.134 | 2.207 | 2.204 | 2.180 | 2.178 | 2.162 | 2.158 | 2.134 | 2.130 | 2.122 | 2.118 |
| TOGGLE_MON | L22 | 2.135 | 2.133 | 2.206 | 2.204 | 2.179 | 2.176 | 2.160 | 2.157 | 2.131 | 2.127 | 2.119 | 2.115 |

Table. 14. LVC MOS 25 VOH – DUT 11772

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.135 | 2.130 | 2.204 | 2.198 | 2.175 | 2.168 | 2.156 | 2.147 | 2.124 | 2.111 | 2.110 | 2.096 |
| EPCSRST_N_0 | B31 | 2.137 | 2.132 | 2.205 | 2.198 | 2.176 | 2.168 | 2.157 | 2.147 | 2.125 | 2.110 | 2.112 | 2.095 |
| EPCSRST_N_1 | B32 | 2.136 | 2.131 | 2.205 | 2.198 | 2.177 | 2.167 | 2.156 | 2.144 | 2.125 | 2.108 | 2.112 | 2.093 |
| EPCSRST_N_2 | B34 | 2.135 | 2.128 | 2.203 | 2.192 | 2.175 | 2.159 | 2.154 | 2.134 | 2.121 | 2.093 | 2.108 | 2.075 |
| EPCSRST_N_3 | B35 | 2.136 | 2.132 | 2.205 | 2.201 | 2.177 | 2.172 | 2.157 | 2.151 | 2.126 | 2.119 | 2.113 | 2.106 |
| EPCSRST_N_4 | B36 | 2.135 | 2.131 | 2.202 | 2.199 | 2.173 | 2.169 | 2.152 | 2.147 | 2.118 | 2.113 | 2.104 | 2.099 |
| EPCSRST_N_5 | B37 | 2.135 | 2.132 | 2.203 | 2.200 | 2.174 | 2.171 | 2.154 | 2.149 | 2.122 | 2.115 | 2.108 | 2.101 |
| MONITOR | K23 | 2.136 | 2.132 | 2.205 | 2.200 | 2.177 | 2.170 | 2.158 | 2.147 | 2.127 | 2.113 | 2.114 | 2.098 |
| PLL_MON | L20 | 2.138 | 2.136 | 2.208 | 2.206 | 2.182 | 2.179 | 2.164 | 2.160 | 2.136 | 2.132 | 2.124 | 2.120 |
| TOGGLE_MON | L22 | 2.137 | 2.135 | 2.208 | 2.205 | 2.181 | 2.178 | 2.162 | 2.159 | 2.134 | 2.130 | 2.122 | 2.118 |

Table. 15. LVC MOS 25 VOH – DUT 11817

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.135 | 2.129 | 2.204 | 2.197 | 2.175 | 2.167 | 2.156 | 2.146 | 2.124 | 2.110 | 2.111 | 2.095 |
| EPCSRST_N_0 | B31 | 2.136 | 2.131 | 2.205 | 2.197 | 2.176 | 2.167 | 2.157 | 2.146 | 2.124 | 2.110 | 2.111 | 2.094 |
| EPCSRST_N_1 | B32 | 2.137 | 2.132 | 2.205 | 2.199 | 2.177 | 2.170 | 2.157 | 2.147 | 2.126 | 2.113 | 2.113 | 2.099 |
| EPCSRST_N_2 | B34 | 2.135 | 2.127 | 2.203 | 2.193 | 2.174 | 2.160 | 2.153 | 2.135 | 2.121 | 2.096 | 2.107 | 2.079 |
| EPCSRST_N_3 | B35 | 2.136 | 2.132 | 2.205 | 2.201 | 2.177 | 2.173 | 2.157 | 2.151 | 2.126 | 2.120 | 2.113 | 2.106 |
| EPCSRST_N_4 | B36 | 2.134 | 2.130 | 2.202 | 2.198 | 2.172 | 2.168 | 2.150 | 2.145 | 2.116 | 2.110 | 2.102 | 2.096 |
| EPCSRST_N_5 | B37 | 2.135 | 2.131 | 2.203 | 2.199 | 2.175 | 2.170 | 2.154 | 2.148 | 2.122 | 2.115 | 2.108 | 2.101 |
| MONITOR | K23 | 2.136 | 2.131 | 2.205 | 2.199 | 2.177 | 2.170 | 2.157 | 2.147 | 2.126 | 2.113 | 2.112 | 2.098 |
| PLL_MON | L20 | 2.138 | 2.135 | 2.209 | 2.206 | 2.182 | 2.179 | 2.164 | 2.159 | 2.136 | 2.131 | 2.124 | 2.119 |
| TOGGLE_MON | L22 | 2.138 | 2.135 | 2.208 | 2.205 | 2.181 | 2.178 | 2.162 | 2.158 | 2.134 | 2.129 | 2.122 | 2.117 |

Table. 16. LVC MOS 25 VOL – DUT 11675

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 234.4 | 235.3 | 166.8 | 169.9 | 194.5 | 199.4 | 216.7 | 223.3 | 247.2 | 257.3 | 260.1 | 272.3 |
| EPCSRST_N_0 | B31 | 233.6 | 234.6 | 166.6 | 169.8 | 194.5 | 199.4 | 216.8 | 223.2 | 247.7 | 257.6 | 260.7 | 272.6 |
| EPCSRST_N_1 | B32 | 233.3 | 233.9 | 165.9 | 168.5 | 193.3 | 197.6 | 213.8 | 218.9 | 244.5 | 252.9 | 257.8 | 267.7 |
| EPCSRST_N_2 | B34 | 234.8 | 237.3 | 167.5 | 173.8 | 195.7 | 205.3 | 216.4 | 228.9 | 248.2 | 267.5 | 261.9 | 284.7 |
| EPCSRST_N_3 | B35 | 233.8 | 233.8 | 166.1 | 167.1 | 193.4 | 195.4 | 213.6 | 215.8 | 244.0 | 247.9 | 257.1 | 261.6 |
| EPCSRST_N_4 | B36 | 235.1 | 234.7 | 168.6 | 168.9 | 197.3 | 197.8 | 218.6 | 219.0 | 251.2 | 252.6 | 265.4 | 267.1 |
| EPCSRST_N_5 | B37 | 234.8 | 234.2 | 167.6 | 168.0 | 196.0 | 196.7 | 216.8 | 217.6 | 248.7 | 250.3 | 262.4 | 264.5 |
| MONITOR | K23 | 234.0 | 234.6 | 166.4 | 169.0 | 193.7 | 198.1 | 214.0 | 219.6 | 244.1 | 253.2 | 257.0 | 267.8 |
| PLL_MON | L20 | 232.1 | 231.7 | 163.0 | 163.3 | 189.1 | 189.5 | 208.0 | 208.0 | 235.2 | 235.7 | 246.4 | 247.4 |
| TOGGLE_MON | L22 | 232.6 | 232.3 | 163.8 | 164.5 | 190.0 | 191.3 | 209.1 | 210.3 | 237.1 | 239.5 | 248.7 | 251.9 |

Table. 17. LVC MOS 25 VOL – DUT 11677

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 233.6 | 234.6 | 166.2 | 169.3 | 193.8 | 198.7 | 216.0 | 222.5 | 246.6 | 256.5 | 259.6 | 271.6 |
| EPCSRST_N_0 | B31 | 232.2 | 233.2 | 165.9 | 169.2 | 193.9 | 198.9 | 216.4 | 222.8 | 247.3 | 257.3 | 260.4 | 272.6 |
| EPCSRST_N_1 | B32 | 231.7 | 232.5 | 164.7 | 167.6 | 192.1 | 196.4 | 212.0 | 217.6 | 242.6 | 251.4 | 255.7 | 266.3 |
| EPCSRST_N_2 | B34 | 233.3 | 236.3 | 166.8 | 174.0 | 194.9 | 206.0 | 215.6 | 230.0 | 247.5 | 269.6 | 261.3 | 287.1 |
| EPCSRST_N_3 | B35 | 232.8 | 232.4 | 165.3 | 165.7 | 192.7 | 193.6 | 212.6 | 213.8 | 243.0 | 245.0 | 255.9 | 258.4 |
| EPCSRST_N_4 | B36 | 234.1 | 233.6 | 168.4 | 168.7 | 197.3 | 197.9 | 218.7 | 219.3 | 251.8 | 253.3 | 266.3 | 268.0 |
| EPCSRST_N_5 | B37 | 233.0 | 232.6 | 166.5 | 166.9 | 194.6 | 195.2 | 215.1 | 215.8 | 246.5 | 248.2 | 260.1 | 262.3 |
| MONITOR | K23 | 232.9 | 234.1 | 165.9 | 169.9 | 193.3 | 199.7 | 213.7 | 222.0 | 244.1 | 257.5 | 257.3 | 273.0 |
| PLL_MON | L20 | 230.8 | 230.4 | 162.2 | 162.4 | 188.0 | 188.5 | 206.9 | 206.9 | 234.1 | 234.7 | 245.5 | 246.4 |
| TOGGLE_MON | L22 | 230.7 | 230.4 | 162.9 | 163.2 | 189.1 | 189.9 | 208.3 | 208.8 | 236.2 | 237.6 | 248.1 | 249.9 |

Table. 18. LVC MOS 25 VOL – DUT 11684

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 236.1 | 237.0 | 167.7 | 170.8 | 195.6 | 200.4 | 217.7 | 224.2 | 248.1 | 258.2 | 260.9 | 273.0 |
| EPCSRST_N_0 | B31 | 234.6 | 235.6 | 167.6 | 171.1 | 195.7 | 201.2 | 218.1 | 225.5 | 249.3 | 260.6 | 262.4 | 276.1 |
| EPCSRST_N_1 | B32 | 234.6 | 235.0 | 166.5 | 169.1 | 194.1 | 198.2 | 214.4 | 219.5 | 244.9 | 253.4 | 258.0 | 268.1 |
| EPCSRST_N_2 | B34 | 236.3 | 239.3 | 168.4 | 175.9 | 196.4 | 208.0 | 216.9 | 232.2 | 248.4 | 271.8 | 262.1 | 289.5 |
| EPCSRST_N_3 | B35 | 235.9 | 235.3 | 167.4 | 167.7 | 195.1 | 195.7 | 215.1 | 215.9 | 245.8 | 247.5 | 258.9 | 260.8 |
| EPCSRST_N_4 | B36 | 237.4 | 236.7 | 170.2 | 170.3 | 199.0 | 199.3 | 220.5 | 220.8 | 253.5 | 254.6 | 268.0 | 269.2 |
| EPCSRST_N_5 | B37 | 236.5 | 235.8 | 168.7 | 168.9 | 197.1 | 197.6 | 217.8 | 218.3 | 249.5 | 251.0 | 263.3 | 265.0 |
| MONITOR | K23 | 235.4 | 235.6 | 167.5 | 170.0 | 195.2 | 199.3 | 215.6 | 221.1 | 246.2 | 255.3 | 259.0 | 270.2 |
| PLL_MON | L20 | 233.1 | 232.4 | 163.5 | 163.9 | 189.5 | 190.1 | 208.5 | 208.6 | 235.7 | 236.6 | 246.8 | 248.1 |
| TOGGLE_MON | L22 | 234.5 | 233.5 | 165.0 | 164.6 | 191.5 | 191.0 | 211.0 | 210.0 | 239.6 | 238.6 | 251.3 | 250.5 |

Table. 19. LVC MOS 25 VOL – DUT 11744

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 236.1 | 236.6 | 168.0 | 170.8 | 195.9 | 200.5 | 218.1 | 224.4 | 249.0 | 258.6 | 261.7 | 273.4 |
| EPCSRST_N_0 | B31 | 235.0 | 236.0 | 168.0 | 171.3 | 196.3 | 201.6 | 218.7 | 226.1 | 250.1 | 261.3 | 263.2 | 276.9 |
| EPCSRST_N_1 | B32 | 234.8 | 235.4 | 166.7 | 170.0 | 194.4 | 199.4 | 214.6 | 221.0 | 245.2 | 255.6 | 258.4 | 270.7 |
| EPCSRST_N_2 | B34 | 237.0 | 239.9 | 168.8 | 176.3 | 196.8 | 208.4 | 217.4 | 232.8 | 249.0 | 272.7 | 262.6 | 290.4 |
| EPCSRST_N_3 | B35 | 236.4 | 235.5 | 167.7 | 167.6 | 195.6 | 195.6 | 215.8 | 215.8 | 246.4 | 247.3 | 259.5 | 260.7 |
| EPCSRST_N_4 | B36 | 237.7 | 236.8 | 170.5 | 170.4 | 199.4 | 199.6 | 220.8 | 220.9 | 253.9 | 254.9 | 268.4 | 269.7 |
| EPCSRST_N_5 | B37 | 236.8 | 236.0 | 169.0 | 169.1 | 197.3 | 197.9 | 218.1 | 218.7 | 250.0 | 251.5 | 263.7 | 265.6 |
| MONITOR | K23 | 236.1 | 236.1 | 167.7 | 170.3 | 195.4 | 199.8 | 216.0 | 221.9 | 246.7 | 256.5 | 259.7 | 271.5 |
| PLL_MON | L20 | 233.5 | 233.0 | 163.9 | 163.9 | 190.1 | 190.3 | 209.2 | 209.0 | 236.5 | 237.0 | 247.9 | 248.8 |
| TOGGLE_MON | L22 | 234.2 | 233.1 | 164.9 | 164.6 | 191.3 | 191.1 | 210.8 | 210.3 | 239.0 | 239.0 | 250.8 | 250.9 |

Table. 20. LVC MOS 25 VOL – DUT 11772

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 234.3 | 234.8 | 166.8 | 169.5 | 194.6 | 198.9 | 216.8 | 222.9 | 247.6 | 256.8 | 260.6 | 271.7 |
| EPCSRST_N_0 | B31 | 233.0 | 234.0 | 166.2 | 169.6 | 194.0 | 199.3 | 216.1 | 223.4 | 246.9 | 258.1 | 260.0 | 273.3 |
| EPCSRST_N_1 | B32 | 232.7 | 233.5 | 165.3 | 169.2 | 192.9 | 198.9 | 213.3 | 221.0 | 244.1 | 256.4 | 257.3 | 272.0 |
| EPCSRST_N_2 | B34 | 234.3 | 237.5 | 167.4 | 175.1 | 195.5 | 207.3 | 216.2 | 231.7 | 248.0 | 271.8 | 261.7 | 289.8 |
| EPCSRST_N_3 | B35 | 233.5 | 232.9 | 165.8 | 166.4 | 193.2 | 194.3 | 213.2 | 214.5 | 243.3 | 246.0 | 256.4 | 259.6 |
| EPCSRST_N_4 | B36 | 234.7 | 233.9 | 168.4 | 168.5 | 197.0 | 197.4 | 218.2 | 218.4 | 251.0 | 252.0 | 265.1 | 266.4 |
| EPCSRST_N_5 | B37 | 234.4 | 233.6 | 167.4 | 167.6 | 195.5 | 196.1 | 216.2 | 216.8 | 247.8 | 249.5 | 261.4 | 263.6 |
| MONITOR | K23 | 233.7 | 234.1 | 166.0 | 168.9 | 193.2 | 197.9 | 213.5 | 219.5 | 243.3 | 253.6 | 256.1 | 268.2 |
| PLL_MON | L20 | 231.3 | 230.7 | 162.7 | 162.8 | 188.4 | 188.9 | 207.4 | 207.5 | 234.6 | 235.3 | 245.9 | 247.0 |
| TOGGLE_MON | L22 | 232.0 | 231.1 | 163.4 | 163.2 | 189.6 | 189.4 | 208.8 | 208.3 | 236.8 | 236.7 | 248.4 | 248.5 |

Table. 21. LVC MOS 25 VOL – DUT 11817

| | | 2mA | | 4mA | | 6mA | | 8mA | | 12mA | | 14mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 235.0 | 236.2 | 167.2 | 170.4 | 195.0 | 200.0 | 217.2 | 223.7 | 248.0 | 257.9 | 260.8 | 273.1 |
| EPCSRST_N_0 | B31 | 233.6 | 235.0 | 166.7 | 170.3 | 194.6 | 200.1 | 216.9 | 224.3 | 248.2 | 258.9 | 261.2 | 274.3 |
| EPCSRST_N_1 | B32 | 232.8 | 233.6 | 165.4 | 168.2 | 192.8 | 197.1 | 213.0 | 218.3 | 243.5 | 251.9 | 256.6 | 266.5 |
| EPCSRST_N_2 | B34 | 235.3 | 238.2 | 167.8 | 174.6 | 196.0 | 206.3 | 216.9 | 230.3 | 248.7 | 269.2 | 262.5 | 286.5 |
| EPCSRST_N_3 | B35 | 234.3 | 234.0 | 166.1 | 166.7 | 193.7 | 194.4 | 213.7 | 214.4 | 244.1 | 245.7 | 257.0 | 259.0 |
| EPCSRST_N_4 | B36 | 236.0 | 235.7 | 169.5 | 169.9 | 198.5 | 199.2 | 220.0 | 220.7 | 253.3 | 254.8 | 267.7 | 269.7 |
| EPCSRST_N_5 | B37 | 234.7 | 234.4 | 167.5 | 168.0 | 195.6 | 196.5 | 216.4 | 217.4 | 248.1 | 250.0 | 261.8 | 264.2 |
| MONITOR | K23 | 234.1 | 234.7 | 166.3 | 169.1 | 193.9 | 198.2 | 214.2 | 220.1 | 244.6 | 254.0 | 257.5 | 268.7 |
| PLL_MON | L20 | 231.7 | 231.5 | 162.6 | 163.1 | 188.6 | 189.3 | 207.7 | 207.7 | 235.0 | 235.7 | 246.2 | 247.4 |
| TOGGLE_MON | L22 | 231.8 | 231.3 | 163.1 | 163.4 | 189.5 | 189.8 | 208.8 | 208.6 | 236.8 | 237.3 | 248.6 | 249.3 |

Table. 22. LVTTL VOH – DUT 11675

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.921 | 2.916 | 2.912 | 2.905 | 2.894 | 2.883 | 2.876 | 2.861 | 2.858 | 2.841 |
| EPCSRST_N_0 | B31 | 2.921 | 2.917 | 2.912 | 2.905 | 2.894 | 2.883 | 2.875 | 2.861 | 2.858 | 2.840 |
| EPCSRST_N_1 | B32 | 2.921 | 2.917 | 2.912 | 2.906 | 2.894 | 2.885 | 2.877 | 2.864 | 2.859 | 2.842 |
| EPCSRST_N_2 | B34 | 2.921 | 2.914 | 2.911 | 2.901 | 2.892 | 2.876 | 2.873 | 2.850 | 2.854 | 2.823 |
| EPCSRST_N_3 | B35 | 2.922 | 2.917 | 2.913 | 2.908 | 2.895 | 2.889 | 2.877 | 2.870 | 2.860 | 2.850 |
| EPCSRST_N_4 | B36 | 2.921 | 2.917 | 2.910 | 2.907 | 2.890 | 2.886 | 2.870 | 2.865 | 2.850 | 2.844 |
| EPCSRST_N_5 | B37 | 2.921 | 2.917 | 2.911 | 2.907 | 2.892 | 2.887 | 2.873 | 2.867 | 2.854 | 2.847 |
| MONITOR | K23 | 2.922 | 2.918 | 2.913 | 2.907 | 2.896 | 2.886 | 2.878 | 2.865 | 2.861 | 2.844 |
| PLL_MON | L20 | 2.923 | 2.921 | 2.916 | 2.913 | 2.901 | 2.898 | 2.887 | 2.883 | 2.873 | 2.869 |
| TOGGLE_MON | L22 | 2.923 | 2.920 | 2.915 | 2.912 | 2.900 | 2.896 | 2.885 | 2.880 | 2.870 | 2.863 |

Table. 23. LVTTL VOH – DUT 11677

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.922 | 2.917 | 2.913 | 2.906 | 2.895 | 2.884 | 2.876 | 2.862 | 2.859 | 2.841 |
| EPCSRST_N_0 | B31 | 2.922 | 2.917 | 2.913 | 2.906 | 2.894 | 2.884 | 2.876 | 2.861 | 2.858 | 2.840 |
| EPCSRST_N_1 | B32 | 2.923 | 2.918 | 2.914 | 2.907 | 2.896 | 2.887 | 2.879 | 2.865 | 2.861 | 2.844 |
| EPCSRST_N_2 | B34 | 2.922 | 2.915 | 2.912 | 2.901 | 2.893 | 2.874 | 2.873 | 2.848 | 2.855 | 2.820 |
| EPCSRST_N_3 | B35 | 2.922 | 2.919 | 2.914 | 2.909 | 2.896 | 2.891 | 2.878 | 2.873 | 2.861 | 2.854 |
| EPCSRST_N_4 | B36 | 2.921 | 2.918 | 2.911 | 2.907 | 2.890 | 2.886 | 2.869 | 2.864 | 2.849 | 2.842 |
| EPCSRST_N_5 | B37 | 2.922 | 2.918 | 2.912 | 2.908 | 2.893 | 2.889 | 2.875 | 2.869 | 2.856 | 2.849 |
| MONITOR | K23 | 2.923 | 2.918 | 2.914 | 2.907 | 2.896 | 2.884 | 2.878 | 2.861 | 2.860 | 2.838 |
| PLL_MON | L20 | 2.924 | 2.922 | 2.917 | 2.914 | 2.903 | 2.900 | 2.889 | 2.885 | 2.874 | 2.870 |
| TOGGLE_MON | L22 | 2.924 | 2.921 | 2.916 | 2.913 | 2.901 | 2.897 | 2.886 | 2.881 | 2.871 | 2.865 |

Table. 24. LVTTL VOH – DUT 11684

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.921 | 2.916 | 2.912 | 2.905 | 2.895 | 2.884 | 2.877 | 2.862 | 2.860 | 2.842 |
| EPCSRST_N_0 | B31 | 2.922 | 2.917 | 2.913 | 2.905 | 2.894 | 2.882 | 2.875 | 2.860 | 2.857 | 2.838 |
| EPCSRST_N_1 | B32 | 2.922 | 2.917 | 2.913 | 2.907 | 2.895 | 2.886 | 2.877 | 2.865 | 2.860 | 2.844 |
| EPCSRST_N_2 | B34 | 2.921 | 2.913 | 2.911 | 2.900 | 2.892 | 2.873 | 2.874 | 2.845 | 2.856 | 2.818 |
| EPCSRST_N_3 | B35 | 2.921 | 2.918 | 2.912 | 2.909 | 2.894 | 2.890 | 2.877 | 2.872 | 2.860 | 2.853 |
| EPCSRST_N_4 | B36 | 2.920 | 2.916 | 2.909 | 2.906 | 2.889 | 2.885 | 2.869 | 2.864 | 2.849 | 2.843 |
| EPCSRST_N_5 | B37 | 2.921 | 2.917 | 2.911 | 2.908 | 2.892 | 2.888 | 2.873 | 2.868 | 2.855 | 2.848 |
| MONITOR | K23 | 2.922 | 2.918 | 2.913 | 2.908 | 2.896 | 2.886 | 2.878 | 2.865 | 2.860 | 2.843 |
| PLL_MON | L20 | 2.924 | 2.922 | 2.917 | 2.914 | 2.903 | 2.900 | 2.888 | 2.885 | 2.875 | 2.870 |
| TOGGLE_MON | L22 | 2.923 | 2.921 | 2.915 | 2.913 | 2.900 | 2.898 | 2.885 | 2.882 | 2.869 | 2.867 |

Table. 25. LVTTL VOH – DUT 11744

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.921 | 2.915 | 2.911 | 2.904 | 2.893 | 2.883 | 2.875 | 2.861 | 2.857 | 2.840 |
| EPCSRST_N_0 | B31 | 2.921 | 2.916 | 2.911 | 2.904 | 2.893 | 2.881 | 2.873 | 2.858 | 2.856 | 2.837 |
| EPCSRST_N_1 | B32 | 2.921 | 2.916 | 2.912 | 2.905 | 2.894 | 2.884 | 2.877 | 2.862 | 2.859 | 2.840 |
| EPCSRST_N_2 | B34 | 2.919 | 2.912 | 2.910 | 2.898 | 2.891 | 2.871 | 2.873 | 2.844 | 2.854 | 2.816 |
| EPCSRST_N_3 | B35 | 2.920 | 2.916 | 2.911 | 2.908 | 2.893 | 2.889 | 2.876 | 2.871 | 2.858 | 2.852 |
| EPCSRST_N_4 | B36 | 2.919 | 2.915 | 2.908 | 2.905 | 2.888 | 2.884 | 2.868 | 2.863 | 2.848 | 2.841 |
| EPCSRST_N_5 | B37 | 2.919 | 2.916 | 2.910 | 2.906 | 2.891 | 2.886 | 2.872 | 2.866 | 2.853 | 2.846 |
| MONITOR | K23 | 2.921 | 2.917 | 2.912 | 2.905 | 2.894 | 2.883 | 2.876 | 2.861 | 2.858 | 2.839 |
| PLL_MON | L20 | 2.923 | 2.921 | 2.916 | 2.913 | 2.901 | 2.898 | 2.887 | 2.883 | 2.872 | 2.868 |
| TOGGLE_MON | L22 | 2.922 | 2.920 | 2.915 | 2.912 | 2.900 | 2.897 | 2.884 | 2.881 | 2.869 | 2.865 |

Table. 26. LVTTL VOH – DUT 11772

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.922 | 2.917 | 2.913 | 2.906 | 2.894 | 2.885 | 2.876 | 2.862 | 2.858 | 2.841 |
| EPCSRST_N_0 | B31 | 2.923 | 2.918 | 2.913 | 2.906 | 2.895 | 2.884 | 2.877 | 2.862 | 2.859 | 2.840 |
| EPCSRST_N_1 | B32 | 2.923 | 2.917 | 2.913 | 2.906 | 2.895 | 2.884 | 2.877 | 2.861 | 2.860 | 2.838 |
| EPCSRST_N_2 | B34 | 2.921 | 2.914 | 2.911 | 2.900 | 2.893 | 2.873 | 2.874 | 2.845 | 2.855 | 2.817 |
| EPCSRST_N_3 | B35 | 2.923 | 2.919 | 2.914 | 2.909 | 2.896 | 2.891 | 2.879 | 2.872 | 2.862 | 2.853 |
| EPCSRST_N_4 | B36 | 2.921 | 2.918 | 2.911 | 2.907 | 2.890 | 2.887 | 2.870 | 2.866 | 2.851 | 2.845 |
| EPCSRST_N_5 | B37 | 2.921 | 2.918 | 2.912 | 2.908 | 2.893 | 2.888 | 2.874 | 2.868 | 2.855 | 2.848 |
| MONITOR | K23 | 2.922 | 2.916 | 2.914 | 2.904 | 2.897 | 2.879 | 2.880 | 2.854 | 2.862 | 2.829 |
| PLL_MON | L20 | 2.925 | 2.922 | 2.917 | 2.915 | 2.903 | 2.900 | 2.889 | 2.885 | 2.874 | 2.870 |
| TOGGLE_MON | L22 | 2.924 | 2.921 | 2.916 | 2.914 | 2.901 | 2.898 | 2.886 | 2.883 | 2.871 | 2.867 |

Table. 27. LVTTL VOH – DUT 11817

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 2.921 | 2.916 | 2.913 | 2.905 | 2.894 | 2.884 | 2.876 | 2.862 | 2.859 | 2.841 |
| EPCSRST_N_0 | B31 | 2.923 | 2.917 | 2.913 | 2.906 | 2.895 | 2.884 | 2.876 | 2.861 | 2.858 | 2.839 |
| EPCSRST_N_1 | B32 | 2.923 | 2.918 | 2.914 | 2.908 | 2.896 | 2.887 | 2.879 | 2.866 | 2.861 | 2.845 |
| EPCSRST_N_2 | B34 | 2.921 | 2.914 | 2.912 | 2.901 | 2.892 | 2.875 | 2.873 | 2.849 | 2.854 | 2.822 |
| EPCSRST_N_3 | B35 | 2.922 | 2.918 | 2.913 | 2.909 | 2.896 | 2.891 | 2.878 | 2.873 | 2.861 | 2.854 |
| EPCSRST_N_4 | B36 | 2.921 | 2.917 | 2.910 | 2.906 | 2.889 | 2.885 | 2.869 | 2.864 | 2.849 | 2.842 |
| EPCSRST_N_5 | B37 | 2.922 | 2.918 | 2.912 | 2.908 | 2.893 | 2.888 | 2.874 | 2.869 | 2.856 | 2.848 |
| MONITOR | K23 | 2.923 | 2.918 | 2.914 | 2.908 | 2.896 | 2.887 | 2.879 | 2.866 | 2.861 | 2.845 |
| PLL_MON | L20 | 2.925 | 2.922 | 2.918 | 2.915 | 2.903 | 2.900 | 2.888 | 2.885 | 2.874 | 2.869 |
| TOGGLE_MON | L22 | 2.924 | 2.922 | 2.917 | 2.914 | 2.902 | 2.898 | 2.887 | 2.883 | 2.871 | 2.867 |

Table. 28. LVTTL VOL – DUT 11675

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 214.9 | 215.4 | 226.4 | 229.3 | 241.1 | 247.1 | 259.3 | 268.9 | 278.3 | 292.1 |
| EPCSRST_N_0 | B31 | 214.2 | 214.8 | 226.7 | 229.4 | 241.3 | 247.5 | 259.5 | 269.4 | 279.2 | 293.2 |
| EPCSRST_N_1 | B32 | 213.6 | 214.4 | 222.6 | 223.6 | 239.6 | 245.2 | 257.2 | 266.2 | 275.6 | 287.5 |
| EPCSRST_N_2 | B34 | 214.9 | 217.3 | 224.1 | 228.7 | 242.2 | 255.2 | 261.2 | 280.8 | 280.6 | 306.6 |
| EPCSRST_N_3 | B35 | 213.9 | 213.9 | 222.7 | 222.3 | 239.5 | 242.2 | 256.9 | 261.0 | 274.7 | 280.3 |
| EPCSRST_N_4 | B36 | 215.2 | 214.8 | 225.0 | 224.0 | 244.6 | 245.5 | 264.2 | 265.9 | 284.4 | 286.4 |
| EPCSRST_N_5 | B37 | 214.8 | 214.2 | 224.4 | 222.8 | 242.7 | 243.6 | 261.7 | 263.4 | 280.7 | 283.2 |
| MONITOR | K23 | 214.3 | 214.7 | 223.2 | 225.1 | 240.0 | 245.7 | 257.4 | 266.7 | 274.7 | 287.7 |
| PLL_MON | L20 | 212.6 | 212.1 | 220.5 | 218.5 | 233.5 | 234.0 | 248.0 | 248.9 | 262.9 | 264.0 |
| TOGGLE_MON | L22 | 212.8 | 212.4 | 221.0 | 219.8 | 235.1 | 236.6 | 249.9 | 252.4 | 265.3 | 269.2 |

Table. 29. LVTTL VOL – DUT 11677

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 214.1 | 214.8 | 225.8 | 228.6 | 240.3 | 246.4 | 258.5 | 268.0 | 277.8 | 291.5 |
| EPCSRST_N_0 | B31 | 213.0 | 213.9 | 225.4 | 228.4 | 240.4 | 246.9 | 259.1 | 269.2 | 279.0 | 293.1 |
| EPCSRST_N_1 | B32 | 212.4 | 213.2 | 221.1 | 222.5 | 237.8 | 244.0 | 255.5 | 264.9 | 273.5 | 286.2 |
| EPCSRST_N_2 | B34 | 213.5 | 216.9 | 223.2 | 228.9 | 241.4 | 256.1 | 260.6 | 282.9 | 279.8 | 309.6 |
| EPCSRST_N_3 | B35 | 213.1 | 212.8 | 221.6 | 220.7 | 238.6 | 239.7 | 255.9 | 258.3 | 273.6 | 276.7 |
| EPCSRST_N_4 | B36 | 214.4 | 214.0 | 224.8 | 223.5 | 244.9 | 245.7 | 264.9 | 266.7 | 285.6 | 287.8 |
| EPCSRST_N_5 | B37 | 213.5 | 213.1 | 222.9 | 221.7 | 240.9 | 242.0 | 259.5 | 261.6 | 278.5 | 281.0 |
| MONITOR | K23 | 213.3 | 214.5 | 222.2 | 225.5 | 239.5 | 248.3 | 257.2 | 270.7 | 275.1 | 293.6 |
| PLL_MON | L20 | 211.4 | 210.8 | 219.3 | 217.7 | 232.4 | 233.1 | 246.9 | 247.9 | 261.7 | 263.0 |
| TOGGLE_MON | L22 | 211.2 | 210.7 | 219.8 | 218.6 | 233.8 | 234.6 | 248.9 | 250.6 | 264.6 | 267.1 |

Table. 30. LVTTL VOL – DUT 11684

| | | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| Pin Name | Pin# | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 216.7 | 217.3 | 228.6 | 231.4 | 242.6 | 248.7 | 260.3 | 270.0 | 279.3 | 293.2 |
| EPCSRST_N_0 | B31 | 215.6 | 216.3 | 227.9 | 231.2 | 243.2 | 250.3 | 261.2 | 272.8 | 281.3 | 297.4 |
| EPCSRST_N_1 | B32 | 215.3 | 215.8 | 223.8 | 224.7 | 240.6 | 246.2 | 258.4 | 267.0 | 276.1 | 287.8 |
| EPCSRST_N_2 | B34 | 216.7 | 220.1 | 225.9 | 232.5 | 243.6 | 259.8 | 262.2 | 286.9 | 280.7 | 313.8 |
| EPCSRST_N_3 | B35 | 216.3 | 215.8 | 225.1 | 223.9 | 241.7 | 242.8 | 259.3 | 261.1 | 277.1 | 279.6 |
| EPCSRST_N_4 | B36 | 217.6 | 217.1 | 227.8 | 226.4 | 247.1 | 247.7 | 267.1 | 268.3 | 287.5 | 289.2 |
| EPCSRST_N_5 | B37 | 216.9 | 216.4 | 226.4 | 224.9 | 244.3 | 245.3 | 263.0 | 264.8 | 282.1 | 284.4 |
| MONITOR | K23 | 216.0 | 216.1 | 225.0 | 226.6 | 241.9 | 248.0 | 259.6 | 268.9 | 277.3 | 290.5 |
| PLL_MON | L20 | 213.6 | 213.1 | 221.7 | 219.9 | 234.5 | 235.1 | 248.5 | 249.8 | 263.3 | 264.8 |
| TOGGLE_MON | L22 | 214.9 | 213.9 | 223.1 | 220.8 | 237.1 | 236.5 | 252.8 | 251.9 | 268.5 | 267.7 |

Table. 31. LVTTL VOL – DUT 11744

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 216.2 | 216.6 | 228.2 | 230.9 | 242.7 | 248.4 | 260.5 | 270.0 | 280.0 | 293.4 |
| EPCSRST_N_0 | B31 | 215.4 | 215.9 | 228.3 | 231.5 | 243.3 | 250.2 | 262.0 | 272.9 | 281.8 | 297.6 |
| EPCSRST_N_1 | B32 | 215.0 | 215.8 | 223.8 | 225.4 | 240.5 | 247.7 | 258.2 | 268.9 | 276.3 | 290.6 |
| EPCSRST_N_2 | B34 | 216.7 | 220.0 | 225.9 | 232.2 | 243.6 | 259.7 | 262.0 | 286.8 | 281.0 | 314.0 |
| EPCSRST_N_3 | B35 | 216.4 | 215.4 | 224.8 | 223.3 | 241.6 | 242.1 | 259.2 | 260.6 | 277.3 | 279.0 |
| EPCSRST_N_4 | B36 | 217.5 | 216.9 | 227.7 | 226.3 | 247.0 | 247.7 | 267.1 | 268.3 | 287.5 | 289.2 |
| EPCSRST_N_5 | B37 | 216.7 | 215.9 | 226.1 | 224.7 | 244.5 | 245.4 | 263.1 | 264.9 | 282.3 | 284.6 |
| MONITOR | K23 | 216.0 | 216.6 | 224.8 | 227.5 | 241.8 | 249.2 | 259.8 | 271.4 | 277.5 | 293.8 |
| PLL_MON | L20 | 213.8 | 213.1 | 221.6 | 220.2 | 235.2 | 235.2 | 249.2 | 250.1 | 264.0 | 265.3 |
| TOGGLE_MON | L22 | 214.2 | 213.4 | 222.4 | 220.9 | 236.7 | 236.2 | 251.7 | 252.0 | 267.4 | 268.0 |

Table. 32. LVTTL VOL – DUT 11772

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 215.1 | 215.4 | 227.0 | 229.5 | 241.9 | 247.1 | 259.9 | 268.8 | 279.4 | 292.1 |
| EPCSRST_N_0 | B31 | 213.9 | 214.8 | 226.2 | 229.2 | 240.9 | 247.8 | 259.0 | 270.2 | 278.7 | 294.2 |
| EPCSRST_N_1 | B32 | 213.5 | 214.7 | 222.1 | 224.6 | 239.5 | 247.5 | 257.1 | 269.8 | 275.7 | 292.6 |
| EPCSRST_N_2 | B34 | 214.9 | 218.2 | 224.4 | 231.0 | 242.7 | 258.9 | 261.5 | 286.3 | 280.6 | 313.8 |
| EPCSRST_N_3 | B35 | 214.1 | 213.7 | 222.5 | 221.6 | 239.4 | 241.1 | 257.0 | 259.7 | 274.4 | 278.3 |
| EPCSRST_N_4 | B36 | 215.4 | 214.8 | 225.3 | 224.1 | 244.8 | 245.2 | 264.5 | 265.7 | 284.5 | 286.5 |
| EPCSRST_N_5 | B37 | 215.0 | 214.3 | 224.5 | 223.3 | 242.8 | 243.5 | 261.3 | 263.1 | 280.3 | 283.0 |
| MONITOR | K23 | 214.5 | 216.7 | 223.3 | 229.1 | 239.7 | 253.7 | 256.9 | 278.6 | 274.2 | 304.0 |
| PLL_MON | L20 | 212.2 | 211.6 | 220.1 | 219.0 | 233.4 | 233.7 | 247.6 | 248.8 | 262.5 | 264.0 |
| TOGGLE_MON | L22 | 212.9 | 211.8 | 220.8 | 219.0 | 235.1 | 234.5 | 249.8 | 250.2 | 265.4 | 265.8 |

Table. 33. LVTTL VOL – DUT 11817

| Pin Name | Pin# | 2mA | | 4mA | | 8mA | | 12mA | | 16mA | |
|-------------|------|---------|----------|---------|----------|---------|----------|---------|----------|---------|----------|
| | | Pre-rad | Post-rad |
| TID_BUF_OUT | A33 | 215.5 | 216.2 | 227.1 | 229.8 | 241.7 | 248.1 | 259.8 | 269.4 | 279.0 | 292.8 |
| EPCSRST_N_0 | B31 | 214.2 | 215.2 | 226.2 | 229.5 | 241.3 | 248.2 | 260.0 | 270.5 | 279.8 | 294.8 |
| EPCSRST_N_1 | B32 | 213.1 | 214.0 | 221.8 | 223.1 | 238.7 | 244.5 | 256.4 | 265.1 | 274.3 | 285.8 |
| EPCSRST_N_2 | B34 | 215.5 | 218.4 | 224.7 | 230.1 | 242.8 | 256.7 | 261.7 | 282.7 | 281.0 | 308.9 |
| EPCSRST_N_3 | B35 | 214.6 | 213.9 | 223.0 | 222.1 | 239.7 | 240.7 | 257.0 | 259.0 | 274.7 | 277.2 |
| EPCSRST_N_4 | B36 | 216.2 | 215.9 | 226.3 | 225.3 | 246.0 | 247.2 | 266.4 | 268.0 | 287.1 | 289.5 |
| EPCSRST_N_5 | B37 | 214.9 | 214.6 | 224.4 | 223.3 | 242.3 | 243.7 | 261.0 | 263.4 | 280.2 | 283.0 |
| MONITOR | K23 | 214.6 | 215.4 | 223.0 | 225.1 | 240.1 | 246.1 | 257.6 | 267.2 | 275.3 | 288.6 |
| PLL_MON | L20 | 212.3 | 211.9 | 220.1 | 218.2 | 233.1 | 233.9 | 247.6 | 249.0 | 262.6 | 264.0 |
| TOGGLE_MON | L22 | 212.1 | 211.7 | 220.4 | 218.8 | 234.4 | 234.8 | 249.5 | 250.2 | 265.3 | 266.4 |

E. Propagation Delay

Table 34 lists the pre-irradiation and post-irradiation propagation delay measurements. It shows that the change due to radiation on each DUT is not significant and every DUT passes the 10% degradation criterion.

Table. 34. Pre-irradiation and Post-irradiation Propagation Delay Change

| DUT | Total Dose | Pre-irradiation (μs) | Post-irradiation (μs) | Change Degradation (%) |
|-------|------------|-------------------------|-----------------------|---------------------------|
| 11675 | 125 krad | 0.453 | 0.457 | 0.88 |
| 11677 | 125 krad | 0.45 | 0.452 | 0.44 |
| 11684 | 125 krad | 0.462 | 0.466 | 0.87 |
| 11744 | 125 krad | 0.467 | 0.469 | 0.43 |
| 11772 | 125 krad | 0.455 | 0.456 | 0.22 |
| 11817 | 125 krad | 0.462 | 0.467 | 1.08 |

F. Transition Time

The figures below show the pre-irradiation and post-irradiation transitions edges. In each case the radiation induced transition degradation is not observable.

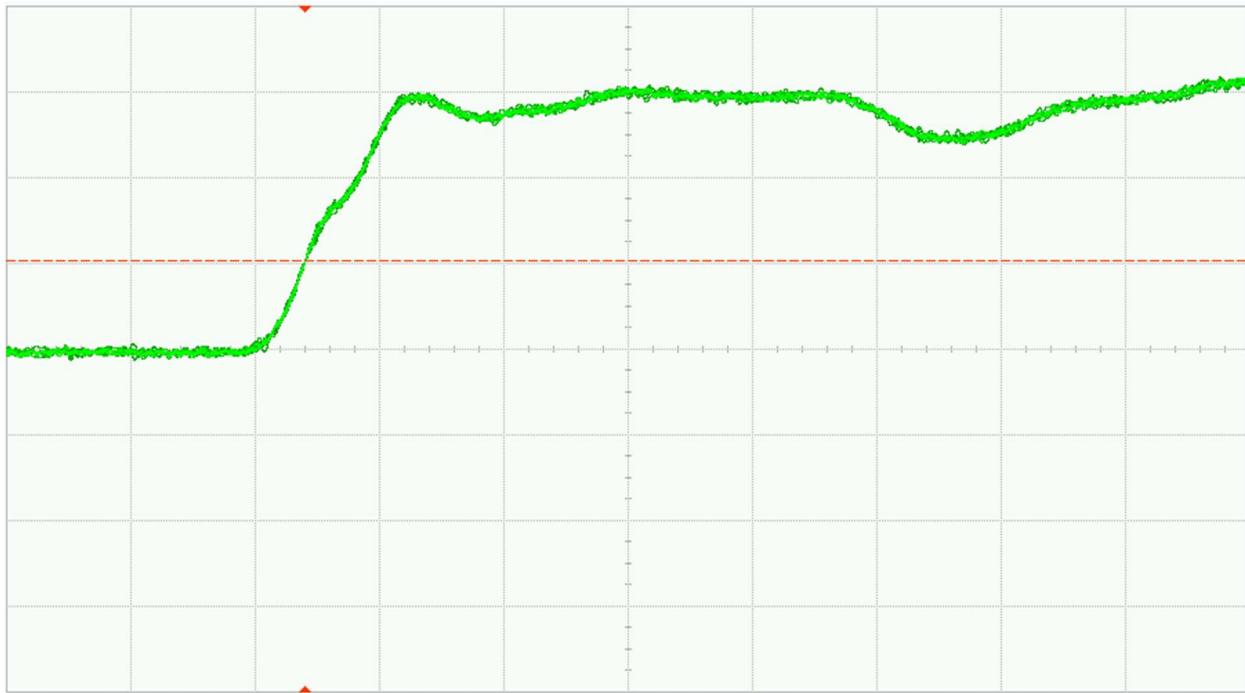


Fig. 26 (a). DUT 11675 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 26 (b). DUT 11675 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

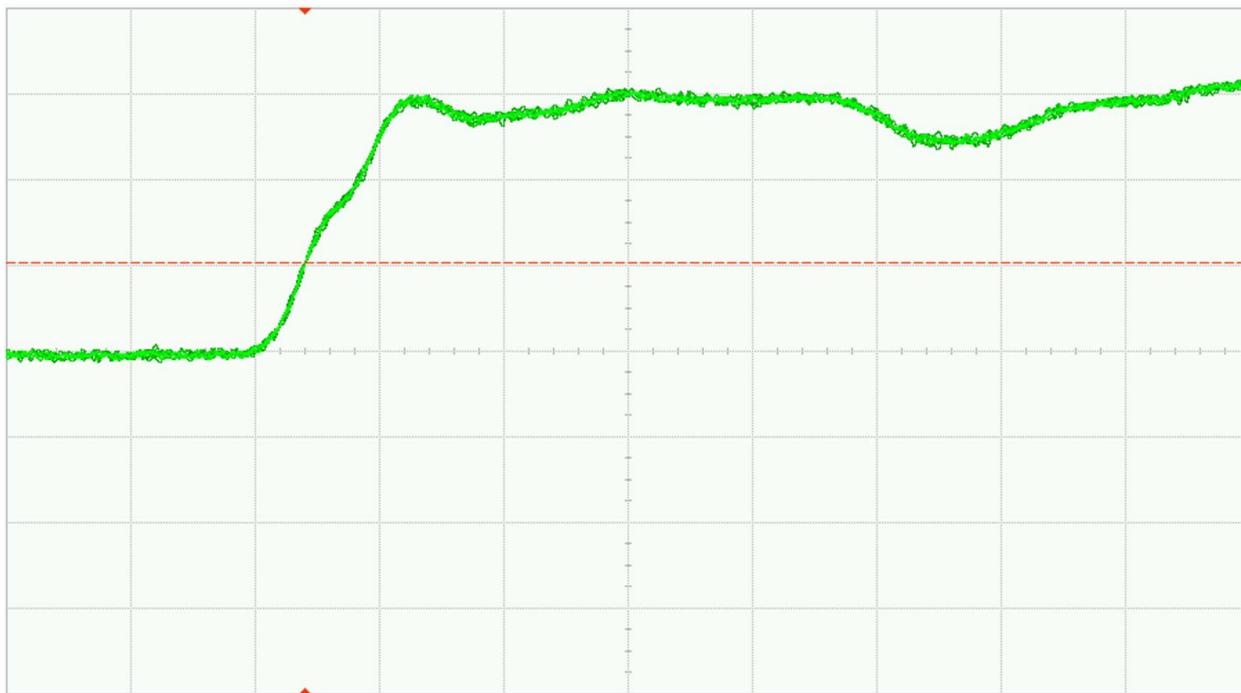


Fig. 27 (a). DUT 11677 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

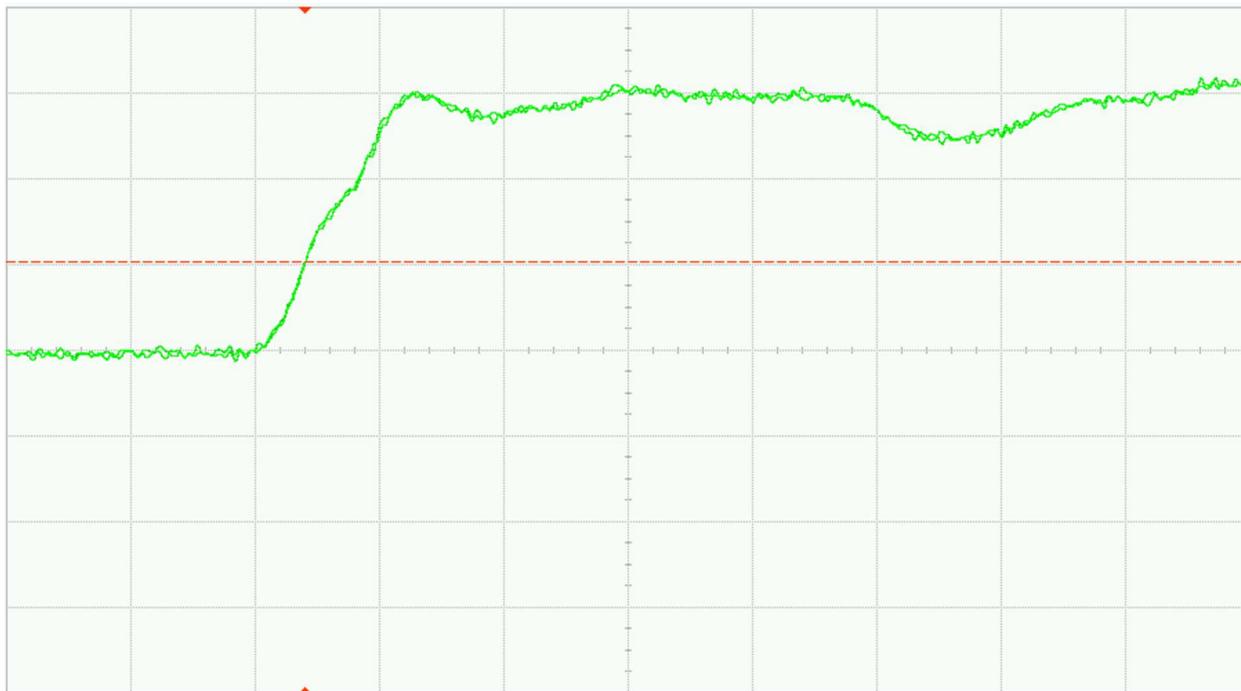


Fig. 27 (b). DUT 11677 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 28 (a). DUT 11684 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

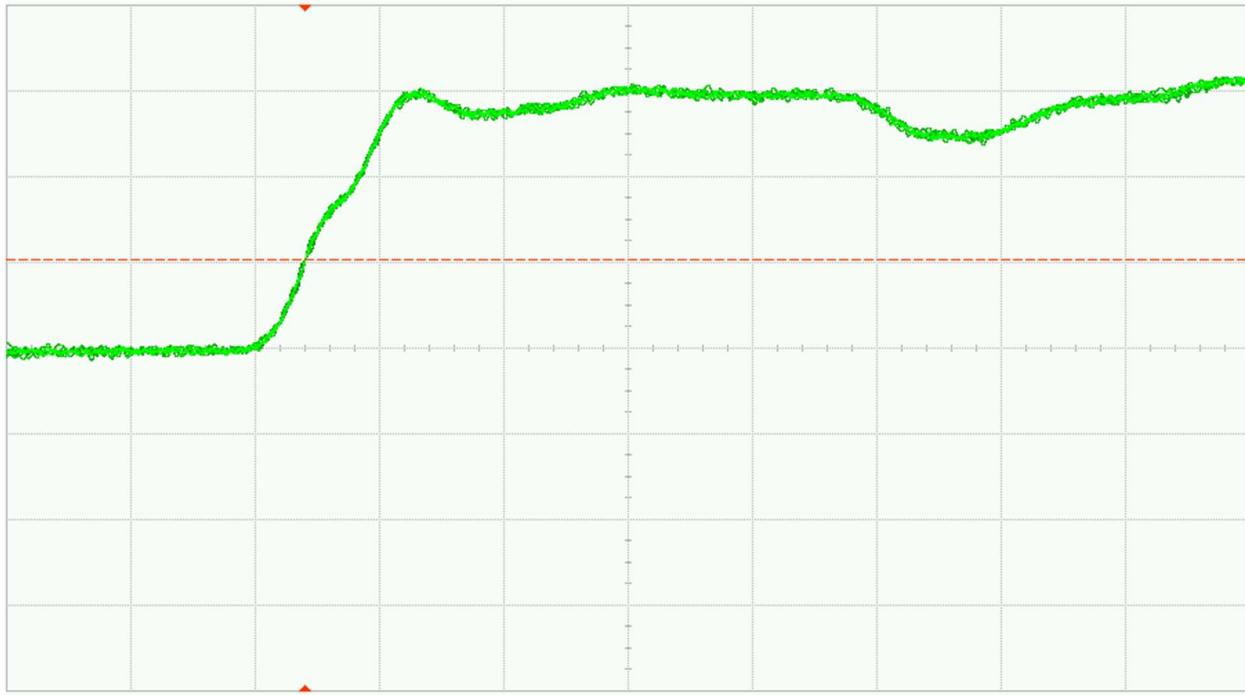


Fig. 28 (b). DUT 11684 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

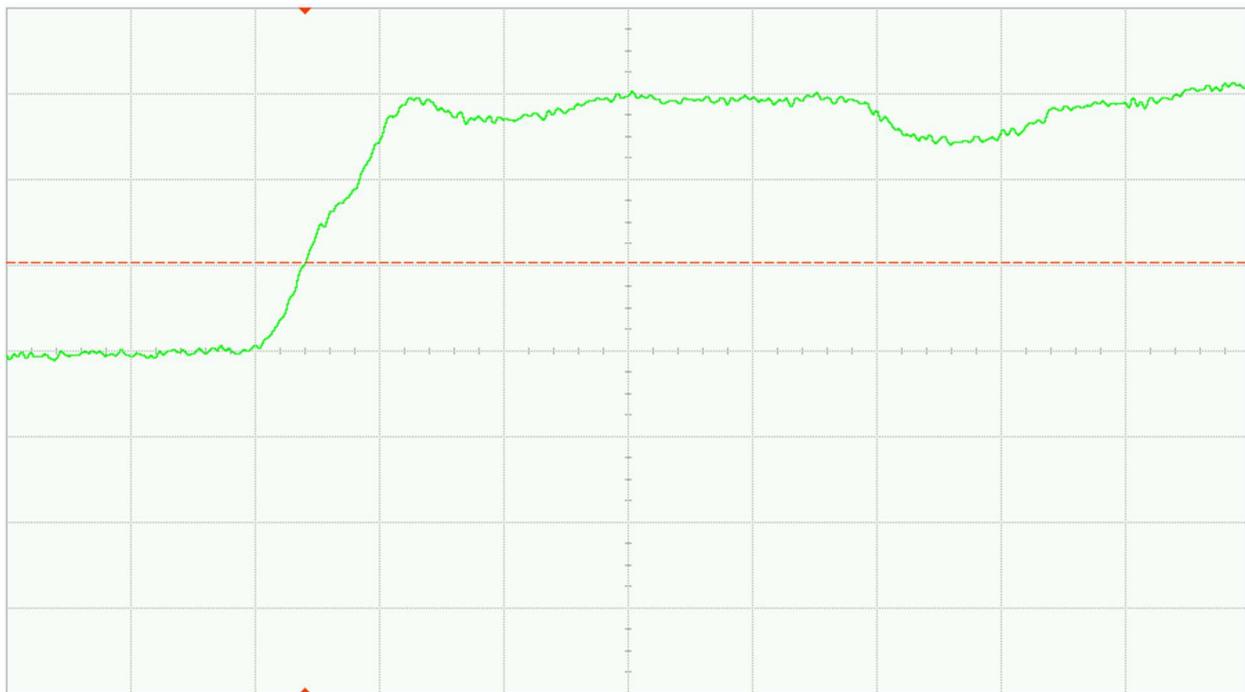


Fig. 29 (a). DUT 11744 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

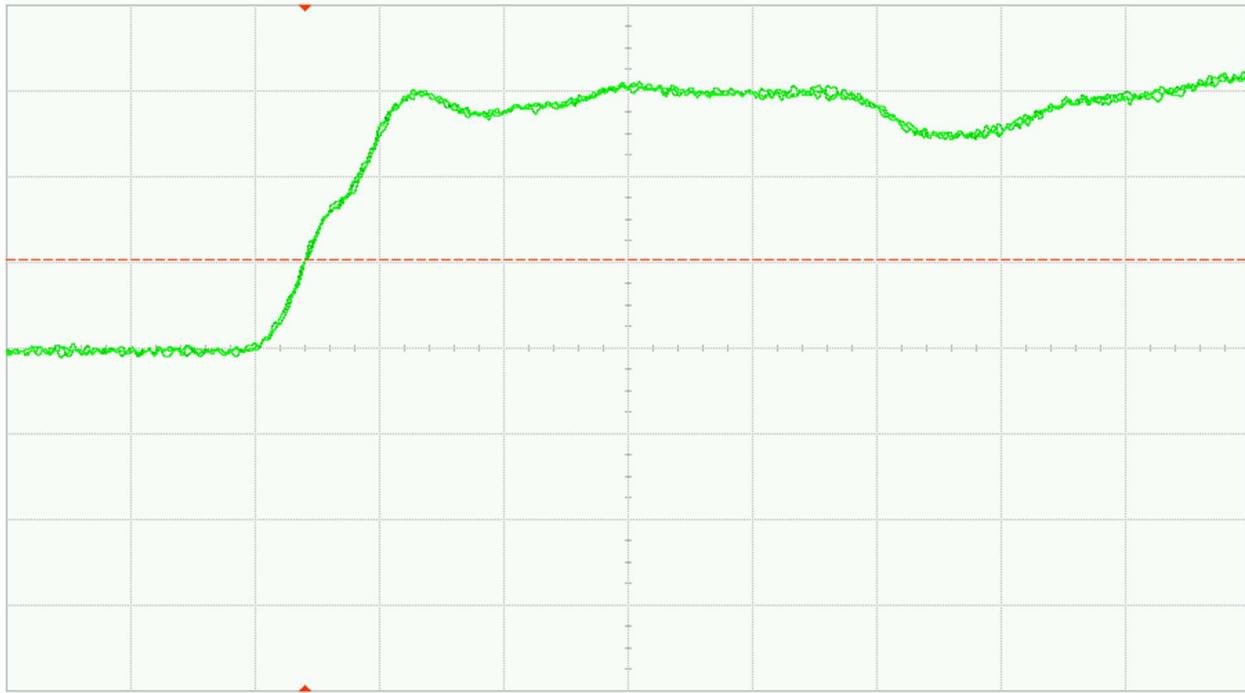


Fig. 29 (b). DUT 11744 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 30 (a). DUT 11772 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

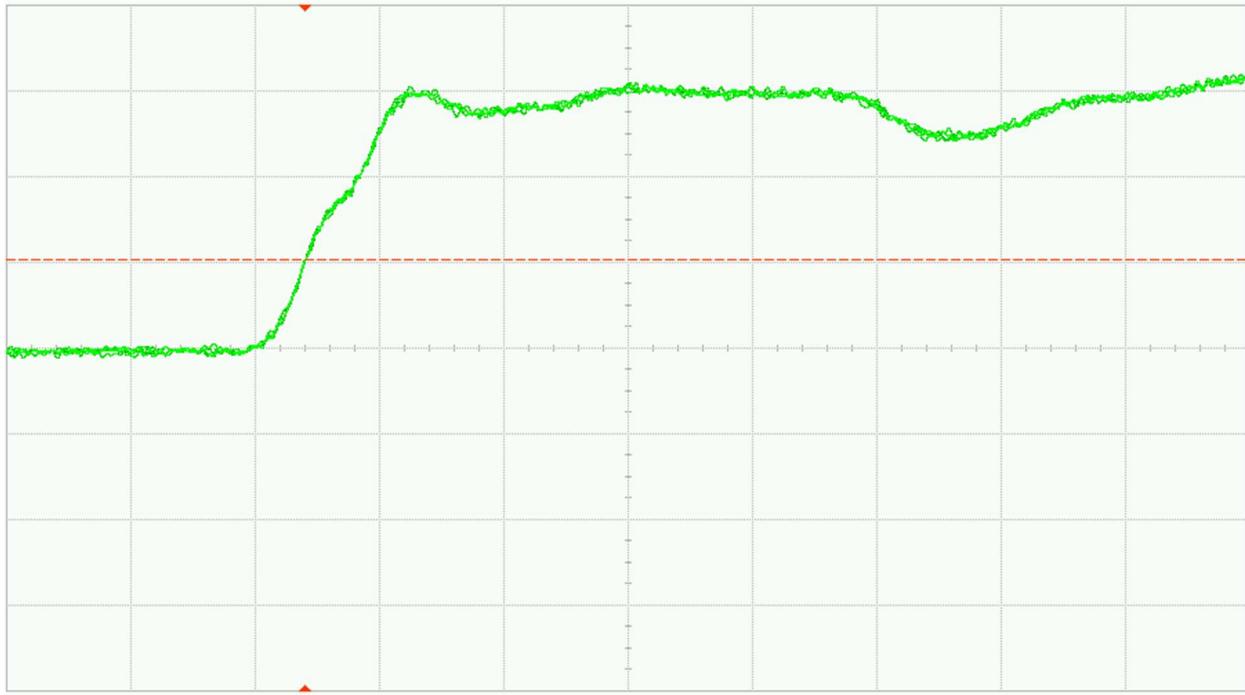


Fig. 30 (b). DUT 11772 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

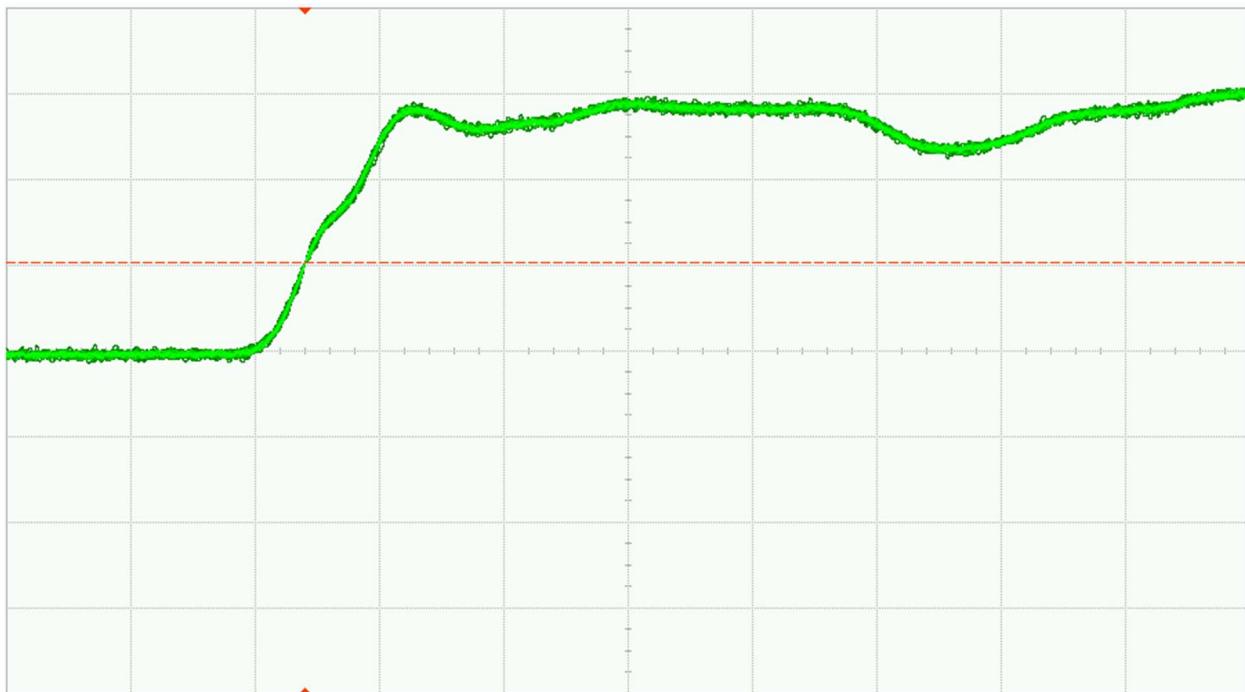


Fig. 31 (a). DUT 11817 pre-irradiation rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

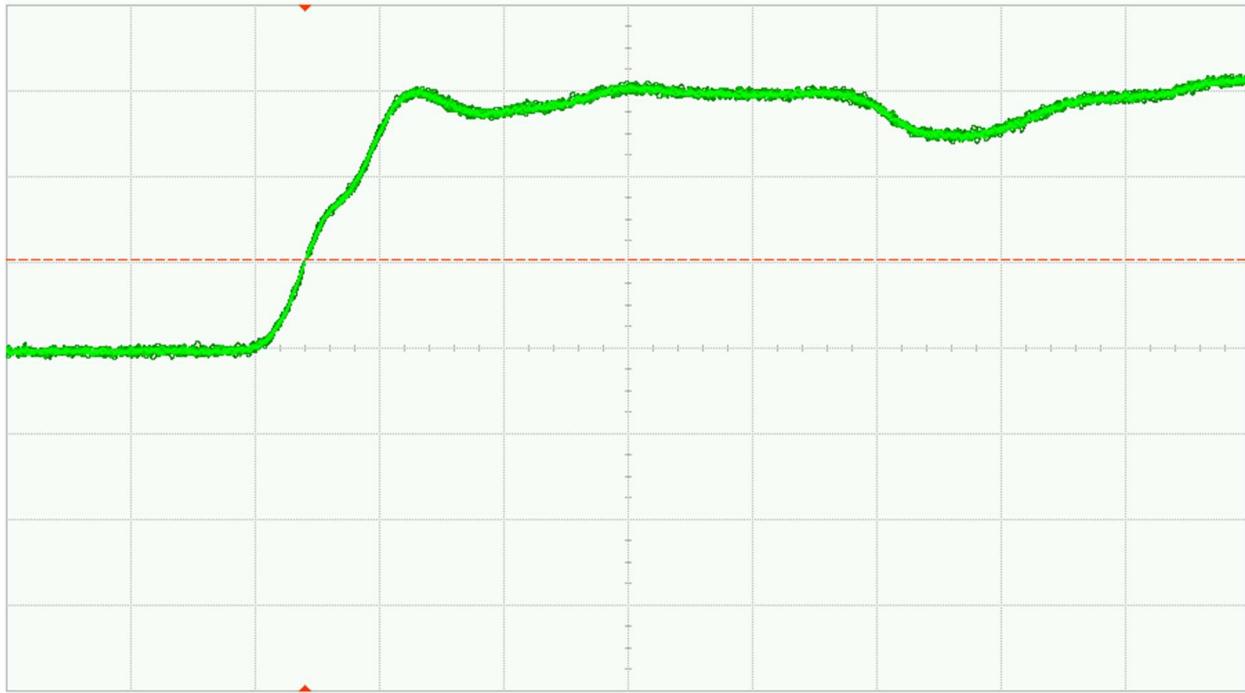


Fig. 31 (b). DUT 11817 post-annealing rising edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 32 (a). DUT 11675 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 32 (b). DUT 11675 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

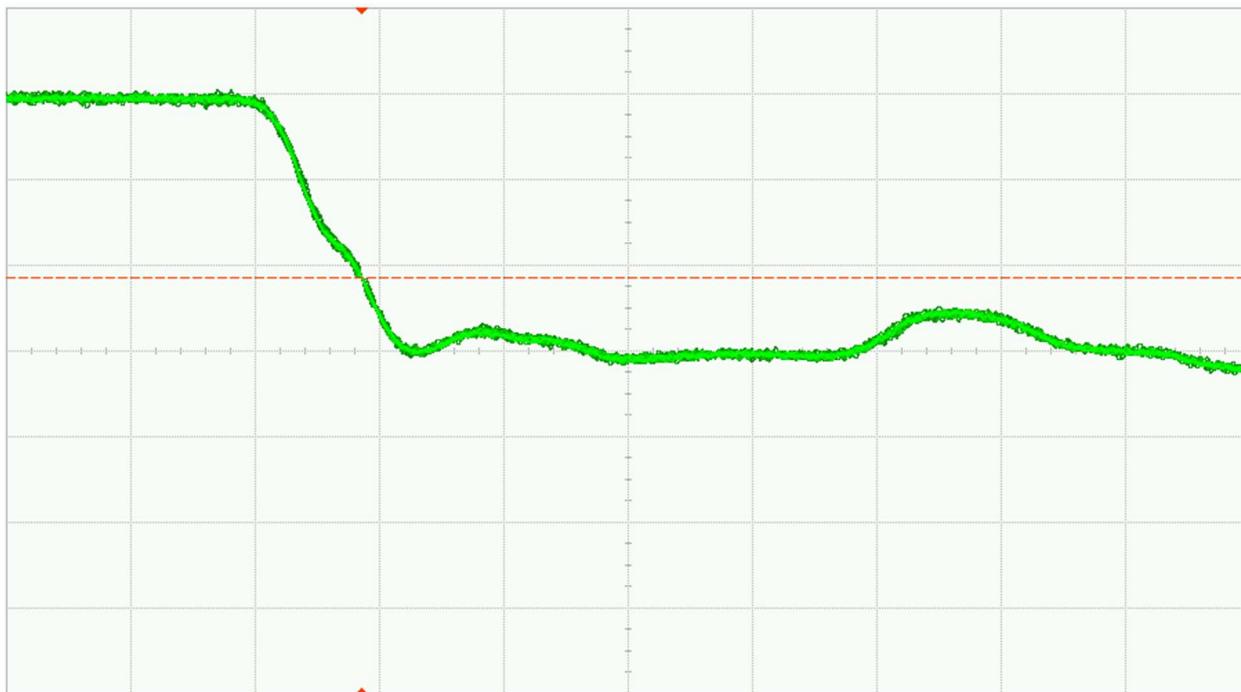


Fig. 33 (a). DUT 11677 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 33 (b). DUT 11677 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 34 (a). DUT 11684 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 34 (b). DUT 11684 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 35 (a). DUT 11744 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

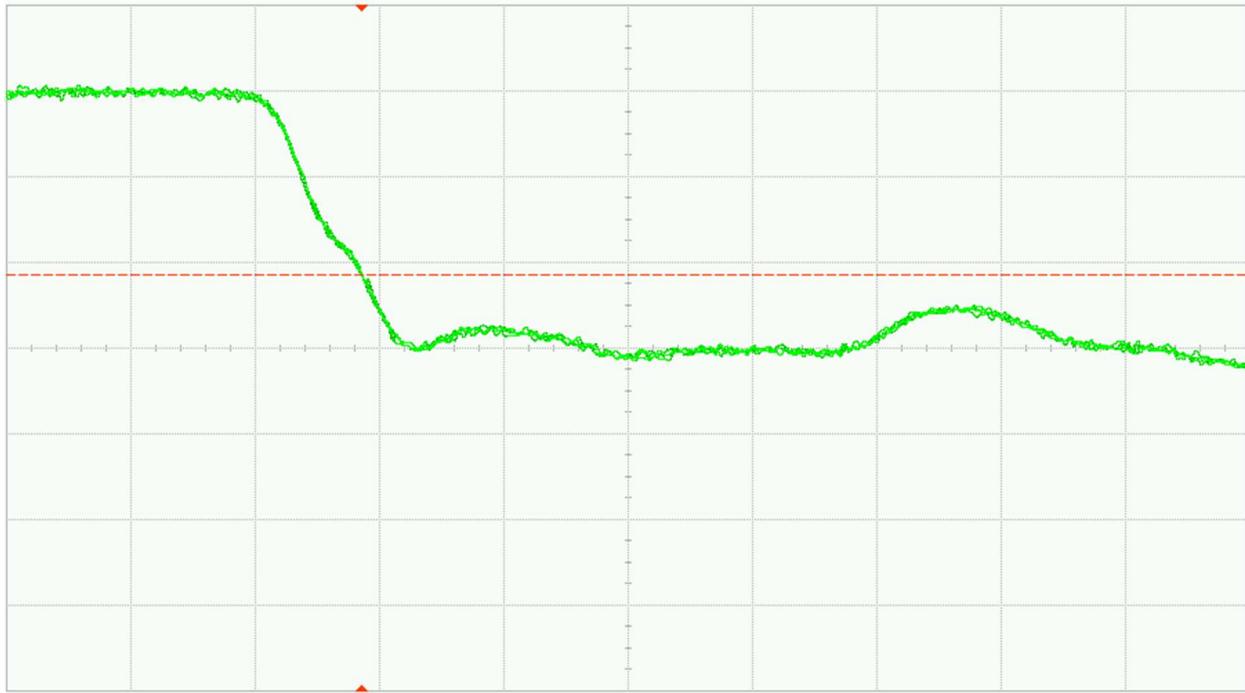


Fig. 35 (b). DUT 11744 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 36 (a). DUT 11772 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

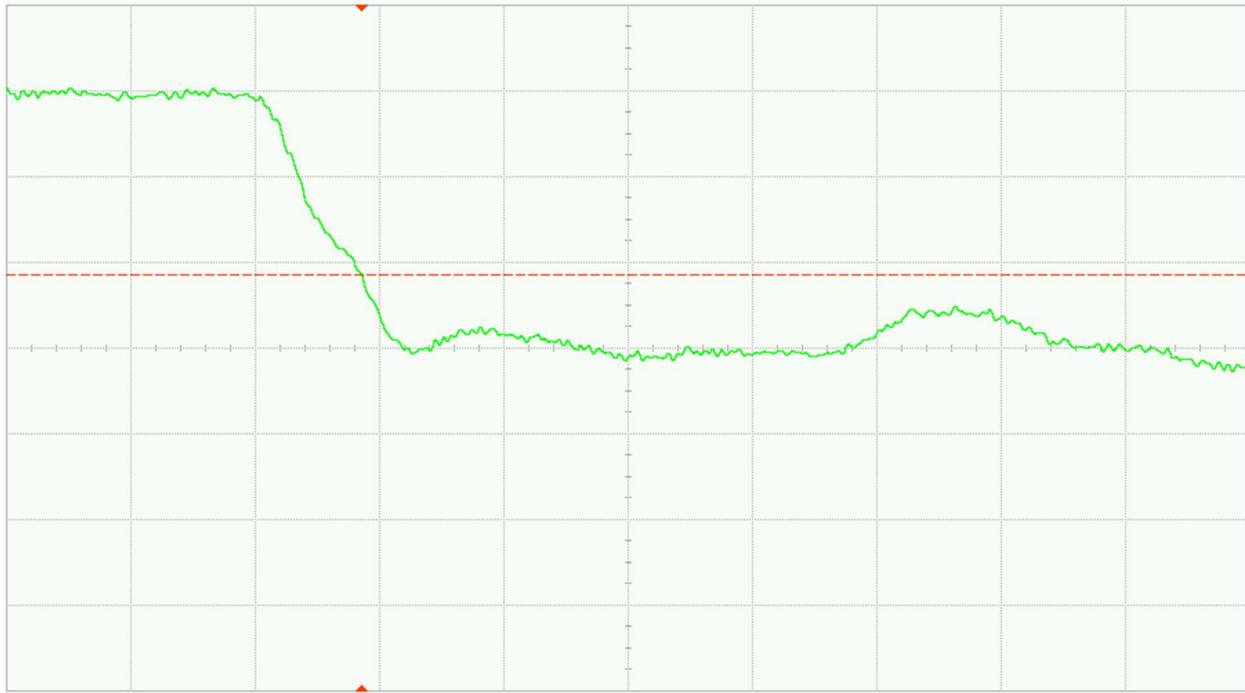


Fig. 36 (b). DUT 11772 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div



Fig. 37 (a). DUT 11817 pre-irradiation falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

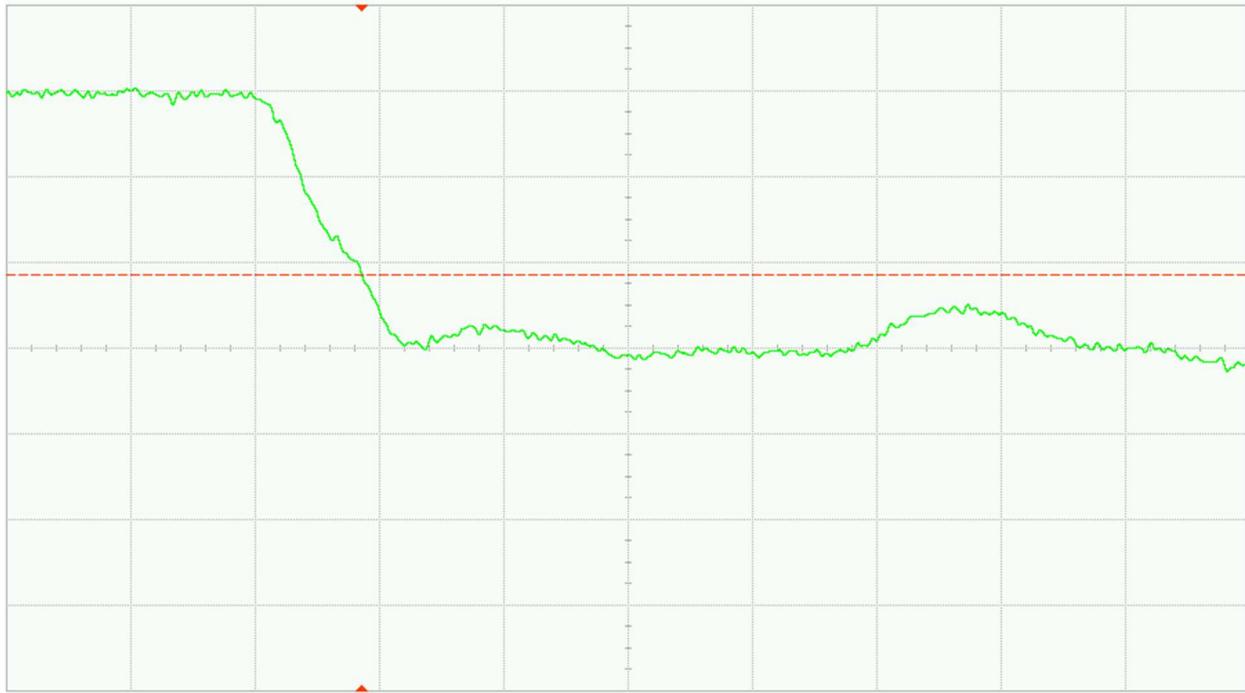


Fig. 37 (b). DUT 11817 post-annealing falling edge, abscissa scale is 1V/div and ordinate scale is 2ns/div

Appendix A

Table. 35. High level block diagrams of blocks used to perform fabric functional coverage pre and post-irradiation

| Block | Coverage |
|----------------------|--|
| Combo Block | combinatorial macros available in the RTG4 library |
| Register Block | sequential macros available in the RTG4 library |
| UPROM | |
| Embedded SRAM Blocks | full toggle coverage on 209 fabric LSRAM & 210 μ RAM blocks using dual port/ two port configurations (x18 width) |
| Shift Register Block | core utilization |
| IO Block | IO utilization |
| Math Block | full toggle coverage on 462 fabric math blocks with maximum width configuration |

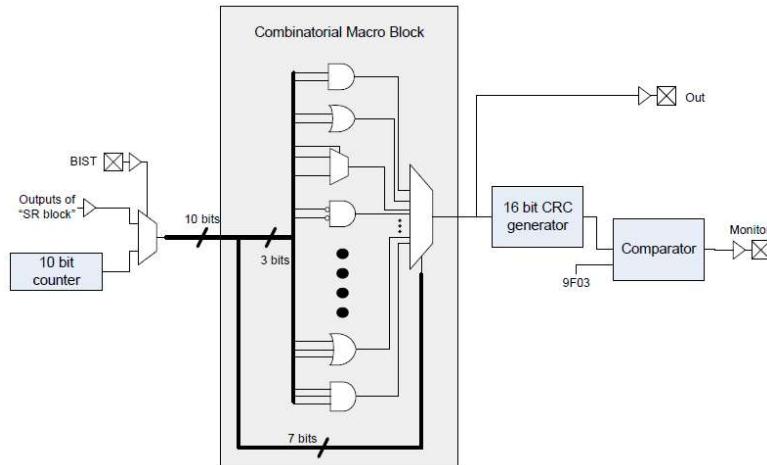


Fig. 38. Combo Block

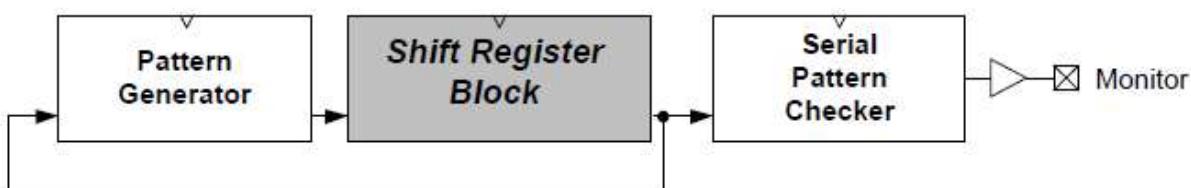


Fig. 39. Shift Register Block

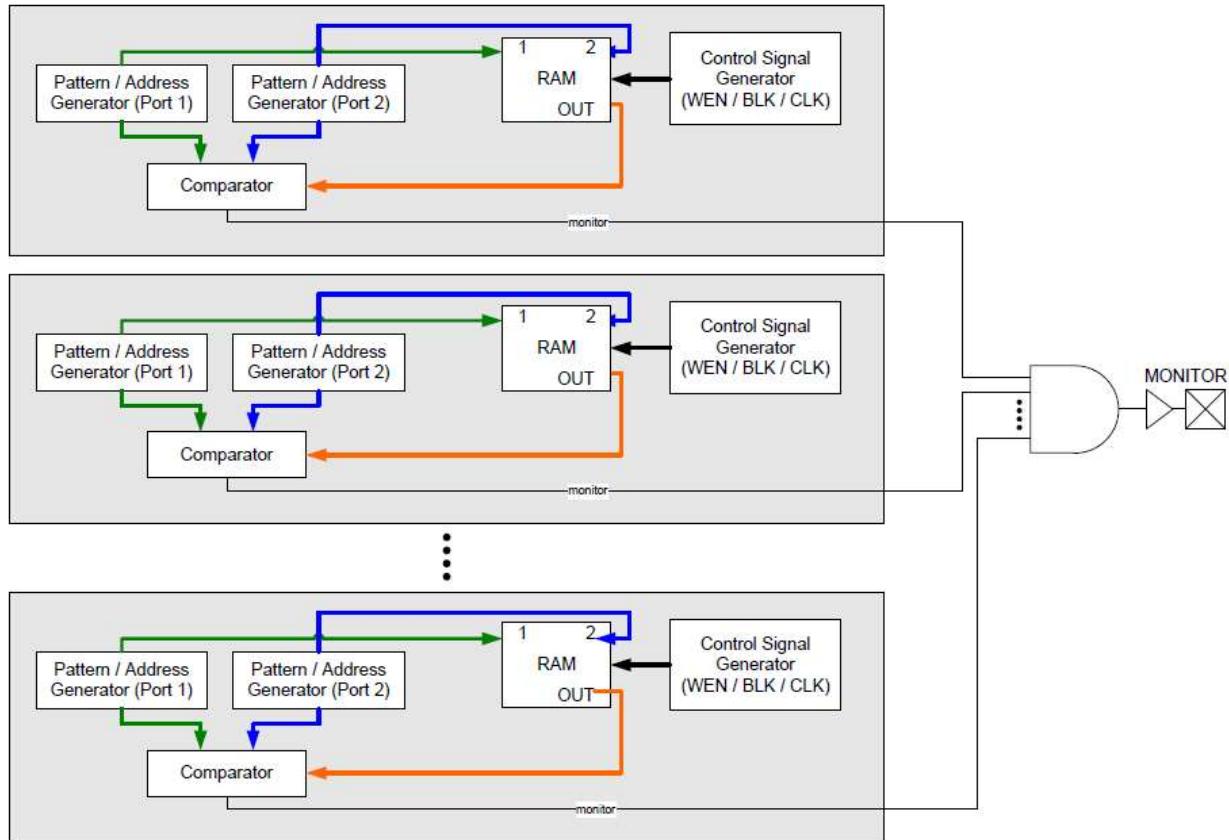


Fig. 40. Embedded Ram Blocks

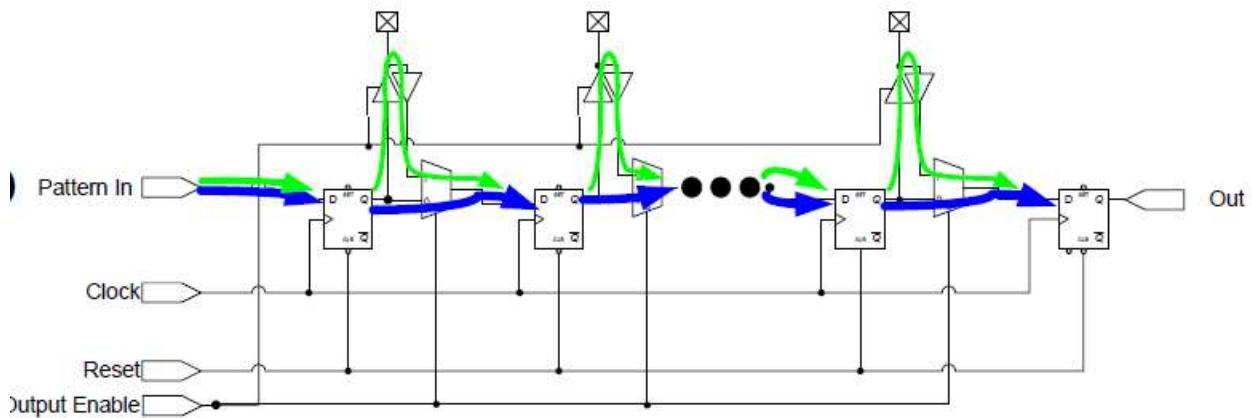


Fig. 41. IO Block

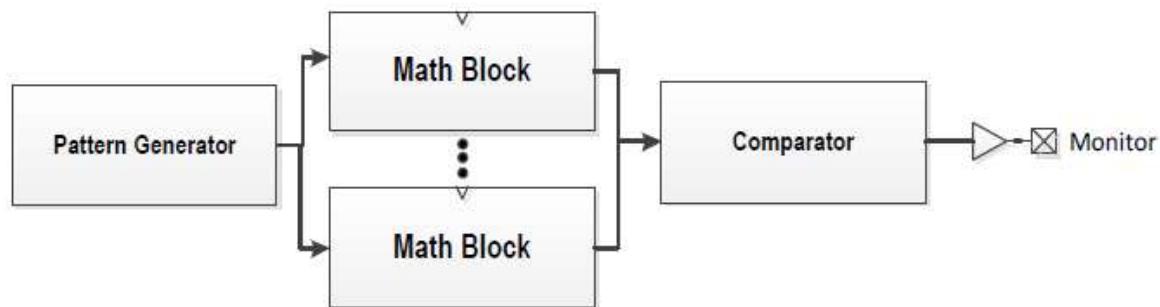


Fig. 42. Math Block



Microsemi Headquarters
One Enterprise, Aliso Viejo,
CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
Email: AVO-sales.support@microchip.com
www.microsemi.com

© 2015–2018 Microsemi. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at www.microsemi.com.