

This Document describes and specifies the electrical and mechanical characteristics of SGE2655-3 high voltage transformer for CCFL inverter power supply. This component should be designed and manufactured in accordance with Engineering Specification LES3811T

1. Electrical Characteristics


(Based on 204D production sampling Data)

Items	Inductance (at 10Khz, 0.1V)			Items	D.C Resistance		
	Min	Nom	Max		Min	Nom	Max
L1-2, L2-3 (uH)	222	244.7	266	R1-2, R2-3(mΩ)	180	187	194
L4-5 (mH)	1055	1142	1229	Rdc4-5(Ω)	390	400	410
L _{LKG2-4} , L _{LKG4-6} (uH)	Inductance (at 100Khz, 1Vrms)			R1-2/R2-3	0.96	1	1.04
	21	23	25	Balance of Primary DC resistance will be used as Bifilar winding measure tool			
Should be shorted pin 4-5							
Secondary Self Capacitance				HP4280A 1Mhz C meter, Floating mode			
C4-5 (pF)	2.0	2.5	3.0				
Dielectric Voltage Withstand							
Secondary to Core		60 Hz.,Arc-detect enabled, 5 sec. min., 200uA max. leakage current		2500Vrms min. (1min. 60Hz)			
Primary to Core				1000Vrms min.			
Primary to Secondary				2000Vrms min.			
Operating Test							
V4-5		Primary driven with 60 kHz. sine wave source (pin 1-3), secondary measured with Tektronix P6015 (or equiv.)..		2000Vrms min.			

2. Winding Specifications

	Primary		Secondary
	Pin 1 – 2	Pin 2-3	Pin 4-5
Winding Sequence	2S-1F	3S-2F	5S-4F
Wire Size & Type	#31, Single Insulation, 130°C	#31, Single Insulation, 130°C	#46, Triple insulation, 130°C
Number of Turns	24	24	1700
Winding Method	Bifilar on Sector #1		Sector #3 to #7. skip #2

3. Physical Specification & Wiring Diagram

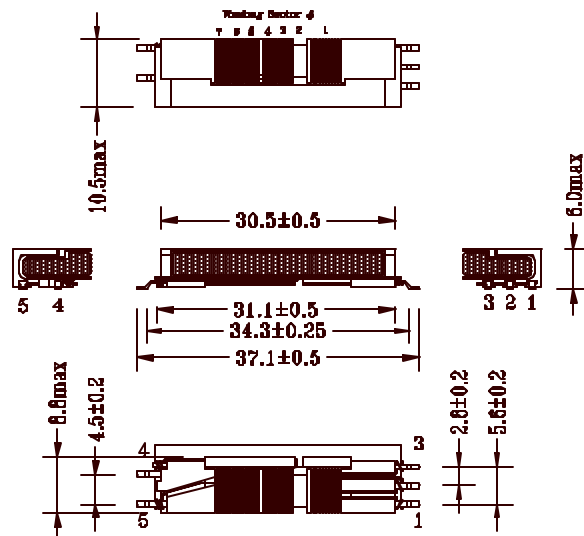

PCB PAD RECOMMENDATION

