


16 Amp Schottky Rectifiers

USD735C — USD745C

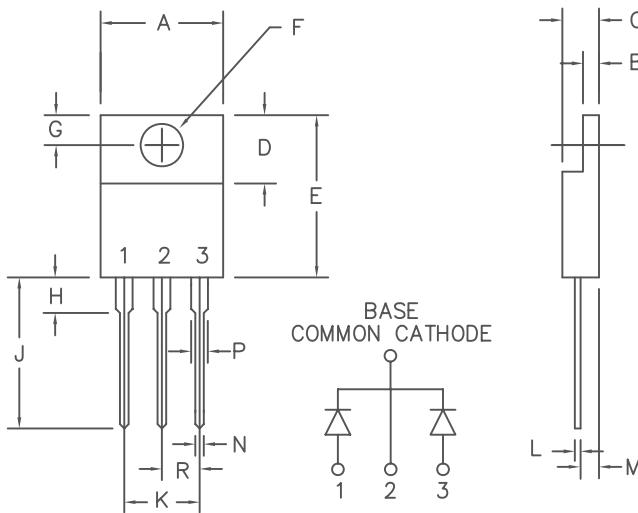

| Dim. | Inches | | Millimeter | | Notes |
|------|---------|---------|------------|---------|-------|
| | Minimum | Maximum | Minimum | Maximum | |
| A | .390 | .415 | 9.91 | 10.54 | |
| B | .045 | .055 | 1.14 | 1.40 | |
| C | .180 | .190 | 4.57 | 4.83 | |
| D | .245 | .260 | 6.22 | 6.60 | |
| E | .550 | .650 | 13.97 | 16.51 | |
| F | .139 | .161 | 3.53 | 4.09 | Dia. |
| G | .100 | .135 | 2.54 | 3.43 | |
| H | --- | .250 | --- | 6.35 | |
| J | .500 | .580 | 12.70 | 14.73 | |
| K | .190 | .210 | 4.83 | 5.33 | |
| L | .014 | .022 | .357 | .559 | |
| M | .080 | .115 | 2.03 | 2.92 | |
| N | .015 | .040 | .380 | 1.02 | |
| P | .045 | .070 | 1.14 | 1.78 | |
| R | .090 | .110 | 2.29 | 2.79 | |

PLASTIC TO-220AB

| Microsemi Catalog Number | Industry Part Number | Working Reverse Voltage | Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|----------------------|-------------------------|----------------------|---------------------------------|
| USD735C | | 35V | 35V | |
| USD740C | | 40V | 40V | |
| USD745C | | 45V | 45V | |

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Power Loss
- 150°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

| | | |
|--------------------------------|---------------------------|--|
| Average forward current | I F(AV) 16 Amps | T _C = 124°C Square wave, R _{θJC} = 1.2°C/W |
| Average forward current | I F(AV) 8 Amps | T _C = 124°C Square wave, R _{θJC} = 2.4°C/W |
| Maximum surge current | I F(AV) 225 Amps | 8.3 ms, half sine, T _J = 150°C |
| Max repetitive reverse current | I R(OV) 2 Amps | f = 1KHZ, 25°C, 1uS Square wave |
| Max peak forward voltage | V _{FM} .49 Volts | FM = 8A: T _J = 25°C* |
| Typical peak forward voltage | V _{FM} .33 Volts | FM = 8A: T _J = 150°C* |
| Max. peak reverse current | I _{RM} 2 mA | V _{RRM} , T _J = 25°C |
| Typical peak reverse current | I _{RM} 50 mA | V _{RRM} , T _J = 100°C* |
| Typical junction capacitance | C _J 575 pF | V _R = 5.0V, T _J = 25°C |

* Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

| | | |
|---------------------------------|------------------|---------------------------------------|
| Storage temp range | T _{STG} | -55°C to 150°C |
| Operating junction temp range | T _J | -55°C to 150°C |
| Max thermal resistance per leg | R _{θJC} | 1.2°C/W |
| Max thermal resistance per pkg. | R _{θJC} | 2.4°C/W |
| Mounting torque | | 8-12 inch pounds maximum (6-32 screw) |
| Weight | | .08 ounces (2.3 grams) typical |



SCOTTSDALE
8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-31-07 Rev. 2

USD735C – USD745C

Figure 1
Typical Forward Characteristic – Per Leg

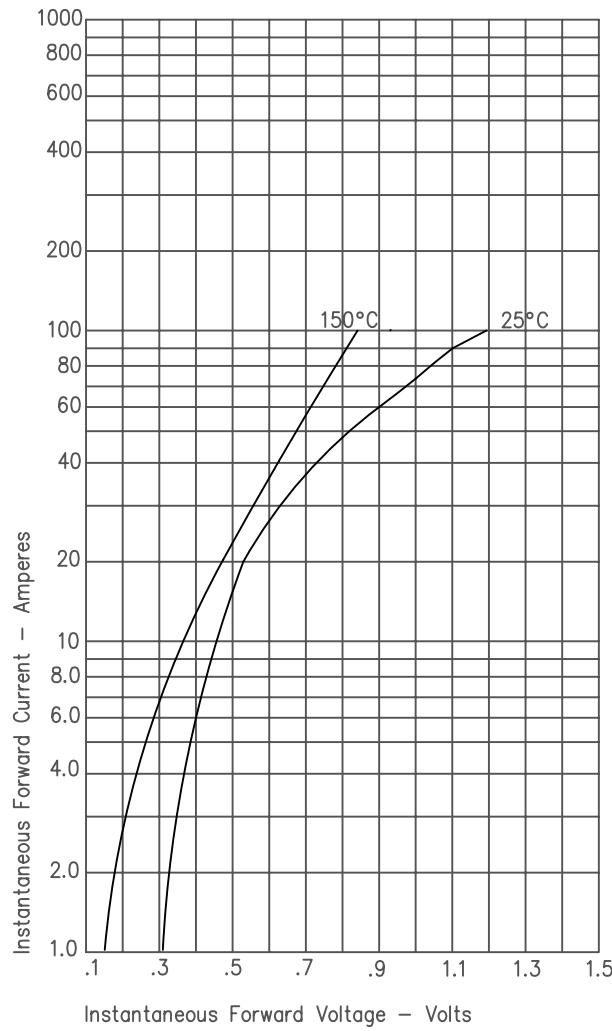


Figure 2
Typical Reverse Characteristics – Per Leg

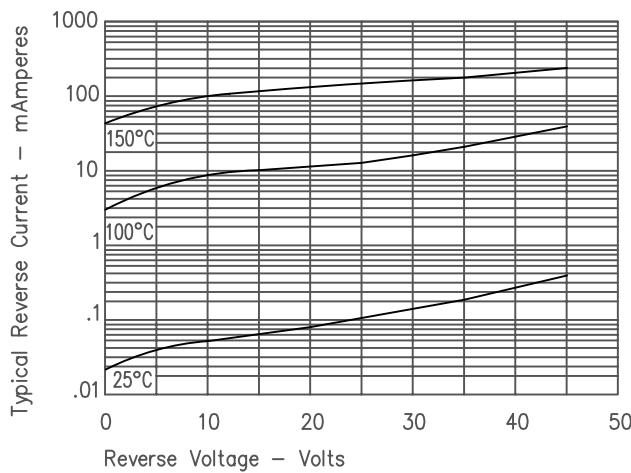


Figure 3
Typical Junction Capacitance – Per Leg

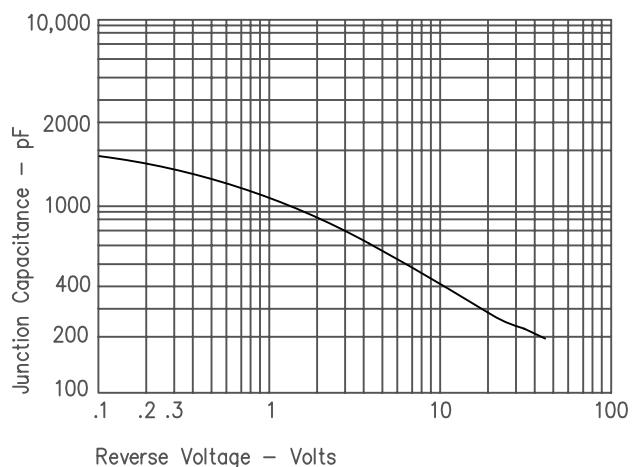


Figure 4
Forward Current Derating – Per Leg

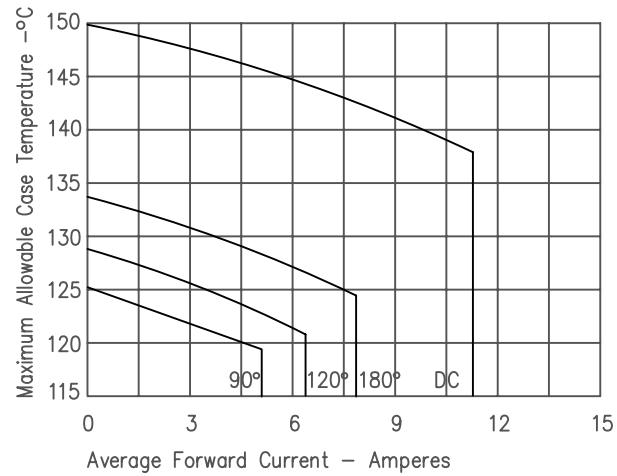


Figure 5
Maximum Forward Power Dissipation – Per Leg

