



PolarFire[®] FPGA Macro Library Guide

INTRODUCTION

This macro library guide supports the PolarFire FPGA family. See the Microchip website for macro guides for other families.

This guide follows a naming convention for sequential macros that is unambiguous and extensible, making it possible to understand the function of the macros by their name alone.

The first two mandatory characters of the macro name will indicate the basic macro function:

- DF - D-type flip-flop
- DL - D-type latch

The next mandatory character indicates the output polarity:

- I - output inverted (QN with bubble)
- N - output non-inverted (Q without bubble)

The next mandatory number indicates the polarity of the clock or gate:

- 1 - rising edge triggered flip-flop or transparent high latch (non-bubbled)
- 0 - falling edge triggered flip-flop or transparent low latch (bubbled)

The next two optional characters indicate the polarity of the Enable pin, if present:

- E0 - active low enable (bubbled)
- E1 - active high enable (non-bubbled)

The next two optional characters indicate the polarity of the asynchronous Preset pin, if present:

- P0 - active low asynchronous preset (bubbled)
- P1 - active high asynchronous preset (non-bubbled)

The next two optional characters indicate the polarity of the asynchronous Clear pin, if present:

- C0 - active low asynchronous clear (bubbled)
- C1 - active high asynchronous clear (non-bubbled)

All sequential and combinatorial macros (except MX4 and XOR8) use one logic element in the PolarFire FPGA family.

As an example, the macro DFN1E1C0 indicates a D-type flip-flop (DF) with a non-inverted (N) Q output, positive-edge triggered (1), with Active High Clock Enable (E1) and Active Low Asynchronous Clear (C0). See [Figure 1](#).

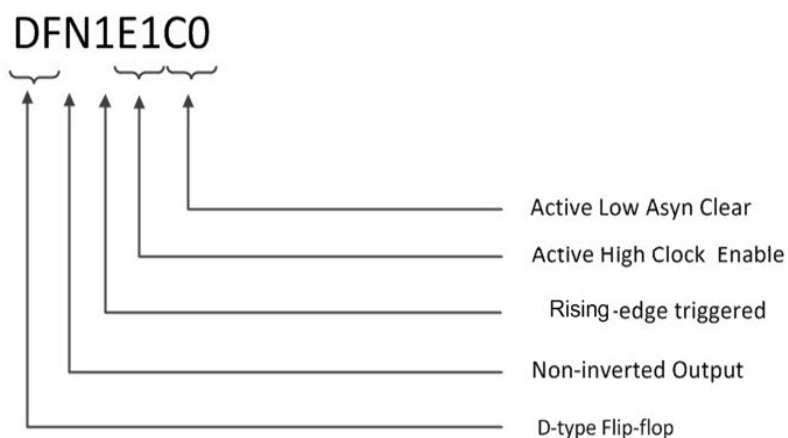


FIGURE 1: NAMING CONVENTION

TRUTH TABLE NOTATION

The truth table states in this User Guide are defined as follows:

State	Meaning
0	Logic "0"
1	Logic "1"
X	Don't Care (for Inputs), Unknown (for Outputs)
Z	High Impedance

USER PARAMETER/GENERIC

WARNING_MSGS_ON

This feature enables you to disable the warning messages display. Default is ON ('True' in VHDL and '1' in Verilog).

Contents

Introduction	1
Truth Table Notation	2
User Parameter/Generics	2
AND2	5
AND3	5
AND4	6
CFG1/2/3/4 and LUTs (Look-Up Tables)	6
CFG2	6
CFG3	7
CFG4	8
BUFD	8
BUFF	9
CLKINT	9
CLKINT_PRESERVE	10
GCLKINT	10
RCLKINT	11
RGCLKINT	11
SLE	12
ARI1	13
FCEND_BUFF	15
FCINIT_BUFF	15
DFN1	15
DFN1C0	16
DFN1E1	17
DFN1E1C0	17
DFN1E1P0	18
DFN1P0	18
DLN1	19
DLN1C0	19
DLN1P0	20
INV	21
INVD	21
MX2	21
MX4	22
NAND2	22
NAND3	23
NAND4	23
NOR2	24
NOR3	24
NOR4	25
OR2	25
OR3	26
OR4	26
XOR2	27
XOR3	27
XOR4	28
XOR8	29
UJTAG	29
UJTAG_SEC	31
PF_SPI	33
SC_STATUS	34
BIBUF	35
BIBUF_DIFF	35
CLKBIBUF	36
CLKBUF	36

CLKBUF_DIFF	36
GCLKBUF	37
GCLKBUF_DIFF	37
INBUF	38
INBUF_DIFF	38
OUTBUF	39
OUTBUF_DIFF	39
TRIBUFF	40
TRIBUFF_DIFF	40
RAM1K20	41
RAM64x12	48
MACC_PA	51
MACC_PA_BC_ROM	57
Parameters	58
Appendix A: Revision History	62
Rev. A - 11/2020	62
The Microchip WebSite	63
Customer Change Notification Service	63
Customer Support	63

AND2

2-Input.

FIGURE 1: AND2




TABLE 1: AND2 I/O

Inputs	Output
A, B	Y

TABLE 2: AND2 TRUTH TABLE

A	B	Y
X	0	0
0	X	0
1	1	1

AND3

3-Input AND.

FIGURE 2: AND3




TABLE 3: AND3 I/O

Input	Output
A, B, C	Y

TABLE 4: AND3 TRUTH TABLE

A	B	C	Y
X	X	0	0
X	0	X	0
0	X	X	0
1	1	1	1

AND4

4-Input AND.

FIGURE 3: AND4




TABLE 5: AND4 I/O

Input	Output
A, B, C, D	Y

TABLE 6: AND4 TRUTH TABLE

A	B	C	D	Y
X	X	X	0	0
X	X	0	X	0
X	0	X	X	0
0	X	X	X	0
1	1	1	1	1

CFG1/2/3/4 AND LUTS (LOOK-UP TABLES)

CFG1, CFG2, CFG3, and CFG4 are post-layout LUTs (Look-up table) used to implement any 1-input, 2-input, 3-input, and 4-input combinational logic functions, respectively. Each of the CFG1/2/3/4 macros has an INIT string parameter that determines the logic functions of the macro. The output Y is dependent on the INIT string parameter and the values of the inputs.

CFG2

Post-layout macro used to implement any 2-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A and B. The INIT string parameter is 4 bits wide.

FIGURE 4: CFG2

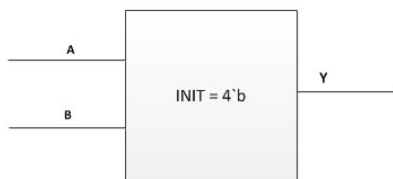


TABLE 7: CFG2 I/O

Input	Output
A,B	$Y = f(\text{INIT}, A, B)$

TABLE 8: CFG2 INIT STRING INTERPRETATION

BA	Y
00	INIT[0]
01	INIT[1]
10	INIT[2]
11	INIT[3]

CFG3

Post-layout macro used to implement any 3-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A,B, and C. The INIT string parameter is 8 bits wide.

FIGURE 5: CFG3

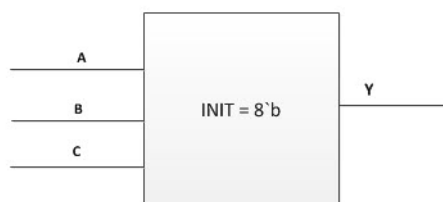


TABLE 9: CFG3 I/O

Input	Output
A, B, C	$Y = f(\text{INIT}, A, B, C)$

TABLE 10: CFG3 INIT STRING INTERPRETATION

CBA	Y
000	INIT[0]
001	INIT[1]
010	INIT[2]
011	INIT[3]
100	INIT[4]
101	INIT[5]
110	INIT[6]
111	INIT[7]

CFG4

Post-layout macro used to implement any 4-input combinational logic function. Output Y is dependent on the INIT string parameter and the value of A, B, C, and D. The INIT string parameter is 16 bits wide.

FIGURE 6: CFG4

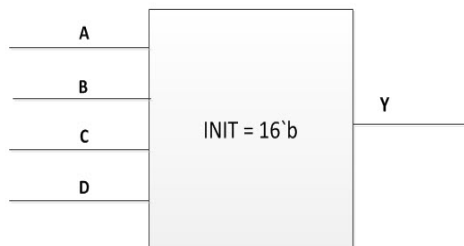


TABLE 11: CFG4 I/O

Input	Output
A, B, C, D	$Y = f(\text{INIT}, A, B, C, D)$

TABLE 12: CFG4 INIT STRING INTERPRETATION

DCBA	Y
0000	INIT[0]
0001	INIT[1]
0010	INIT[2]
0011	INIT[3]
0100	INIT[4]
0101	INIT[5]
0110	INIT[6]
0111	INIT[7]
1000	INIT[8]
1001	INIT[9]
1010	INIT[10]
1011	INIT[11]
1100	INIT[12]
1101	INIT[13]
1110	INIT[14]
1111	INIT[15]

BUFD

Buffer. Note that Compile optimization will not remove this macro.

FIGURE 7: BUFD




TABLE 13: BUFD I/O

Input	Output
A	Y

TABLE 14: BUFD TRUTH TABLE

A	Y
0	0
1	1

BUFF

Buffer.

FIGURE 8: BUFD




TABLE 15: BUFD I/O

Input	Output
A	Y

Truth Table

TABLE 16: BUFD TRUTH TABLE

A	Y
0	0
1	1

CLKINT

Macro used to route an internal fabric signal to global network.

FIGURE 9: CLKINT




TABLE 17: CLKINT I/O

Input	Output
A	Y

Truth Table

TABLE 18: CLKINT TRUTH TABLE

A	Y
0	0
1	1

CLKINT_PRESERVE

Macro used to route an internal fabric signal to global network. It has the same functionality as CLKINT except that this clock always stays on the global clock network and does not get demoted during design implementation.

FIGURE 10: CLKINT_PRESERVE




TABLE 19: CLKINT_PRESERVE I/O

Input	Output
A	Y

Truth Table

TABLE 20: CLKINT_PRESERVE TRUTH TABLE

A	Y
0	0
1	1

GCLKINT

Gated macro used to route an internal fabric signal to global network. The Enable signal can be used to turn off the global network to save power.

FIGURE 11: CLKINT_PRESERVE

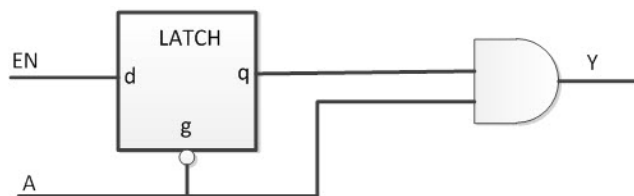


TABLE 21: CLKINT_PRESERVE I/O

Input	Output
A, EN	Y

TABLE 22: CLKINT_PRESERVE TRUTH TABLE

A	EN	q (Internal Signal)	Output
0	0	0	0
0	1	1	0
1	X	q	q

RCLKINT

Macro used to route an internal fabric signal to a row global buffer, thus creating a local clock.

FIGURE 12: RCLKINT




TABLE 23: RCLKINT I/O

Input	Output
A	Y

TABLE 24: RCLKINT TRUTH TABLE

A	Y
0	0
1	1

RGCLKINT

Gated macro used to route an internal fabric signal to a row global buffer, thus creating a local clock. The Enable signal can be used to turn off the local clock to save power.

FIGURE 13: RCLKINT

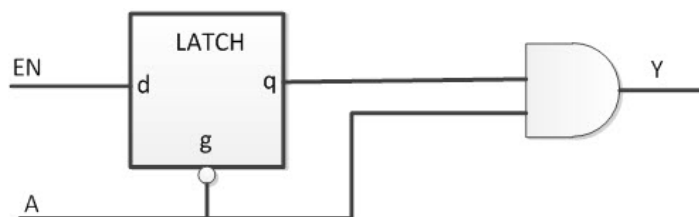


TABLE 25: RCLKINT I/O

Input	Output
A, EN	Y

Truth Table

TABLE 26: RCLKINTI TRUTH TABLE

A	EN	q (Internal Signal)	Output
0	0	0	0
0	1	1	0
1	X	q	q

SLE

Sequential Logic Element.

FIGURE 14: SLE

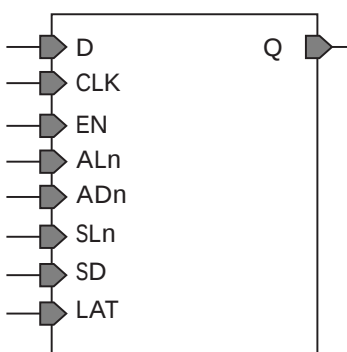


TABLE 27: SLE I/O

Input		Output
Name	Function	Q
D	Data	
CLK	Clock	
EN	Enable	
ALn	Asynchronous Load (Active Low)	
ADn*	Asynchronous Data (Active Low)	
SLn	Synchronous Load (Active Low)	
SD*	Synchronous Data	
LAT*	Latch Enable	

Note: ADn, SD, and LAT are static signals defined at design time and need to be tied to 0 or 1.

TABLE 28: SLE TRUTH TABLE

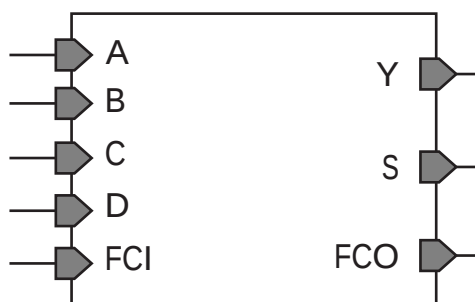
ALn	ADn	LAT	CLK	EN	SLn	SD	D	Q _{n+1}
0	ADn	X	X	X	X	X	X	!ADn
1	X	0	Not rising	X	X	X	X	Qn
1	X	0	-	0	X	X	X	Qn
1	X	0	-	1	0	SD	X	SD
1	X	0	-	1	1	X	D	D

TABLE 28: SLE TRUTH TABLE (CONTINUED)

ALn	ADn	LAT	CLK	EN	SLn	SD	D	Q _{n+1}
1	X	1	0	X	X	X	X	Q _n
1	X	1	1	0	X	X	X	Q _n
1	X	1	1	1	0	SD	X	SD
1	X	1	1	1	1	X	D	D

ARI1

The ARI1 macro is responsible for representing all arithmetic operations in the pre-layout phase.

FIGURE 15: ARI1**TABLE 29: ARI1 I/O**

Input	Output
A, B, C, D, FCI	Y, S, FCO

The ARI1 cell has a 20bit INIT string parameter that is used to configure its functionality. The interpretation of the 16 LSB of the INIT string is shown in the following table. F0 is the value of Y when A = 0 and F1 is the value of Y when A = 1.


TABLE 30: INTERPRETATION OF 16 LSB OF THE INIT STRING FOR ARI1

ADCB	Y	
0000	INIT[0]	F0
0001	INIT[1]	
0010	INIT[2]	
0011	INIT[3]	
0100	INIT[4]	
0101	INIT[5]	
0110	INIT[6]	
0111	INIT[7]	
1000	INIT[8]	F1
1001	INIT[9]	
1010	INIT[10]	
1011	INIT[11]	
1100	INIT[12]	
1101	INIT[13]	
1110	INIT[14]	
1111	INIT[15]	

TABLE 31: TRUTH TABLE FOR S

Y	FCI	S
0	0	0
0	1	1
1	0	1
1	1	0

FIGURE 16: ARI1 LOGIC

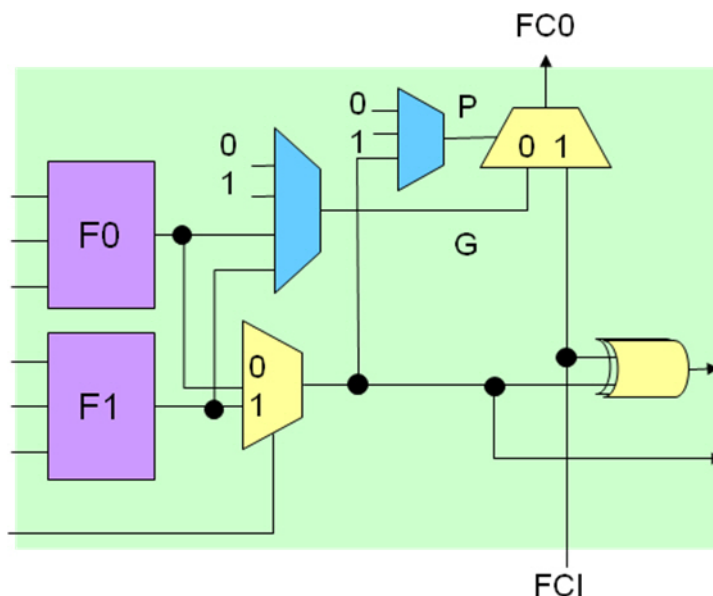

The 4 MSB of the INIT string controls the output of the carry bits. The carry is generated using carry propagation and generation bits, which are evaluated according to the following tables.

TABLE 32: ARI1 INIT[17:16] STRING INTERPRETATION

INIT[17]	INIT[16]	G
0	0	0
0	1	F0
1	0	1
1	1	F1

TABLE 33: ARI1 INIT[19:18] STRING INTERPRETATION

INIT[19]	INIT[18]	P
0	0	0
0	1	Y
1	X	1

FCEND_BUFF

Buffer, driven by the FCO pin of the last macro in the Carry-Chain.

FIGURE 17: FCEND_BUFF




TABLE 34: FCEND_BUFF I/O

Input	Output
A	Y

TABLE 35: FCEND_BUFF TRUTH TABLE

A	Y
0	0
1	1

FCINIT_BUFF

Buffer, used to initialize the FCI pin of the first macro in the Carry-Chain.

FIGURE 18: FCINIT_BUFF




TABLE 36: FCINIT_BUFF I/O

Input	Output
A	Y

TABLE 37: FCINIT_BUFF TRUTH TABLE

A	Y
0	0
1	1

DFN1

D-Type Flip-Flop.

FIGURE 19: DFN1




TABLE 38: DFN1 I/O

Input	Output
D, CLK	Q

TABLE 39: DFN1 TRUTH TABLE

CLK	D	Q_{n+1}
Not Rising	X	Q_n
-	D	D

DFN1C0

D-Type Flip-Flop with active low Clear.

FIGURE 20: DFN1C0




TABLE 40: DFN1C0

Input	Output
D, CLK, CLR	Q

TABLE 41: DFN1C0 TRUTH TABELLE

CLR	CLK	D	Q_{n+1}
0	X	X	0
1	not Rising	X	Q_n
1	-	D	D

DFN1E1

D-Type Flip-Flop with active high Enable.

FIGURE 21: DFN1E1




TABLE 42: DFN1E1 I/O

Input	Output
D, E, CLK	Q

TABLE 43: DFN1E1 TRUTH TABLE

E	CLK	D	Q_{n+1}
0	X	X	Q_n
1	not Rising	X	Q_n
1	-	D	D

DFN1E1C0

D-Type Flip-Flop, with active high Enable and active low Clear.

FIGURE 22: DFN1E1C0




TABLE 44: DFN1E1C0 I/O

Input	Output
CLR, D, E, CLK	Q

TABLE 45: DFN1E1C0 TRUTH TABLE

CLR	E	CLK	D	Q_{n+1}
0	X	X	X	0
1	0	X	X	Q_n
1	1	not Rising	X	Q_n
1	1	-	D	D

DFN1E1P0

D-Type Flip-Flop with active high Enable and active low Preset.

FIGURE 23: DFN1E1P0




TABLE 46: DFN1E1P0 I/O

Input	Output
D, E, PRE, CLK	Q

TABLE 47: DFN1E1P0 TRUTH TABLE

PRE	E	CLK	D	Q_{n+1}
0	X	X	X	1
1	0	X	X	Q_n
1	1	not Rising	X	Q_n
1	1	-	D	D

DFN1P0

D-Type Flip-Flop with active low Preset.

FIGURE 24: DFN1P0




TABLE 48: DFN1P0 I/O

Input	Output
D, PRE, CLK	Q

TABLE 49: DFN1P0 TRUTH TABLE

PRE	CLK	D	Q_{n+1}
0	X	X	1
1	not Rising	X	Q_n
1	-	D	D

DLN1

Data Latch.

FIGURE 25: DLN1




TABLE 50: DLN1 I/O

Input	Output
D, G	Q

TABLE 51: DLN1 TRUTH TABLE

G	D	Q
0	X	Q
1	D	D

DLN1C0

Data Latch with active low Clear.

FIGURE 26: DLN1C0




TABLE 52: DLN1C0 I/O

Input	Output
CLR, D, G	Q

TABLE 53: DLN1C0 TRUTH TABLE

CLR	G	D	Q
0	X	X	0
1	0	X	Q
1	1	D	D

DLN1P0

Data Latch with active low Preset.

FIGURE 27: DLN1P0




TABLE 54: DLN1P0 I/O

Input	Output
D, G, PRE	Q

TABLE 55: DLN1P0 TRUTH TABLE

PRE	G	D	Q
0	X	X	1
1	0	X	Q
1	1	D	D

INV

Inverter.

FIGURE 28: INV




TABLE 56: INV I/O

Input	Output
A	Y

TABLE 57: INV TRUTH TABLE

A	Y
0	1
1	0

INVD

Inverter; note that Compile optimization will not remove this macro.

FIGURE 29: INVD




TABLE 58: INVD I/O

Input	Output
A	Y

TABLE 59: INVD TRUTH TABLE

A	Y
0	1
1	0

MX2

2 to 1 Multiplexer.

FIGURE 30: MX2




TABLE 60: MX2 I/O

Input	Output
A, B, S	Y

TABLE 61: MX2 TRUTH TABLE

A	B	S	Y
A	X	0	A
X	B	1	B

MX4

4 to 1 Multiplexer.

This macro uses two logic modules.

FIGURE 31: MX4




TABLE 62: MX4 I/O

Input	Output
D0, D1, D2, D3, S0, S1	Y

TABLE 63: MX4 TRUTH TABLE

D3	D2	D1	D0	S1	S0	Y
X	X	X	D0	0	0	D0
X	X	D1	X	0	1	D1
X	D2	X	X	1	0	D2
D3	X	X	X	1	1	D3

NAND2

2-Input NAND.

FIGURE 32: NAND2




TABLE 64: NAND2 I/O

Input	Output
A, B	Y

TABLE 65: NAND2 TRUTH TABLE

A	B	Y
X	0	1
0	X	1
1	1	0

NAND3

3-Input NANDA.

FIGURE 33: NAND3




TABLE 66: NAND3 I/O

Input	Output
A, B, C	Y

TABLE 67: NAND3 TRUTH TABLE

A	B	C	Y
X	X	0	1
X	0	X	1
0	X	X	1
1	1	1	0

NAND4

4-input NAND.

FIGURE 34: NAND4




TABLE 68: NAND4 I/O

Input	Output
A, B, C, D	Y

TABLE 69: NAND4 TRUTH TABLE

A	B	C	D	Y
X	X	X	0	1
X	X	0	X	1
X	0	X	X	1
0	X	X	X	1
1	1	1	1	0

NOR2

2-input NOR.

FIGURE 35: NOR2




TABLE 70: NOR2 I/O

Input	Output
A, B	Y

TABLE 71: NOR2 TRUTH TABLE

A	B	Y
0	0	1
X	1	0
1	X	0

NOR3

3-input NOR.

FIGURE 36: NOR3




TABLE 72: NOR3 I/O

Input	Output
A, B, C	Y

TABLE 73: NOR3 TRUTH TABLE

A	B	C	Y
0	0	0	1
X	X	1	0
X	1	X	0
1	X	X	0

NOR4

4-input NOR.

FIGURE 37: NOR4




TABLE 74: NOR4 I/O

Input	Output
A, B, C, D	Y

TABLE 75: NOR4 TRUTH TABLE

A	B	C	D	Y
0	0	0	0	1
1	X	X	X	0
X	1	X	X	0
X	X	1	X	0
X	X	X	1	0

OR2

2-input OR.

FIGURE 38: OR2




TABLE 76: OR2 I/O

Input	Output
A, B	Y

TABLE 77: OR2 TRUTH TABLE

A	B	Y
0	0	0
X	1	1
1	X	1

OR3

3-input OR.

FIGURE 39: OR3




TABLE 78: OR3 I/O

Input	Output
A, B, C	Y

TABLE 79: OR3 TRUTH TABLE

A	B	C	Y
0	0	0	0
X	X	1	1
X	1	X	1
1	X	X	1

OR4

4-input OR.

FIGURE 40: OR4




TABLE 80: OR4 I/O

Input	Output
A, B, C, D	Y

TABLE 81: OR4 TRUTH TABLE

A	B	C	D	Y
0	0	0	0	0
1	X	X	X	1
X	1	X	X	1
X	X	1	X	1
X	X	X	1	1

XOR2

2-input XOR.

FIGURE 41: XOR2




TABLE 82: XOR2 I/O

Input	Output
A, B	Y

TABLE 83: XOR2 TRUTH TABLE

A	B	Y
0	0	0
0	1	1
1	0	1
1	1	0

XOR3

3-input XOR.

FIGURE 42: XOR3




TABLE 84: XOR3 I/O

Input	Output
A, B, C	Y

TABLE 85: XOR3 TRUTH TABLE

A	B	C	Y
0	0	0	0
1	0	0	1
0	1	0	1
1	1	0	0
0	0	1	1
1	0	1	0
0	1	1	0
1	1	1	1

XOR4

4-input XOR.

FIGURE 43: XOR4




TABLE 86: XOR4 I/O

Input	Output
A, B, C, D	Y

TABLE 87: XOR4 TRUTH TABLE

A	B	C	D	Y
0	0	0	0	0
0	0	0	1	1
0	0	1	0	1
0	0	1	1	0
0	1	0	0	1
0	1	0	1	0
0	1	1	0	0
0	1	1	1	1


TABLE 87: XOR4 TRUTH TABLE (CONTINUED)

A	B	C	D	Y
1	0	0	0	1
1	0	0	1	0
1	0	1	0	0
1	0	1	1	1
1	1	0	0	0
1	1	0	1	1
1	1	1	0	1
1	1	1	1	0

XOR8

8-input XOR.

This macro uses two logic modules.

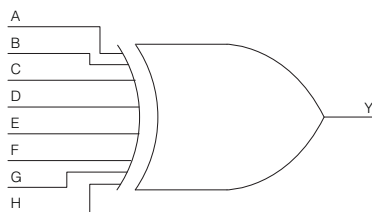FIGURE 44: XOR8**TABLE 88: XOR8 I/O**

Input	Output
A, B, C, D, E, F, G, H	Y

If you have an odd number of inputs that are High, the output is High (1).

If you have an even number of inputs that are High, the output is Low (0).

For example:

TABLE 89: XOR8 TRUTH TABLE

A	B	C	D	E	F	G	H	Y
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	1	1
0	0	0	0	0	0	1	1	0

UJTAG

The UJTAG macro is a special purpose macro. It allows access to the user JTAG circuitry on board the chip.

You must instantiate a UJTAG macro in your design if you plan to make use of the user JTAG feature. The TMS, TDI, TCK, TRSTB and TDO pins of the macro must be connected to top level ports of the design.

FIGURE 45: UJTAG

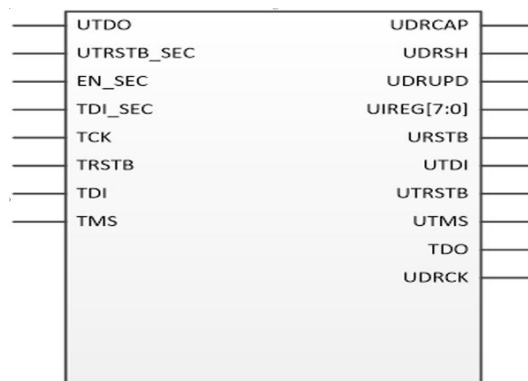


TABLE 90: PORTS AND DESCRIPTIONS

Port	Direction	Polarity	Description
UIREG[7:0]	Output	—	This 8-bit bus carries the contents of the JTAG instruction register of each device. Instruction values 16 to 127 are not reserved and can be employed as user-defined instructions.
URSTB	Output	Low	URSTB is an Active Low signal and is asserted when the TAP controller is in Test-Logic-Reset mode. URSTB is asserted at power-up, and a power-on reset signal resets the TAP controller state.
UTDI	Output	—	This port is directly connected to the TAP's TDI signal.
UTDO	Input	—	This port is the user TDO output. Inputs to the UTDO port are sent to the TAP TDO output MUX when the IR address is in user range.
UDRSH	Output	High	Active High signal enabled in the Shift_DR TAP state.
UDRCAP	Output	High	Active High signal enabled in the Capture_DR_TAP state.
UDRCK	Output	—	This port is directly connected to the TAP's TCK signal. Note: UDRCK must be connected to a global macro such as CLKINT. If this is not done, Synthesis/Compile will add it to the netlist to legalize it.
UDRUPD	Output	High	Active High signal enabled in the Update_DR_TAP state.
TCK	Input	—	Test Clock. Serial input for JTAG boundary scan, ISP, and UJTAG. The TCK pin does not have an internal pull-up/pull-down resistor. Connect TCK to GND or +3.3 V through a resistor (500-1 K Ω) placed closed to the FPGA pin to prevent totem-pole current on the input buffer and TMS from entering into an undesired state. If JTAG is not used, connect it to GND.
TDI	Input	—	Test Data In. Serial input for JTAG boundary scan. There is an internal weak pull-up resistor on the TDI pin.

TABLE 90: PORTS AND DESCRIPTIONS (CONTINUED)

Port	Direction	Polarity	Description
TDO	Output	—	Test Data Out. Serial output for JTAG boundary scan. The TDO pin does not have an internal pull-up/pull-down resistor.
TMS	Input	—	Test mode select. The TMS pin controls the use of the IEEE1532 boundary scan pins (TCK, TDI, TDO, and TRST). There is an internal weak pull-up resistor on the TMS pin.
TRSTB	Input	Low	Test reset. The TRSTB pin is an active low input. It synchronously initializes (or resets) the boundary scan circuitry. There is an internal weak pull-up resistor on the TRSTB pin. To hold the JTAG in reset mode and prevent it from entering into undesired states in critical applications, connect TRSTB to GND through a 1 K Ω resistor (placed close to the FPGA pin).

UJTAG_SEC

The UJTAG_SEC macro is a special purpose macro. It allows access to the user JTAG circuitry on board the chip.

You must instantiate a UJTAG_SEC macro in your design if you plan to make use of the user JTAG feature. The TMS, TDI, TCK, TRSTB, and TDO pins of the macro must be connected to top level ports of the design.

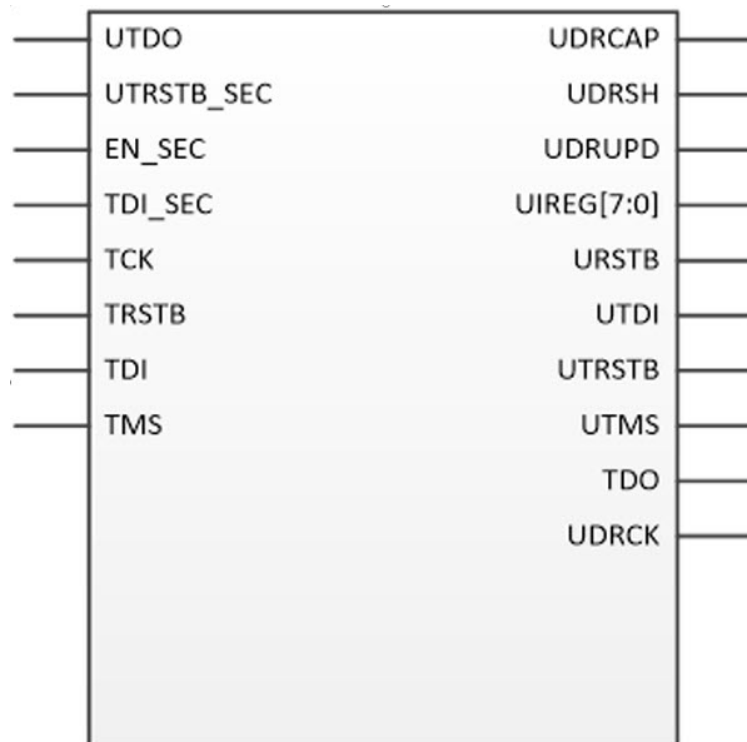
FIGURE 46: UJTAG_SEC

TABLE 91: PORTS AND DESCRIPTIONS

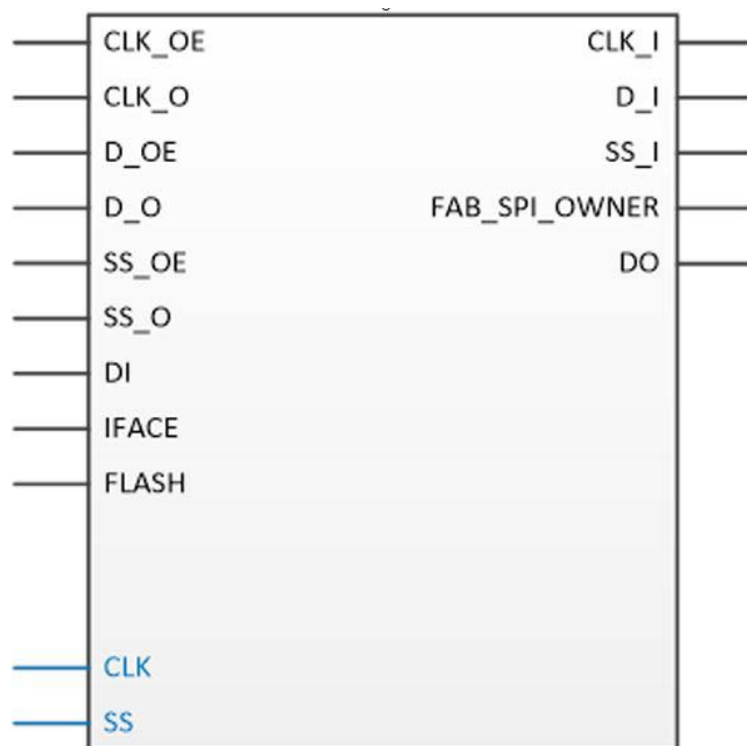
Port	Direction	Polarity	Description
UIREG[7:0]	Output	—	This 8-bit bus carries the contents of the JTAG instruction register of each device. Instruction values 16 to 127 are not reserved and can be employed as user-defined instructions.
URSTB	Output	Low	URSTB is an Active Low signal and is asserted when the TAP controller is in Test-Logic-Reset mode. URSTB is asserted at power-up, and a power-on reset signal resets the TAP controller state.
UTDI	Output	—	This port is directly connected to the TAP's TDI signal.
UTDO	Input	—	This port is the user TDO output. Inputs to the UTDO port are sent to the TAP TDO output MUX when the IR address is in user range.
UDRSH	Output	High	Active High signal enabled in the Shift_DR TAP state.
UDRCAP	Output	High	Active High signal enabled in the Capture_DR_TAP state.
UDRCK	Output	—	This port is directly connected to the TAP's TCK signal. Note: UDRCK must be connected to a global macro such as CLKINT. If this is not done, Synthesis/Compile will add it to the netlist to legalize it.
UDRUPD	Output	High	Active High signal enabled in the Update_DR_TAP state.
TCK	Input	—	Test Clock. Serial input for JTAG boundary scan, ISP, and UJTAG. The TCK pin does not have an internal pull-up/pull-down resistor. Connect TCK to GND or +3.3 V through a resistor (500-1 K Ω) placed close to the FPGA pin to prevent totem-pole current on the input buffer and TMS from entering into an undesired state. If JTAG is not used, connect it to GND.
TDI	Input	—	Test Data In. Serial input for JTAG boundary scan. There is an internal weak pull-up resistor on the TDI pin.
TDO	Output	—	Test Data Out. Serial output for JTAG boundary scan. The TDO pin does not have an internal pull-up/pull-down resistor.
TMS	Input	—	Test mode select. The TMS pin controls the use of the IEEE1532 boundary scan pins (TCK, TDI, TDO, and TRST). There is an internal weak pull-up resistor on the TMS pin.
TRSTB	Input	Low	Test reset. The TRSTB pin is an active low input. It synchronously initializes (or resets) the boundary scan circuitry. There is an internal weak pull-up resistor on the TRSTB pin. To hold the JTAG in reset mode and prevent it from entering into undesired states in critical applications, connect TRSTB to GND through a 1 K Ω resistor (placed close to the FPGA pin).

TABLE 91: PORTS AND DESCRIPTIONS (CONTINUED)

Port	Direction	Polarity	Description
EN_SEC	Input	High	Enable Security. Enables the user design to override the external TDI and TRSTB input to the TAP. Need to tie LOW in the design when not used.
TDI_SEC	Input	—	TDI Security override. Overrides the external TDI input to the TAP when SEC_EN is HIGH.
TRSTB_SEC	Input	Low	TRSTB Security override. Overrides the external TRSTB input to the TAP when SEC_EN is HIGH.

PF_SPI

The PF_SPI macro allows your design access to the dedicated System Controller SPI port, when SPI-Master mode is enabled, by tying both SC_SPI_EN and IO_CFG_INTF to high.

FIGURE 47: PF_SPI**TABLE 92: PORTS AND DESCRIPTIONS**


Port	Direction	Polarity	Description
D_I	Output	—	This port is connected to the SPI DI pin.
FAB_SPI_OWNER	Output	High	Indicator to the Fabric SPI-Master if the SPI Port is available.
CLK_OE	Input	High	Enables the SPI CLK output.
CLK_O	Input	—	This port drives the SPI Clock pin. CLK_OE must be HIGH to drive.
D_OE	Input	High	Enables the Data output.

TABLE 92: PORTS AND DESCRIPTIONS (CONTINUED)

Port	Direction	Polarity	Description
D_O	Input	—	This port drives the SPI DO pin. D_OE must be HIGH to drive.
SS_OE	Input	High	Enables the Slave Select output.
SS_O	Input	High	This port drives the SPI Slave Select (SS) pin. SS_OE must be HIGH to drive.
CLK	Output	—	SPI Clock output pin.
DI	Input	—	SPI Serial Data input pin.
DO	Output	—	SPI Serial Data output pin.
SS	Output	High	SPI Slave Select output pin.
IFACE	Input	High	This port is mapped to the IO_CFG_INTF pin. This pin must be tied to high together with the SC_SPI_EN pin to enable SPI port for the fabric macro to work.
FLASH	Input	High	This port is mapped to the SC_SPI_EN pin. This pin must be tied to high together with the IO_CFG_INTF pin to enable the SPI port for fabric macro to work.

SC_STATUS

In the SC_STATUS macro, SUSPEND_EN signal is used to indicate that the device is in avionics mode. It means that device initialization is complete and all hardware forcing to default values is in place.

FIGURE 48: SC_STATUS**TABLE 93: SC_STATUS I/O**

Value	Description
0	The device is not in avionics mode.
1	The device is in avionics mode.

For ACTIVE signal, if SC is in suspend mode, ACTIVE signal should not be asserted.

TABLE 94: PORTS AND DESCRIPTIONS

Port	On Masterf			On Slave			Description
	Presence	Width	Direction	Presence	Width	Direction	
SUSPEND_EN	Required	1	Output	Required	1	Input	Asserted when SC is in suspend mode.
ACTIVE	Required	1	Output	Required	1	Input	Asserted when SC is in active mode.

BIBUF

Bidirectional Buffer.

FIGURE 49: BIBUF




TABLE 95: BIBUF I/O

Input	Output
D, E, PAD	PAD, Y

TABLE 96: BIBUF TRUTH TABLE

MODE	E	D	PAD	Y
OUTPUT	1	D	D	D
INPUT	0	X	Z	X
INPUT	0	X	PAD	PAD

BIBUF_DIFF

Bidirectional Buffer, Differential I/O.

Figure 1 • BIBUF_DIFF




TABLE 97: BIBUF_DIFF I/O

Input	Output
D, E, PADP, PADN	PADP, PADN, Y

TABLE 98: BIBUF_DIFF TRUTH TABLE

MODE	E	D	PADP	PADN	Y
OUTPUT	1	0	0	1	0
OUTPUT	1	1	1	0	1
INPUT	0	X	Z	Z	X
INPUT	0	X	0	0	X
INPUT	0	X	1	1	X
INPUT	0	X	0	1	0
INPUT	0	X	1	0	1

CLKBIBUF

Bidirectional Buffer with Input to global network.

Figure 2 • CLKBIBUF




TABLE 99: CLKBIBUF I/O

Input	Output
D, E, PAD	PAD, Y

TABLE 100: CLKBIBUF TRUTH TABLE

D	E	PAD	Y
X	0	Z	X
X	0	0	0
X	0	1	1
0	1	0	0
1	1	1	1

CLKBUF

Input Buffer to global network.

Figure 3 • CLKBUF




TABLE 101: CLKBUF I/O

Input	Output
PAD	Y

TABLE 102: CLKBUF TRUTH TABLE

PAD	Y
0	0
1	1

CLKBUF_DIFF

Differential I/O macro to global network, Differential I/O.

Figure 4 • INBUF_DIFF




TABLE 103: CLKBUF_DIFF I/O

Input	Output
PADP, PADN	Y

TABLE 104: CLKBUF_DIFF TRUTH TABLE

PADP	PADN	Y
Z	Z	Y
0	0	X
1	1	X
0	1	0
1	0	1

GCLKBUF

Gated input I/O macro to global network; the Enable signal can be used to turn off the global network to save power.

Figure 5 • GCLKBUF

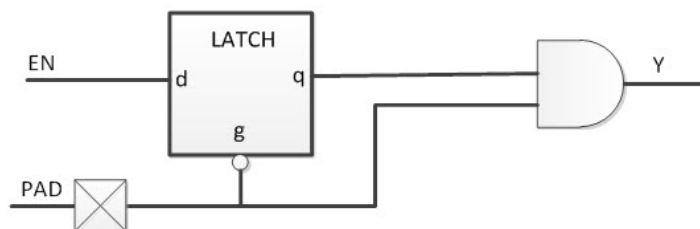


TABLE 105: GCLKBUF I/O

Input	Output
PAD, EN	Y


TABLE 106: GCLKBUF TRUTH TABLE

PAD	EN	q	Y
0	0	0	0
0	1	1	0
1	X	q	q
Z	X	X	X

GCLKBUF_DIFF

Gated differential I/O macro to global network; the Enable signal can be used to turn off the global network.

Figure 6 • GCLKBUF_DIFF

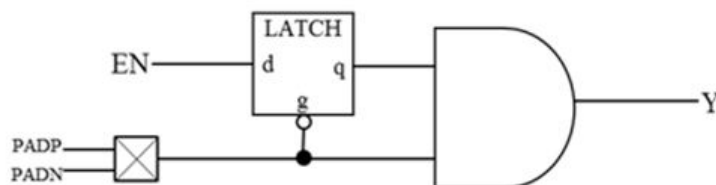

Differential

TABLE 107: GCLKBUF_DIFF I/O

Input	Output
PADP, PADN, EN	Y

TABLE 108: GCLKBUF_DIFF TRUTH TABLE

PADP	PADN	EN	q	Y
0	1	0	0	0
0	1	1	1	0
1	0	X	q	q
0	0	X	X	X
1	1	X	X	X
Z	Z	X	X	X

INBUF

Input Buffer.

Figure 7 • INBUF




TABLE 109: INBUF I/O

Input	Output
PAD	Y

TABLE 110: INBUF TRUTH TABLE

PAD	Y
Z	X
0	0
1	1

INBUF_DIFF

Input Buffer, Differential I/O.

Figure 8 • INBUF_DIFF




TABLE 111: INBUF_DIFF I/O

Input	Output
PADP, PADN	Y

TABLE 112: INBUF_DIFF TRUTH TABLE

PADP	PADN	Y
Z	Z	X
0	0	X
1	1	X
0	1	0
1	0	1

OUTBUF

Output buffer.

Figure 9 • OUTBUF




TABLE 113: OUTBUF I/O

Input	Output
D	PAD

TABLE 114: OUTBUF TRUTH TABLE

D	PAD
0	0
1	1

OUTBUF_DIFF

Output buffer, Differential I/O.

Figure 10 • OUTBUF_DIFF




TABLE 115: OUTBUF_DIFF I/O

Input	Output
D	PADP, PADN

TABLE 116: OUTBUF_DIFF TRUTH TABLE

D	PADP	PADN
0	0	1
1	1	0

TRIBUFF

Tristate output buffer.

Figure 11 • TRIBUFF




TABLE 117: TRIBUFF I/O

Input	Output
D, E	PAD

TABLE 118: TRIBUFF TRUTH TABLE

D	E	PAD
X	0	Z
D	1	D

TRIBUFF_DIFF

Tristate output buffer, Differential I/O.

Figure 12 • TRIBUFF_DIFF




TABLE 119: TRIBUFF_DIFF I/O

Input	Output
D, E	PADP, PADN

TABLE 120: TRIBUFF_DIFF TRUTH TABLE

D	E	PADP	PADN
X	0	Z	Z
0	1	0	1
1	1	1	0

RAM1K20

The RAM1K20 block contains 20,480 (16,896 with ECC) memory bits and is a true dual-port memory. The RAM1K20 memory can also be configured in two-port mode. All read/write operations to the RAM1K20 memory are synchronous. To improve the read-data delay, an optional pipeline register at the output is available. In addition to the feed-through write mode option to enable immediate access to the write-data, RAM1K20 has a Read-before-write option in the dual-port mode. RAM1K20 also includes a Read-enable control for both dual-port and two-port modes. The RAM1K20 memory has two data ports, which can be independently configured in any of the following combination.

- Non-ECC Dual-Port RAM with the following configurations:
 - Any of 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1 on each port
- Non-ECC Two-Port RAM with the following configurations:
 - Any of 512x40, 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1 on each port
- ECC Two-Port RAM with the following configuration:
 - 512x33 on both ports

Functionality

The main features of the RAM1K20 memory block are as follows:

- A RAM1K20 block has 16,896 bits with ECC and 20,480 bits without ECC.
- A RAM1K20 block provides two independent data ports A and B.
- In non-ECC dual-port mode, each port can be independently configured to any of the following depth/width: 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1. There are 25 unique combinations of non-ECC dual-port aspect ratios:

1Kx20/1Kx20	1Kx20/2Kx10	1Kx20/4Kx5	1Kx16/8Kx2	1Kx16/16Kx1
2Kx10/1Kx20	2Kx10/2Kx10	2Kx10/4Kx5	2Kx8/8Kx2	2Kx8/16Kx1
4Kx5/1Kx20	4Kx5/2Kx10	4Kx5/4Kx5	4Kx4/8Kx2	4Kx4/16Kx1
8Kx2/1Kx16	8Kx2/2Kx8	8Kx2/4Kx4	8Kx2/8Kx2	8Kx2/16Kx1
16Kx1/1Kx16	16Kx1/2Kx8	16Kx1/4Kx4	16Kx1/8Kx2	16Kx1/16Kx1

- RAM1K20 also has a two-port mode. In this case, Port A will become the read port and Port B becomes the write port.
- In non-ECC two-port mode, each port can be independently configured to any of the following depth/width: 512x40, 1Kx20, 2Kx10, 4Kx5, 8Kx2 or 16Kx1. There are 36 unique combinations of non-ECC two-port aspect ratios:

512x40/512x40	512x40/1Kx20	512x40/2Kx10	512x40/4Kx5	512x32/8Kx2	512x32/16Kx1
1Kx20/512x40	1Kx20/1Kx20	1Kx20/2Kx10	1Kx20/4Kx5	1Kx16/8Kx2	1Kx16/16Kx1
2Kx10/512x40	2Kx10/1Kx20	2Kx10/2Kx10	2Kx10/4Kx5	2Kx8/8Kx2	2Kx8/16Kx1
4Kx5/512x40	4Kx5/1Kx20	4Kx5/2Kx10	4Kx5/4Kx5	4Kx4/8Kx2	4Kx4/16Kx1
8Kx2/512x32	8Kx2/1Kx16	8Kx2/2Kx8	8Kx2/4Kx4	8Kx2/8Kx2	8Kx2/16Kx1
16Kx1/512x32	16Kx1/1Kx16	16Kx1/2Kx8	16Kx1/4Kx4	16Kx1/8Kx2	16Kx1/16Kx1

- RAM1K20 has an ECC two-port mode, for which both ports have word widths equal to 33 bits. There is one unique combination of ECC two-port aspect ratio:
 - 512x33/512x33
- RAM1K20 performs synchronous operation for setting up the address as well as writing and reading the data.
- RAM1K20 has a Read-enable control for both dual-port and two-port modes.
- The address, data, block-port select, write-enable and read-enable inputs are registered.
- An optional pipeline register with a separate enable, synchronous-reset and asynchronous-reset is available at the read-data port to improve the clock-to-out delay.
- There is an independent clock for each port. The memory is triggered at the rising edge of the clock.
- The true dual-port mode supports an optional Read-before-write mode or a feed-through write mode, where the

- write-data also appears on the corresponding read-data port.
- Read from both ports at the same location is allowed.
 - Read and write on the same location at the same time results in unknown data to be read. **There is no collision prevention or detection.** However, correct data is expected to be written into the memory.
 - When ECC is enabled, each port of the RAM1K20 memory can raise flags to indicate single-bit-correct and double-bit-detect.

Figure 50 shows a simplified block diagram of the RAM1K20 memory block. The simplified block illustrates the two independent data ports, ECC, the read-data pipeline registers, read-before-write selection, and the feed-through multiplexers.

FIGURE 50: SIMPLIFIED BLOCK DIAGRAM OF RAM1K20

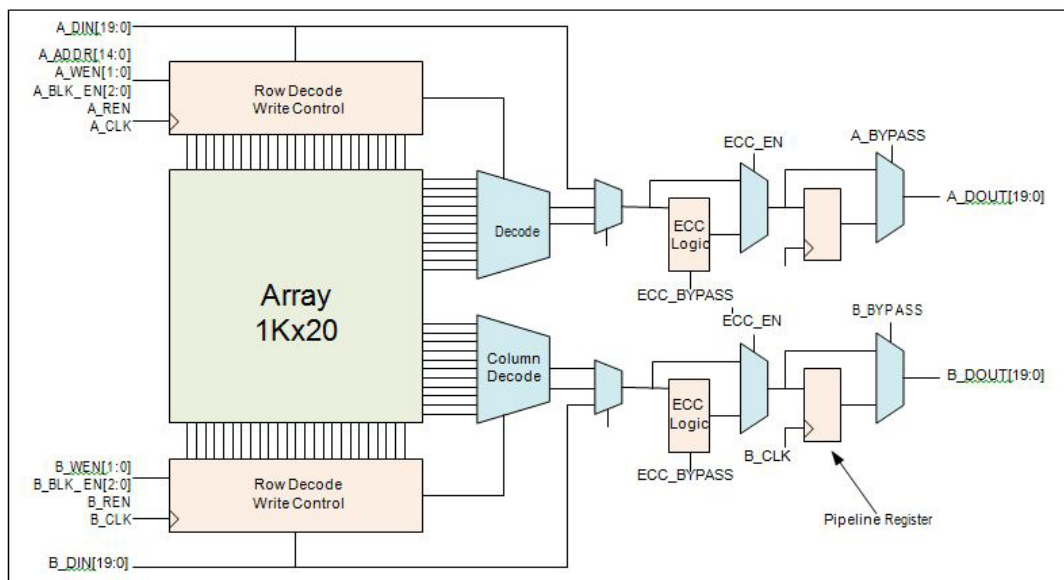


TABLE 121: PORT LIST FOR RAM1K20

Pin Name	Pin Direction	Type ¹	Description	Polarity
A_ADDR[13:0]	Input	Dynamic	Port A address	
A_BLK_EN[2:0]	Input	Dynamic	Port A block selects	High
A_CLK	Input	Dynamic	Port A clock	Rising
A_DIN[19:0]	Input	Dynamic	Port A write-data	—
A_DOUT[19:0]	Output	Dynamic	Port A read-data	—
A_WEN[1:0]	Input	Dynamic	Port A write-enables (per byte)	High
A_REN	Input	Dynamic	Port A read-enable	High
A_WIDTH[2:0]	Input	Static	Port A width/depth mode select	—
A_WMODE[1:0]	Input	Static	Port A Read-before-write and Feed-through write selects	High
A_BYPASS	Input	Static	Port A pipeline register select	Low
A_DOUT_EN	Input	Dynamic	Port A pipeline register enable	High
A_DOUT_SRST_N	Input	Dynamic	Port A pipeline register synchronous-reset	Low
A_DOUT_ARST_N	Input	Dynamic	Port A pipeline register asynchronous-reset	Low
B_ADDR[13:0]	Input	Dynamic	Port B address	—
B_BLK_EN[2:0]	Input	Dynamic	Port B block selects	High
B_CLK	Input	Dynamic	Port B clock	Rising
B_DIN[19:0]	Input	Dynamic	Port B write-data	—
B_DOUT[19:0]		Dynamic	Port B read-data	—
B_WEN[1:0]	Input	Dynamic	Port B write-enables (per byte)	High
B_REN	Input	Dynamic	Port B read-enable	High
B_WIDTH[2:0]	Input	Static	Port B width/depth mode select	—
B_WMODE[1:0]	Input	Static	Port B Read-before-write and Feed-through write selects	High
B_BYPASS	Input	Static	Port B pipeline register select	Low
B_DOUT_EN	Input	Dynamic	Port B pipeline register enable	High
B_DOUT_SRST_N	Input	Dynamic	Port B pipeline register synchronous-reset	Low
B_DOUT_ARST_N	Input	Dynamic	Port B pipeline register asynchronous-reset	Low
ECC_EN	Input	Static	Enable ECC	High
ECC_BYPASS	Input	Static	ECC pipeline register select	Low
SB_CORRECT	Output	Dynamic	Single-bit correct flag	High
DB_DETECT	Output	Dynamic	Double-bit detect flag	High
BUSY_FB	Input	Static	Lock access to FCB	High
ACCESS_BUSY	Output	Dynamic	Busy signal from FCB	High

Static inputs are defined at design time and need to be tied to 0 or 1.

A_WIDTH and B_WIDTH

Table 122 lists the width/depth mode selections for each port. Two-port mode is in effect when the width of at least one port is greater than 20, and A_WIDTH indicates the read width while B_WIDTH indicates the write width.

TABLE 122: WIDTH/DEPTH MODE SELECTION

Depth x Width	A_WIDTH/B_WIDTH
16Kx1	000
8Kx2	001
4Kx4, 4Kx5	010
2Kx8, 2Kx10	011
1Kx16, 1Kx20	100
512x32 (Two-port), 512x40 (Two-port), 512x33 (Two-port ECC)	101

A_WEN and B_WEN

Table 123 lists the write/read control signals for each port. Two-port mode is in effect when the width of at least one port is greater than 20, and read operation is always enabled.

TABLE 123: WRITE/READ OPERATION SELECT

Depth x Width	A_WEN/B_WEN	Result
16Kx1, 8Kx2, 4Kx5, 2Kx10	x0	Perform a read operation
	x1	Perform a write operation
1Kx16	00	Perform a read operation
	01	Write [8:5], [3:0]
	10	Write [18:15], [13:10]
	11	Write [18:15], [13:10], [8:5], [3:0]
1Kx20	00	Perform a read operation
	01	Write [9:0]
	10	Write [19:10]
	11	Write [19:0]
512x32 (Two-port write)	B_WEN[0] = 1	Write B_DIN[8:5], B_DIN[3:0]
	B_WEN[1] = 1	Write B_DIN[18:15], B_DIN[13:10]
	A_WEN[0] = 1	Write A_DIN[8:5], A_DIN[3:0]
	A_WEN[1] = 1	Write A_DIN[18:15], A_DIN[13:10]
512x40 (Two-port write)	B_WEN[0] = 1	Write B_DIN[9:0]
	B_WEN[1] = 1	Write B_DIN[19:10]
	A_WEN[0] = 1	Write A_DIN[9:0]
	A_WEN[1] = 1	Write A_DIN[19:10]
512x33 (Two-port ECC)	B_WEN[1:0] = 11	Write B_DIN[16:0]
	A_WEN[1:0] = 11	Write A_DIN[15:0]

A_ADDR and B_ADDR

Table 124 lists the address buses for the two ports. 14 bits are needed to address the 16K independent locations in x1 mode. In wider modes, fewer address bits are used. The required bits are MSB justified and unused LSB bits must be tied to 0. A_ADDR is synchronized by A_CLK while B_ADDR is synchronized to B_CLK. Two-port mode is in effect when the width of at least one port is greater than 20, and A_ADDR provides the read-address while B_ADDR provides the write-address.

TABLE 124: ADDRESS BUS USED AND UNUSED BITS

Depth x Width	A_ADDR/B_ADDR	
	Used Bits	Unused Bits (must be tied to 0)
16Kx1	[13:0]	None
8Kx2	[13:1]	[0]
4Kx4, 4Kx5	[13:2]	[1:0]
2Kx8, 2Kx10	[13:3]	[2:0]
1Kx16, 1Kx20	[13:4]	[3:0]
512x32 (Two-port), 512x40 (Two-port), 512x33 (Two-port ECC)	[13:5]	[4:0]

A_DIN and B_DIN

Table 31 lists the data input buses for the two ports. The required bits are LSB justified and unused MSB bits must be tied to 0. Two-port mode is in effect when the width of at least one port is greater than 20, and A_DIN provides the MSB of the write-data while B_DIN provides the LSB of the write-data.

TABLE 125: DATA INPUT BUSES USED AND UNUSED BITS

Depth x Width	A_DIN/B_DIN	
	Used Bits	Unused Bits (must be tied to 0)
16Kx1	[0]	[19:1]
8Kx2	[1:0]	[19:2]
4Kx4	[3:0]	[19:4]
4Kx5	[4:0]	[19:5]
2Kx8	[8:5] is [7:4] [3:0] is [3:0]	[19:9] [4]
2Kx10	[9:0]	[19:10]
1Kx16	[18:15] is [15:12] [13:10] is [11:8] [8:5] is [7:4] [3:0] is [3:0]	[19] [14] [9] [4]
1Kx20	[19:0]	None
512x32 (Two-port write)	A_DIN[18:15] is [31:28] A_DIN[13:10] is [27:24] A_DIN[8:5] is [23:20] A_DIN[3:0] is [19:16] B_DIN[18:15] is [15:12] B_DIN[13:10] is [11:8] B_DIN[8:5] is [7:4] B_DIN[3:0] is [3:0]	A_DIN[19] A_DIN[14] A_DIN[9] A_DIN[4] B_DIN[19] B_DIN[14] B_DIN[9] B_DIN[4]
512x40 (Two-port write)	A_DIN[19:0] is [39:20] B_DIN[19:0] is [19:0]	None

TABLE 125: DATA INPUT BUSES USED AND UNUSED BITS (CONTINUED)

Depth x Width	A_DIN/B_DIN	
	Used Bits	Unused Bits (must be tied to 0)
512x33 (Two-port ECC)	A_DIN[15:0] is [32:17] B_DIN[16:0] is [16:0]	A_DIN[19:16] B_DIN[19:17]

A_DOUT and B_DOUT

Table 126 lists the data output buses for the two ports. The required bits are LSB justified. Two-port mode is in effect when the width of at least one port is greater than 20, and A_DOUT provides the MSB of the read-data while B_DOUT provides the LSB of the read-data.

TABLE 126: DATA OUTPUT BUSES USED AND UNUSED BITS

Depth x Width	A_DOUT/B_DOUT	
	Used Bits	Unused Bits (must be tied to 0)
16Kx1	[0]	[19:1]
8Kx2	[1:0]	[19:2]
4Kx4	[3:0]	[19:4]
4Kx5	[4:0]	[19:5]
2Kx8	[8:5] is [7:4] [3:0] is [3:0]	[19:9] [4]
2Kx10	[9:0]	[19:10]
1Kx16	[18:15] is [15:12] [13:10] is [11:8] [8:5] is [7:4] [3:0] is [3:0]	[19] [14] [9] [4]
1Kx20	[19:0]	None
512x32 (Two-port write)	A_DIN[18:15] is [31:28] A_DIN[13:10] is [27:24] A_DIN[8:5] is [23:20] A_DIN[3:0] is [19:16] B_DIN[18:15] is [15:12] B_DIN[13:10] is [11:8] B_DIN[8:5] is [7:4] B_DIN[3:0] is [3:0]	A_DIN[19] A_DIN[14] A_DIN[9] A_DIN[4] B_DIN[19] B_DIN[14] B_DIN[9] B_DIN[4]
512x40 (Two-port write)	A_DOUT[19:0] is [39:20] B_DOUT[19:0] is [19:0]	None
512x33 (Two-port ECC)	A_DOUT[15:0] is [32:17] B_DOUT[16:0] is [16:0]	A_DOUT[19:16] B_DOUT[19:17]

A_BLK_EN and B_BLK_EN

Table 127 lists the block-port select control signals for the two ports. A_BLK is synchronized by A_CLK while B_BLK is synchronized to B_CLK. Two-port mode is in effect when the width of at least one port is greater than 20, and A_BLK_EN controls the read operation while B_BLK_EN controls the write operation.

TABLE 127: BLOCK-PORT SELECT

Block-port Select Signal	Value	Result
A_BLK_EN[2:0]	111	Perform read or write operation on Port A, unless the width is greater than 20 and a read is performed from both ports A and B.

TABLE 127: BLOCK-PORT SELECT (CONTINUED)

Block-port Select Signal	Value	Result
A_BLK_EN[2:0]	Any one bit is 0	No operation in memory from Port A. Port A read-data will be forced to 0. If the width is greater than 20, the read-data from both ports A and B will be forced to 0.
B_BLK_EN[2:0]	111	Perform read or write operation on Port B, unless the width is greater than 20 and a write is performed to both ports A and B.
B_BLK_EN[2:0]	Any one bit is 0	No operation in memory from Port B. Port B read-data will be forced to 0, unless the width is greater than 20 and write operation to both ports A and B is gated.

A_WMODE and B_WMODE

In true dual-port write mode, each port has a feed-through write or read-before-write option.

- Logic 00 = Read-data port holds the previous value.
- Logic 01 = Feed-through, i.e. write-data appears on the corresponding read-data port. This setting is invalid when the width of at least one port is greater than 20 and the two-port mode is in effect.
- Logic 10 = Read-before-write, i.e. previous content of the memory appears on the corresponding read-data port before it is overwritten. This setting is invalid when the width of at least one port is greater than 20 and the two-port mode is in effect.

A_CLK and B_CLK

All signals in ports A and B are synchronous to the corresponding port clock. All address, data, block-port select, write-enable and read-enable inputs must be set up before the rising edge of the clock. The read or write operation begins with the rising edge. Two-port mode is in effect when the width of at least one port is greater than 20, and A_CLK provides the read clock while B_CLK provides the write clock.

A_REN and B_REN

Enables read operation from the memory on the corresponding port. Two-port read mode is in effect when the width of port A is greater than 20, and A_REN controls the read operation.

Read-data Pipeline Register Control Signals

A_BYPASS and B_BYPASS A_DOUT_EN and B_DOUT_EN A_DOUT_SRST_N and B_DOUT_SRST_N A_D-OUT_ARST_N and B_DOUT_ARST_N

Two-port mode is in effect when the width of at least one port is greater than 20, and the A_DOUT register signals control both the MSB and LSB of the read-data, and the B_DOUT register signals are “don’t-cares”.

Table 128 describes the functionality of the control signals on the A_DOUT and B_DOUT pipeline registers.

TABLE 128: TRUTH TABLE FOR A_DOUT AND B_DOUT REGISTERS

ARST_N	_BYPASS	_CLK	_EN	_SRST_N	D	Q _{n+1}
0	X	X	X	X	X	0
1	0	Not rising	X	X	X	Q _n
1	0	↑	0	X	X	Q _n
1	0	↑	1	0	X	0
1	0	↑	1	1	D	D
1	1	X	X	X	D	D

ECC_EN and ECC_BYPASS

ECC operation is only allowed in Two-port mode and the width of both ports is greater than 20.

- ECC_EN = 0: Disable ECC.

- ECC_EN = 1, ECC_BYPASS= 0: Enable ECC Pipelined.
- ECC Pipelined mode inserts an additional clock cycle to Read-data.
- In addition, Write-feed-thru and Read-before-write modes add another clock cycle to Read- data.
- ECC_EN = 1, ECC_BYPASS= 1: Enable ECC Non-pipelined.

SB_CORRECT and DB_DETECT

Error detection and correction flags become available when ECC operation is enabled in Two-port mode and the width of both ports is greater than 20. [Table 129](#) describes the functionality of the error detection and correction flags.

TABLE 129: ERROR DETECTION AND CORRECTION FLAGS

DB_DETECT	SB_CORRECT	Flag
0	0	No errors have been detected.
0	1	A single bit error has been detected and corrected in the data output.
1	1	Multiple bit errors have been detected, but have not been corrected.

BUSY_FB

Control signal, when 1 locks the entire RAM1K20 memory from being accessed by the FCB.

ACCESS_BUSY

This output indicates that the RAM1K20 memory is being accessed by the FCB.

RAM64X12

The RAM64x12 block contains 768 memory bits and is a two-port memory providing one write port and one read port. Write operations to the RAM64x12 memory are synchronous. Read operations can be asynchronous or synchronous for setting up the address and reading out the data. Enabling synchronous operation at the read-address port improves setup timing for the read-address and its enable signals. Enabling synchronous operation at the read-data port improves clock-to-out delay. Each data port on the RAM64x12 memory is configured to a fixed configuration of 64x12.


Functionality

The main features of the RAM64x12 memory block are as follows:

- There is one read-data port and one write-data port.
- Both read-data and write-data ports are configured to 64x12.
- The write operation is always synchronous. The write-address, write-data and write-enable inputs are registered.
- Setting up the read-address can be synchronous or asynchronous. The read-address registers have an independent enable, synchronous-load and asynchronous-load for synchronous mode operation, which can be bypassed for asynchronous mode operation.
- The read-data pipeline registers have an independent enable, synchronous-load and asynchronous-load for pipeline mode operation, which can be bypassed for asynchronous mode operation.
- Therefore, there are four read operation modes:
 - Synchronous read-address without read-data pipeline registers (sync-async)
 - Synchronous read-address with read-data pipeline registers (sync-sync)
 - Asynchronous read-address with read-data pipeline registers (async-sync)
 - Asynchronous read-address without read-data pipeline registers (async-async)
- There is an independent clock for each port. The memory will be triggered at the rising edge of the clock.
- Read and write on the same location at the same time results in unknown data to be read.

There is no collision prevention or detection. However, correct data is expected to be written into the memory.

FIGURE 51: SIMPLIFIED BLOCK DIAGRAM OF RAM64X12

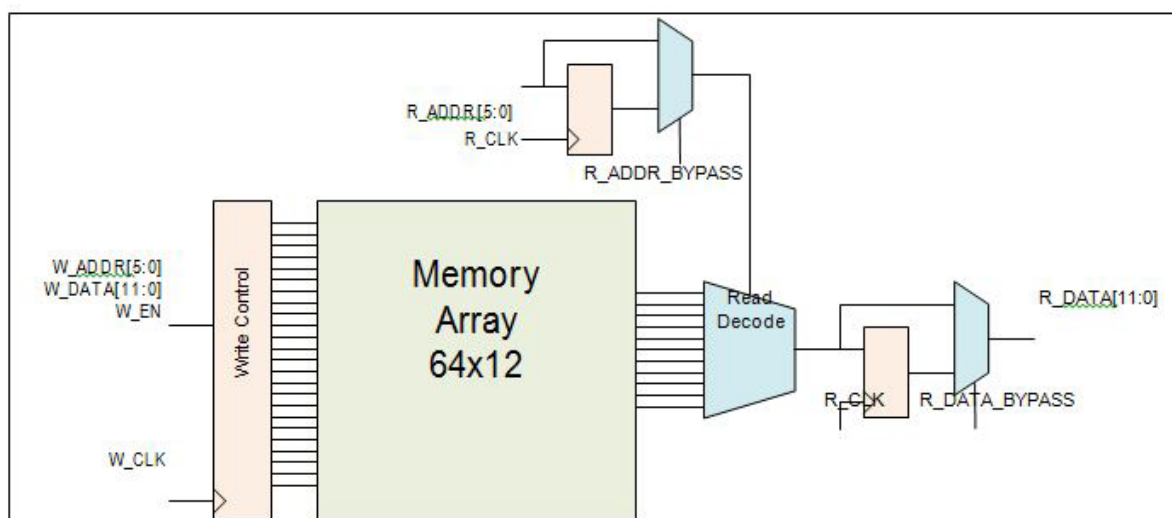

Port List

Table 130 gives the port descriptions.

TABLE 130: PORT LIST FOR RAM1K20

Pin Name	Pin Direction	Type ¹	Description	Polarity
W_EN	Input	Dynamic	Write port enable.	High
W_CLK	Input	Dynamic	Write clock. All write-address, write-data and write-enable inputs must be set up before the rising edge of the clock. The write operation begins with the rising edge.	Rising
W_ADDR[5:0]	Input	Dynamic	Write address.	—
W_DATA[11:0]	Input	Dynamic	Write-data.	—
BLK_EN	Input	Dynamic	Read port block select. When High, read operation is performed. When Low, read-data will be forced to zero. BLK_EN signal is registered through R_CLK when R_ADDR_BYPASS is Low.	High
R_CLK	Input	Dynamic	Read registers clock. All read-address, block- port select and read-enable inputs must be set up before the rising edge of the clock. The read operation begins with the rising edge.	Rising
R_ADDR[5:0]	Input	Dynamic	Read-address.	—
R_ADDR_BYPASS	Input	Static	Read-address and BLK_EN register select.	Low
R_ADDR_EN	Input	Dynamic	Read-address register enable.	High
R_ADDR_SL_N	Input	Dynamic	Read-address register synchronous load.	Low
R_ADDR_SD	Input	Static	Read-address register synchronous load data.	High

TABLE 130: (CONTINUED)PORT LIST FOR RAM1K20

Pin Name	Pin Direction	Type ¹	Description	Polarity
R_ADDR_AL_N	Input	Dynamic	Read-address register asynchronous load.	Low
R_ADDR_AD_N	Input	Static	Read-address register asynchronous load data.	Low
R_DATA[11:0]	Output	Dynamic	Read-data.	—
R_DATA_BYPASS	Input	Static	Read-data pipeline register select.	Low
R_DATA_EN	Input	Dynamic	Read-data pipeline register enable.	High
R_DATA_SL_N	Input	Dynamic	Read-data pipeline register synchronous load.	Low
R_DATA_SD	Input	Static	Read-data pipeline register synchronous load data.	High
R_DATA_AL_N	Input	Dynamic	Read-data pipeline register asynchronous load.	Low
R_DATA_AD_N	Input	Dynamic	Read-data pipeline register asynchronous load data.	Low
BUSY_FB	Input	Static	Lock access to FCB.	High
ACCESS_BUSY	Output	Dynamic	Busy signal from FCB.	High

Static inputs are defined at design time and need to be tied to 0 or 1.

Read-address and Read-data Pipeline Register Control Signals

Table 131 describes the functionality of the control signals on the R_ADDR and R_DATA registers.

TABLE 131: TRUTH TABLE FOR R_ADDR AND R_DATA REGISTERS

_AL_N	_AD_N	_BYPASS	_CLK	_EN	_SL_N	_SD	D	Q _{n+1}
0	AD _n	X	X	X	X	X	X	!AD _n
1	X	0	Not rising	X	X	X	X	Q _n
1	X	0	↑	0	X	X	X	Q _n
1	X	0	↑	1	0	SD	X	SD
1	X	0	↑	1	1	X	D	D
1	X	1	X	X	X	X	D	D

MACC_PA

The MACC_PA macro implements multiplication, multiply-add, and multiply-accumulate functions. The MACC_PA block can accumulate the current multiplication product with a previous result, a constant, a dynamic value, or a result from another MACC_PA block. Each MACC_PA block can also be configured to perform a Dot-product operation. All the signals of the MACC_PA block have optional registers.

Features

The main features of the MACC_PA block are as follows:

- Native 18 x 18 signed multiplication and supports 17 x 17 unsigned multiplication.
- Independent third input C of data width 48 bits along with a CARRYIN, optionally registered.
- Pre-adder of B with an independent fourth input D of data width 18 bits, optionally registered.
- Internal cascade signals (48-bit CDIN and CDOUT) enable cascading of the Math blocks to support larger accumulator, adder, and subtractor without extra logic.
- Normal addition/subtraction: $CARRYIN + C[47:0] + E[47:0] \pm \{ (B[17:0] \pm D[17:0]) \times A[17:0] \}$.
- Dot product mode: $(B[8:0] \pm D[8:0]) \times A[17:9] \pm (B[17:9] \pm D[17:9]) \times A[8:0]$.
- SIMD mode for dual independent multiplication of two pairs of 9-bit operands.
- Supports both registered and unregistered inputs and outputs.
- Arithmetic right-shift by 17 bits of the loopback of CDIN.

Figure 52 shows a simplified block diagram of the MACC_PA block.

FIGURE 52: SIMPLIFIED BLOCK DIAGRAM OF MACC_PA

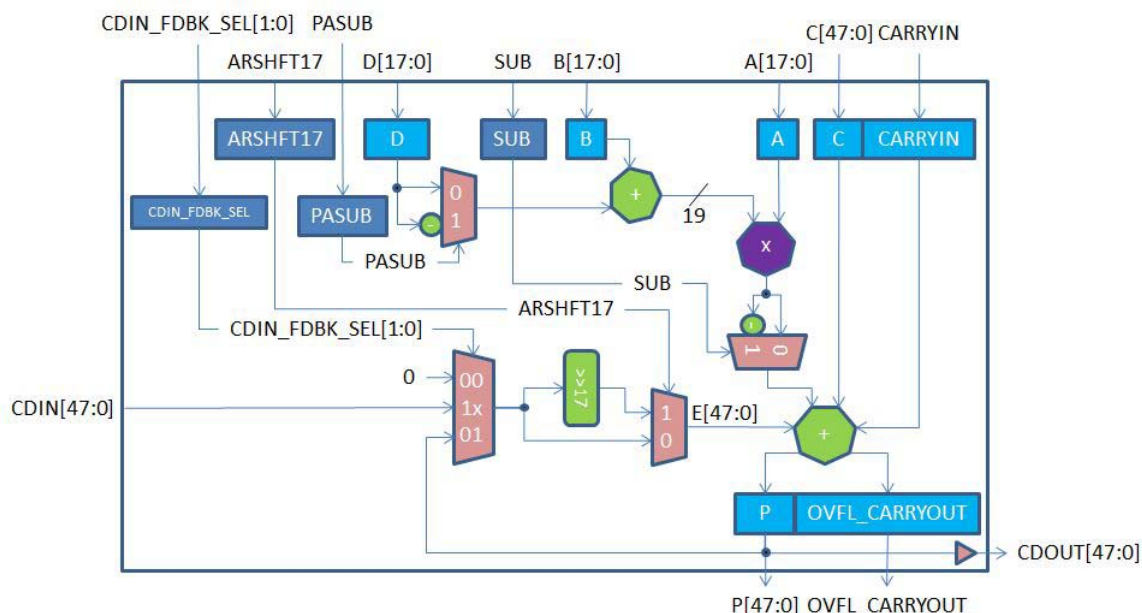


TABLE 132: MACC_PA PIN DESCRIPTIONS

Port Name	Direction	Type	Polarity	Description
DOTP	Input	Static	High	Dot-product mode. When DOTP = 1, MACC_PA block performs Dot-product of two pairs of 9-bit operands. • SIMD must not be 1. • C[8:0] must be connected to CARRYIN.

TABLE 132: MACC_PA PIN DESCRIPTIONS (CONTINUED)

SIMD	Input	Static	High	SIMD mode. When SIMD = 1, MACC_PA block performs dual independent multiplication of two pairs of 9-bit operands. • DOTP must not be 1. • ARSHFT17 must be 0. • D[8:0] must be 0. • C[17:0] must be 0. • E[17:0] must be 0. Refer to Table 133 to see how operand E is obtained from P, CDIN or 0.
OVFL_CARRY-OUT_SEL	Input	Static	High	Generate OVERFLOW or CARRYOUT with result P. • OVERFLOW when OVFL_CARRYOUT_SEL = 0 • CARRYOUT when OVFL_CARRYOUT_SEL = 1
CLK	Input	Dynamic	Rising edge	Clock for A, B, C, CARRYIN, D, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers.
AL_N	Input	Dynamic	Low	Asynchronous load for A, B, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers. Connect to 1, if none are registered. When asserted, A, B, P and OVFL_CARRYOUT registers are loaded with zero, while the ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers are loaded with the complementary value of the respective _AD_N.
A[17:0]	Input	Dynamic	High	Input data A.
A_BYPASS	Input	Static	High	Bypass data A registers. Connect to 1, if not registered. See Table 137 .
A_SRST_N	Input	Dynamic	Low	Synchronous reset for data A registers. Connect to 1, if not registered. See Table 137 .
A_EN	Input	Dynamic	High	Enable for data A registers. Connect to 1, if not registered. See Table 137 .
B[17:0]	Input	Dynamic	High	Input data B to Pre-adder with data D.
B_BYPASS	Input	Static	High	Bypass data B registers. Connect to 1, if not registered. See Table 137 .
B_SRST_N	Input	Dynamic	Low	Synchronous reset for data B registers. Connect to 1, if not registered. See Table 137 .
B_EN	Input	Dynamic	High	Enable for data B registers. Connect to 1, if not registered. See Table 137 .
D[17:0]	Input	Dynamic	High	Input data D to Pre-adder with data B. When SIMD = 1, connect D[8:0] to 0.
D_BYPASS	Input	Static	High	Bypass data D registers. Connect to 1, if not registered. See Table 138 .
D_ARST_N	Input	Dynamic	Low	Asynchronous reset for data D registers. Connect to 1, if not registered. See Table 138 .
D_SRST_N	Input	Dynamic	Low	Synchronous reset for data D registers. Connect to 1, if not registered. See Table 138 .
D_EN	Input	Dynamic	High	Enable for data D registers. Connect to 1, if not registered. See Table 138 .

TABLE 132: MACC_PA PIN DESCRIPTIONS (CONTINUED)

CARRYIN	Input	Dynamic	High	CARRYIN for input data C.
C[47:0]	Input	Dynamic	High	Input data C. When DOTP = 1, connect C[8:0] to CARRYIN. When SIMD = 1, connect C[8:0] to 0.
C_BYPASS	Input	Static	High	Bypass CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_ARST_N	Input	Dynamic	Low	Asynchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_SRST_N	Input	Dynamic	Low	Synchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_EN	Input	Dynamic	High	Enable for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
CDIN[47:0]	Input	Cascade	High	Cascaded input for operand E. The entire bus must be driven by an entire CDOUT of another MACC_PA or MACC_PA_BC_ROM block. In Dot-product mode, the driving CDOUT must also be generated by a MACC_PA or MACC_PA_BC_ROM block in Dot-product mode. Refer to Table 133 to see how CDIN is propagated to operand E.
P[47:0]	Output		High	Result data. See Table 134 .
OVFL_CARRYOUT	Output		High	OVERFLOW or CARRYOUT. See Table 135 .
P_BYPASS	Input	Static	High	Bypass P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 . P_BYPASS must be 0 when CDIN_FDBK_SEL[0] = 1. See Table 133 .
P_SRST_N	Input	Dynamic	Low	Synchronous reset for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 .
P_EN	Input	Dynamic	High	Enable for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 .
CDOUT[47:0]	Output	Cascade	High	Cascade output of result P. See Table 134 . Value of CDOUT is the same as P. The entire bus must either be dangling or drive an entire CDIN of another MACC_PA or MACC_PA_BC_ROM block in cascaded mode. must either be dangling or drive an entire CDIN of another MACC_PA or MACC_PA_BC_ROM block in cascaded mode.
PASUB	Input	Dynamic	High	Subtract operation for Pre-adder of B and D.
PASUB_BYPASS	Input	Static	High	Bypass PASUB register. Connect to 1, if not registered. See Table 136 .
PASUB_AD_N	Input	Static	Low	Asynchronous load data for PASUB register. See Table 136 .
PASUB_SL_N	Input	Dynamic	Low	Synchronous load for PASUB register. Connect to 1, if not registered. See Table 136 .
PASUB_SD_N	Input	Static	Low	Synchronous load data for PASUB register. See Table 136 .

TABLE 132: MACC_PA PIN DESCRIPTIONS (CONTINUED)

PASUB_EN	Input	Dynamic	High	Enable for PASUB register. Connect to 1, if not registered. See Table 136 .
CDIN_FDBK_SEL[1:0]	Input	Dynamic	High	Select CDIN, P or 0 for operand E. See Table 133 .
CDIN_FDBK_SEL_BYPASS	Input	Static	High	Bypass CDIN_FDBK_SEL register. Connect to 1, if not registered. See Table 136 .
CDIN_FDBK_SEL_AD_N[1:0]	Input	Static	Low	Asynchronous load data for CDIN_FDBK_SEL register. See Table 136 .
CDIN_FDBK_SEL_SL_N	Input	Dynamic	Low	Synchronous load for CDIN_FDBK_SEL register. Connect to 1, if not registered. See Table 136 .
CDIN_FDBK_SEL_SD_N[1:0]	Input	Static	Low	Synchronous load data for CDIN_FDBK_SEL register. See Table 136 .
CDIN_FDBK_SEL_SD_N[1:0]	Input	Static	Low	Synchronous load data for CDIN_FDBK_SEL register. See Table 136 .
CDIN_FDBK_SEL_EN	Input	Dynamic	High	Enable for CDIN_FDBK_SEL register. Connect to 1, if not registered. See Table 136 .
ARSHFT17	Input	Dynamic	High	Arithmetic right-shift for operand E. When asserted, a 17-bit arithmetic right-shift is performed on operand E. Refer to Table 133 to see how operand E is obtained from P, CDIN or 0. When SIMD = 1, ARSHFT17 must be 0.
ARSHFT17_BYPASS	Input	Static	High	Bypass ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
ARSHFT17_AD_N	Input	Static	Low	Asynchronous load data for ARSHFT17 register. See Table 136 .
ARSHFT17_SL_N	Input	Dynamic	Low	Synchronous load for ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
ARSHFT17_SD_N	Input	Static	Low	Synchronous load data for ARSHFT17 register. See Table 136 .
ARSHFT17_EN	Input	Dynamic	High	Enable for ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
SUB	Input	Dynamic	High	Subtract operation.
SUB_BYPASS	Input	Static	High	Bypass SUB register. Connect to 1, if not registered. See Table 136 .
SUB_AD_N	Input	Static	Low	Asynchronous load data for SUB register. See Table 136 .
SUB_SL_N	Input	Dynamic	Low	Synchronous load for SUB register. Connect to 1, if not registered. See Table 136 .
SUB_SD_N	Input	Static	Low	Synchronous load data for SUB register. See Table 136 .
SUB_EN	Input	Dynamic	High	Enable for SUB register. Connect to 1, if not registered. See Table 136 .

Note: Static inputs are defined at design time and need to be tied to 0 or 1.

TABLE 133: TRUTH TABLE—PROPAGATING DATA TO OPERAND E

CDIN_FDBK_SEL[1]	CDIN_FDBK_SEL[0]	ARSHFT17	Operand E
0	0	X	48'b0
0	1	0	P[47:0]
0	1	1	{{17{P[47]}},P[47:17]}
1	X	0	CDIN[47:0]
1	X	1	{{17{CDIN[47]}},CDIN[47:17]}

TABLE 134: TRUTH TABLE - COMPUTATION OF RESULT P AND CDOUT

SIMD	DOTP	SUB	PASUB	Result P and CDOUT
0	0	0	0	$CARRYIN + C[47:0] + E[47:0] + \{ (B[17:0] + D[17:0]) \times A[17:0] \}$
0	0	0	1	$CARRYIN + C[47:0] + E[47:0] + \{ (B[17:0] - D[17:0]) \times A[17:0] \}$
0	0	1	0	$CARRYIN + C[47:0] + E[47:0] - \{ (B[17:0] + D[17:0]) \times A[17:0] \}$
0	0	1	1	$CARRYIN + C[47:0] + E[47:0] - \{ (B[17:0] - D[17:0]) \times A[17:0] \}$
0	1	0	0	$CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] + D[8:0]) \times A[17:9] + (B[17:9] + D[17:9]) \times A[8:0] \} \times 29$
0	1	0	1	$CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] - D[8:0]) \times A[17:9] + (B[17:9] - D[17:9]) \times A[8:0] \} \times 29$
0	1	1	0	$CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] + D[8:0]) \times A[17:9] - (B[17:9] + D[17:9]) \times A[8:0] \} \times 29$
0	1	1	1	$CARRYIN + C[47:0] + E[47:0] + \{ (B[8:0] - D[8:0]) \times A[17:9] - (B[17:9] - D[17:9]) \times A[8:0] \} \times 29$
1	0	0	0	$P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$ $P[47:18] = C[47:18] + E[47:18] + \{ (B[17:9] + D[17:9]) \times A[17:9] \}$
1	0	0	1	$P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$ $P[47:18] = C[47:18] + E[47:18] + \{ (B[17:9] - D[17:9]) \times A[17:9] \}$
1	0	1	0	$P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$ $P[47:18] = C[47:18] + E[47:18] - \{ (B[17:9] + D[17:9]) \times A[17:9] \}$
1	0	1	1	$P[17:0] = CARRYIN + \{ B[8:0] \times A[8:0] \}$ $P[47:18] = C[47:18] + E[47:18] - \{ (B[17:9] - D[17:9]) \times A[17:9] \}$

TABLE 135: TRUTH TABLE - COMPUTATION OF OVFL_CARRYOUT

OVFL_CARRYOUT_SEL	OVFL_CARRYOUT	Description
0	$(SUM[49] \wedge SUM[48]) \mid (SUM[48] \wedge SUM[47])$	True if overflow or underflow occurred.
1	$C[47] \wedge E[47] \wedge SUM[48]$	A signal that can be used to extend the final adder in the fabric.

Note: SUM[49:0] is defined similarly to P[47:0] as shown in [Table 134](#), except that SUM is a 50-bit quantity so that no overflow can occur. SUM[48] is the carry out bit of a 48-bit final adder producing P[47:0].

TABLE 136: TRUTH TABLE FOR CONTROL REGISTERS ARSHFT17, CDIN_FDBK_SEL, PASUB AND SUB

AL_N	_AD_N	_BYPASS	CLK	_EN	_SL_N	_SD_N	D	Qn+1
0	AD_N	0	X	X	X	X	X	!AD_N
1	X	0	Not rising	X	X	X	X	Qn
1	X	0	↑	0	X	X	X	Qn
1	X	0	↑	1	0	SD_N	X	!SD_N
1	X	0	↑	1	1	X	D	D
X	X	1	X	0	X	X	X	Qn
X	X	1	X	1	0	SD_N	X	!SD_N
X	X	1	X	1	1	X	D	D

TABLE 137: TRUTH TABLE - DATA REGISTERS A, B, P AND OVFL_CARRYOUT

AL_N	_BYPASS	CLK	_EN	_SRST_N	D	Qn+1
0	0	X	X	X	X	0
1	0	Not rising	X	X	X	Qn
1	0	↑	0	X	X	Qn
1	0	↑	1	0	X	0
1	0	↑	1	1	D	D
X	1	X	0	X	X	Qn
X	1	X	1	0	X	0
X	1	X	1	1	D	D

TABLE 138: TRUTH TABLE - DATA REGISTERS C, CARRYIN AND D

_ARST_N	_BYPASS	CLK	_EN	_SRST_N	D	Qn+1
0	0	X	X	X	X	0
1	0	Not rising	X	X	X	Qn
1	0	↑	0	X	X	Qn
1	0	↑	1	0	X	0
1	0	↑	1	1	D	D
X	1	X	0	X	X	Qn
X	1	X	1	0	X	0
X	1	X	1	1	D	D

MACC_PA_BC_ROM

The MACC_PA_BC_ROM macro extends the functionality of the MACC_PA macro to provide a 16x18 ROM at the A input along with a pipelined output of B for cascading.


Features

The additional features of the MACC_PA_BC_ROM block are as follows:

- Selection of the A input from a 16x18 ROM.
- Additional pipelining of the B input for cascading to the next Math block or output to the fabric.
- Due to routing bandwidth limitations, either result P or B2 output can be used in the same MACC_PA_BC_ROM block.

Figure 53 shows a simplified block diagram of the MACC_PA_BC_ROM block.

FIGURE 53: SIMPLIFIED BLOCK DIAGRAM OF MACC_PA

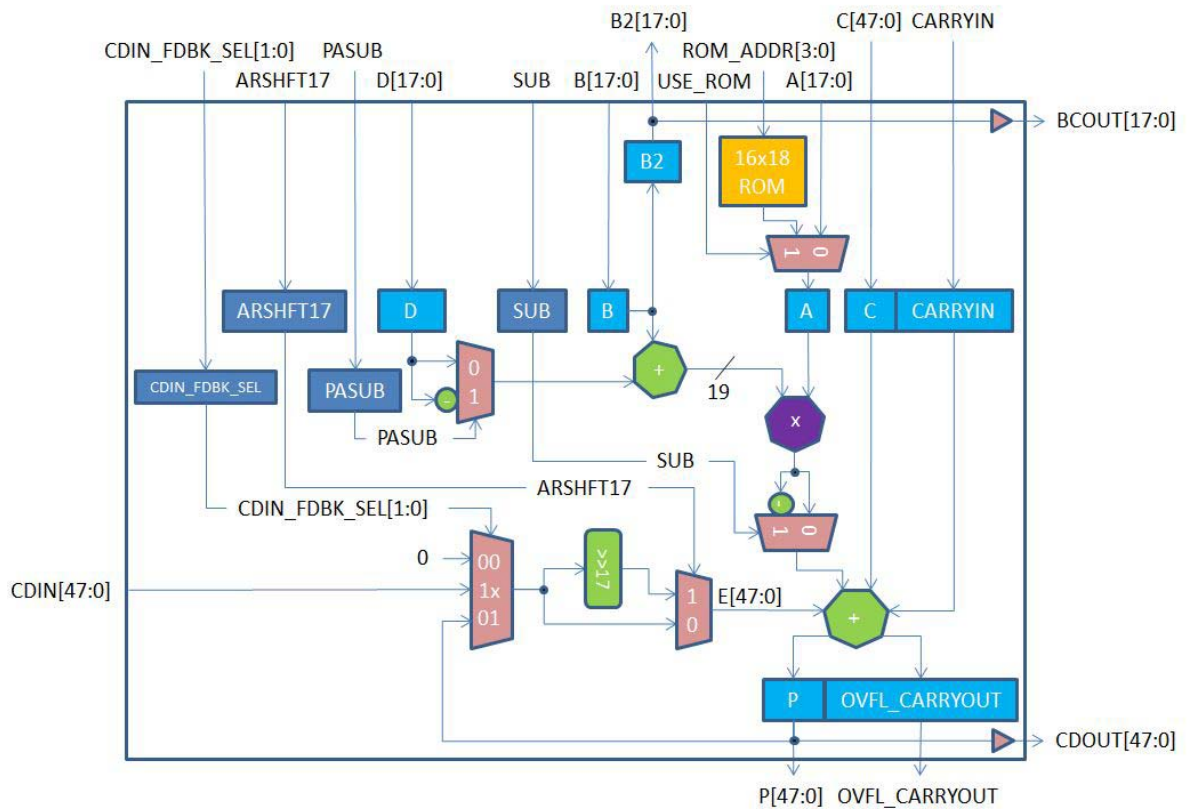

PARAMETERS

There is one parameter, INIT, to hold the 16x18 ROM content as a linear array. The first 18 bits is word 0, the next 18 bits is word 1, and so on.

TABLE 139: MACC_PA_BC_ROM PARAMETER DESCRIPTIONS

Parameter	Dimensions	Description
INIT	parameter [287:0] INIT = { 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0, 18'h0 };	16 x 18 ROM content specified in Verilog
INIT	generic map(INIT => (B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"& B"00_0000_0000_0000_0000"))	16 x 18 ROM content specified in VHDL

PORT LIST

TABLE 140: MACC_PA_BC_ROM PIN DESCRIPTIONS

Port Name	Direction	Type	Polarity	Description
DOTP	Input	Static	High	Dot-product mode. When DOTP = 1, MACC_PA_BC_ROM block performs Dot-product of two pairs of 9-bit operands. • SIMD must not be 1. • C[8:0] must be connected to CARRYIN.
SIMD	Input	Static	High	SIMD mode. When SIMD = 1, MACC_PA_BC_ROM block performs dual independent multiplication of two pairs of 9-bit operands. • DOTP must not be 1. • ARSHFT17 must be 0. • D[8:0] must be 0. • C[17:0] must be 0. E[17:0] must be 0. Refer to Table 133 to see how operand E is obtained from P, CDIN or 0.
OVFL_CARRYOUT_SEL	Input	Static	High	Generate OVERFLOW or CARRYOUT with result P. • OVERFLOW when OVFL_CARRYOUT_SEL = 0 • CARRYOUT when OVFL_CARRYOUT_SEL = 1
CLK	Input	Dynamic	Rising edge	Clock for A, B, C, CARRYIN, D, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers.

TABLE 140: MACC_PA_BC_ROM PIN DESCRIPTIONS (CONTINUED)

AL_N	Input	Dynamic	Low	Asynchronous load for A, B, B2, P, OVFL_CARRYOUT, ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers. Connect to 1, if none are registered. When asserted, A, B, P and OVFL_CARRYOUT registers are loaded with zero, while the ARSHFT17, CDIN_FDBK_SEL, PASUB and SUB registers are loaded with the complementary value of the respective _AD_N.
USE_ROM	Input	Static (virtual)	High	Selection for operand A. - When USE_ROM = 0, select input data A. - When USE_ROM = 1, select ROM data at ROM_ADDR.
ROM_ADDR[3:0]	Input	Dynamic	High	Address of ROM data for operand A when USE_ROM = 1.
A[17:0]	Input	Static	High	Input data for operand A when USE_ROM = 0.
A_BYPASS	Input	Dynamic	High	Bypass data A registers. Connect to 1, if not registered. See Table 137 .
A_SRST_N	Input	Dynamic	Low	Synchronous reset for data A registers. Connect to 1, if not registered. See Table 137 .
A_EN	Input	Dynamic	High	Enable for data A registers. Connect to 1, if not registered. See Table 137 .
B[17:0]	Input	Dynamic	High	Input data B to Pre-adder with data D.
B_BYPASS	Input	Static	High	Bypass data B registers. Connect to 1, if not registered. See Table 137 .
B_SRST_N	Input	Dynamic	Low	Synchronous reset for data B registers. Connect to 1, if not registered. See Table 137 .
B_EN	Input	Dynamic	High	Enable for data B registers. Connect to 1, if not registered. See Table 137 .
B2[17:0]	Output	Dynamic	High	Pipelined output of input data B. Result P should be floating when B2 is used.
B2_BYPASS	Input	Static	High	Bypass data B2 registers. Connect to 1, if not registered. See Table 137 .
B2_SRST_N	Input	Dynamic	Low	Synchronous reset for data B2 registers. Connect to 1, if not registered. See Table 137 .
B2_EN	Input	Dynamic	High	Enable for data B2 registers. Connect to 1, if not registered. See Table 137 .
BCOUT[17:0]	Output	Cascade	High	Cascade output of B2. Value of BCOUT is the same as B2. The entire bus must either be dangling or drive an entire B input of another MACC_PA or MACC_PA_BC_ROM block.
D[17:0]	Input	Dynamic	High	Input data D to Pre-adder with data B. When SIMD = 1, connect D[8:0] to 0.
D_BYPASS	Input	Static	High	Bypass data D registers. Connect to 1, if not registered. See Table 138 .
D_ARST_N	Input	Dynamic	Low	Asynchronous reset for data D registers. Connect to 1, if not registered. See Table 138 .

TABLE 140: MACC_PA_BC_ROM PIN DESCRIPTIONS (CONTINUED)

D_SRST_N	Input	Dynamic	Low	Synchronous reset for data D registers. Connect to 1, if not registered. See Table 138 .
D_EN	Input	Dynamic	High	Enable for data D registers. Connect to 1, if not registered. See Table 138 .
CARRYIN	Input	Dynamic	High	CARRYIN for input data C.
C[47:0]	Input	Dynamic	High	Input data C. When DOTP = 1, connect C[8:0] to CARRYIN. When SIMD = 1, connect C[8:0] to 0.
C_BYPASS	Input	Static	High	Bypass CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_ARST_N	Input	Dynamic	Low	Asynchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_SRST_N	Input	Dynamic	Low	Synchronous reset for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
C_EN	Input	Dynamic	High	Enable for CARRYIN and C registers. Connect to 1, if not registered. See Table 138 .
CDIN[47:0]	Input	Cascade	High	Cascaded input for operand E. The entire bus must be driven by an entire CDOUT of another MACC_PA or MAC_PA_BC_ROM block. In Dot-product mode, the driving CDOUT must also be generated by a MACC_PA or MAC_PA_BC_ROM block in Dot-product mode. Refer to Table 133 to see how CDIN is propagated to operand E.
P[47:0]	Output		High	Result data. See Table 134 . B2 output should be floating when P is used.
OVFL_CARRYOUT	Output		High	OVERFLOW or CARRYOUT. See Table 135 .
P_BYPASS	Input	Static	High	Bypass P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 . P_BYPASS must be 0 when CDIN_FDBK_SEL[0] = 1. See Table 133 .
P_SRST_N	Input	Dynamic	Low	Synchronous reset for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 .
P_EN	Input	Dynamic	High	Enable for P and OVFL_CARRYOUT registers. Connect to 1, if not registered. See Table 137 .
CDOUT[47:0]	Output	Cascade	High	Cascade output of result P. See Table 134 . Value of CDOUT is the same as P. The entire bus must either be dangling or drive an entire CDIN of another MACC_PA or MAC_PA_BC_ROM block in cascaded mode.
PASUB	Input	Dynamic	High	Subtract operation for Pre-adder of B and D.
PASUB_BYPASS	Input	Static	High	Bypass PASUB register. Connect to 1, if not registered. See Table 136 .
PASUB_AD_N	Input	Static	Low	Asynchronous load data for PASUB register. See Table 136 .

TABLE 140: MACC_PA_BC_ROM PIN DESCRIPTIONS (CONTINUED)

PASUB_SL_N	Input	Dynamic	Low	Synchronous load for PASUB register. Connect to 1, if not registered. See Table 136 .
PASUB_SD_N	Input	Static	Low	Synchronous load data for PASUB register. See Table 136 .
PASUB_EN	Input	Dynamic	High	Enable for PASUB register. Connect to 1, if not registered. See Table 136 .
CDIN_FDBK_SEL[1:0]	Input	Dynamic	High	Select CDIN, P or 0 for operand E. See Table 133 .
CDIN_FDBK_SEL_BYPASS	Input	Static	High	Select CDIN, P or 0 for operand E. See Table 133 .
CDIN_FDBK_SEL_AD_N [1:0]	Input	Static	Low	Asynchronous load data for CDIN_FDBK_SEL register. See Table 136 .
CDIN_FDBK_SEL_SL_N	Input	Dynamic	Low	Synchronous load for CDIN_FDBK_SEL register. Connect to 1, if not registered. See Table 136 .
CDIN_FDBK_SEL_SD_N [1:0]	Input	Static	Low	Synchronous load data for CDIN_FDBK_SEL register. See Table 136 .
CDIN_FDBK_SEL_EN	Input	Dynamic	High	Enable for CDIN_FDBK_SEL register. Connect to 1, if not registered. See Table 136 .
ARSHFT17	Input	Dynamic	High	Arithmetic right-shift for operand E. When asserted, a 17-bit arithmetic right-shift is performed on operand E. Refer to Table 133 to see how operand E is obtained from P, CDIN or 0. When SIMD = 1, ARSHFT17 must be 0.
ARSHFT17_BYPASS	Input	Static	High	Bypass ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
ARSHFT17_AD_N	Input	Static	Low	Asynchronous load data for ARSHFT17 register. See Table 136 .
ARSHFT17_SL_N	Input	Dynamic	Low	Synchronous load for ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
ARSHFT17_SD_N	Input	Static	Low	Synchronous load data for ARSHFT17 register. See Table 136 .
ARSHFT17_EN	Input	Dynamic	High	Enable for ARSHFT17 register. Connect to 1, if not registered. See Table 136 .
SUB	Input	Dynamic	High	Subtract operation.
SUB_BYPASS	Input	Static	High	Bypass SUB register. Connect to 1, if not registered. See Table 136 .
SUB_AD_N	Input	Static	Low	Asynchronous load data for SUB register. See Table 136 .
SUB_SL_N	Input	Dynamic	Low	Synchronous load for SUB register. Connect to 1, if not registered. Table 136 .
SUB_SD_N	Input	Static	Low	Synchronous load data for SUB register. See Table 136 .
SUB_EN	Input	Dynamic	High	Enable for SUB register. Connect to 1, if not registered. See Table 136 .

Note: Static inputs are defined at design time and need to be tied to 0 or 1.

APPENDIX A: REVISION HISTORY

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the oldest publication.

REV. A - 11/2020

Revision 1.0 of this datasheet was published in November 2020. Document formatted to Microchip template.

THE MICROCHIP WEBSITE

Microchip provides online support via our WWW site at www.microchip.com. This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at: www.microchip.com/support

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-7219-3

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
[http://www.microchip.com/
support](http://www.microchip.com/support)
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820