

Oscillators

MEMS and Crystal Solutions






Microchip's Clock and Timing Solutions

One-Stop Shop for All Your Timing Needs

Microchip's clock and timing portfolio features a wide range of highly integrated, flexible and easy-to-use oscillators, clocks and clock distribution products to meet many of your development needs.

Our oscillator products offer both low-jitter and low-power configurable products with the option of a Quartz- or MEMS-based resonator inside. The clock generation line offers online configurability, single-chip and multiple frequency clock tree solutions. Our clock and data distribution product line includes one of the industry's largest portfolios of buffers, logic translators and multiplexers, rounding off the portfolio and extends a true total solution for clock and timing products to our customers.

We Deliver the Complete Clock Tree

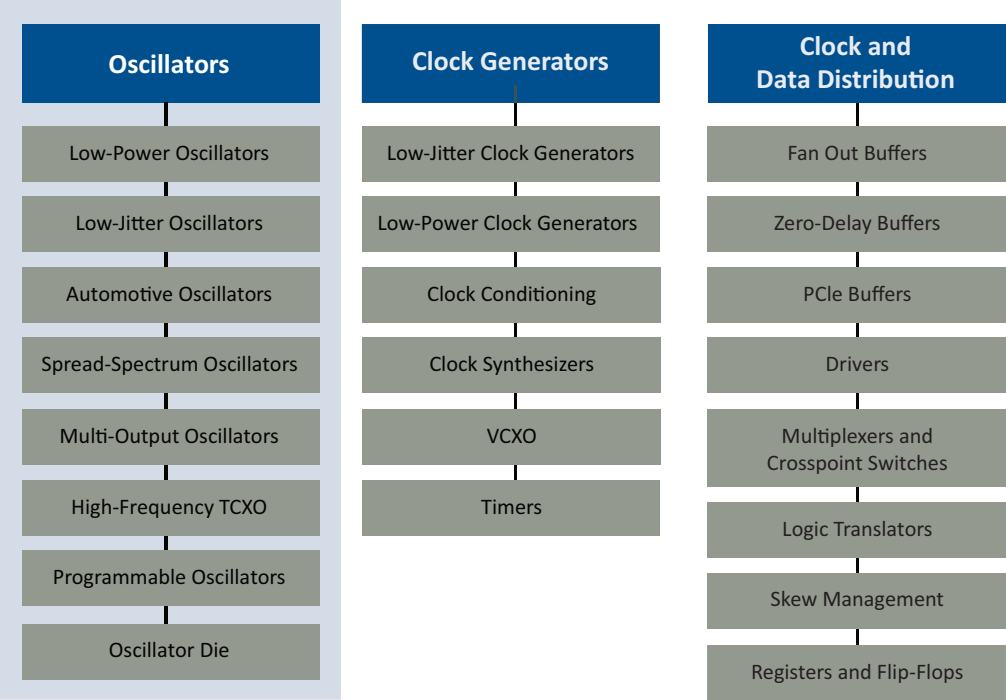


Oscillators

MEMS and Crystal-Based Solutions

Microchip has a variety of oscillators to meet the needs of every application. Whether its MEMS-based or Crystal-based, both technologies have advantages to meet specific needs. While crystal-based oscillators have long been preferred for applications that require very accurate and low-jitter timing reference, MEMS-based oscillators are well-suited to low-power applications where small size, high temperature stability, superior shock immunity and shorter production cycle times are a factor.

Microchip MEMS



Semiconductor
Manufacturing

Quartz Crystal




Individually
Grown/Cut


MEMS-Based Oscillators

Microchip has developed unique MEMS-based oscillators that replace traditional quartz solutions. A micrometer-sized polysilicon MEMS resonator is packaged with a CMOS oscillator ASIC, yielding a single-package integrated solution.

Our MEMS-based timing products are ultra-small with exceptional shock resistance, due to the ultra miniature resonator. They also operate with excellent frequency stability over extended temperature ranges. They are an ideal choice in demanding environments where high reliability is key, and performance must be maintained at temperature extremes—such as automotive and many consumer/industrial applications.

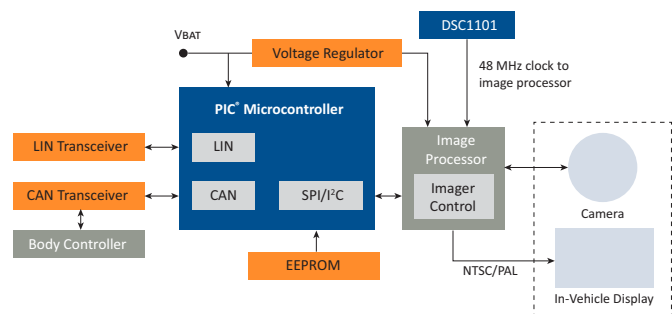

Automotive Camera Application,
Using the MEMS DSA1101 Oscillator

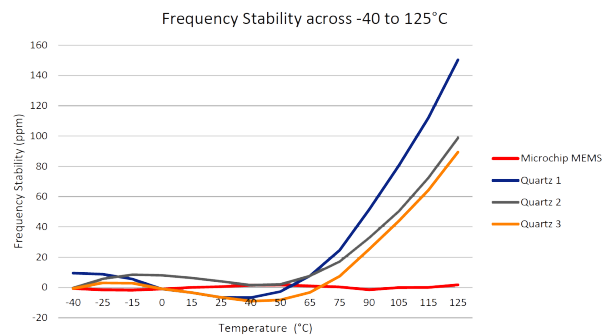

High Stability Over Extended Temperature





Quartz-Based Oscillators

Microchip's quartz-based oscillators are available in single-package fully integrated solutions.

Our assembly process physically isolates the crystal blank from other components, and preserves crystal aging stability and reliability. The oscillator ASIC includes a very low-noise phase lock loop and one or more output buffers, achieving programmability in frequency, output format and OE options.

Ultra-low phase jitter at 100 fs and less makes the MX series of products a perfect choice for demanding high-speed telecommunication/networking applications.

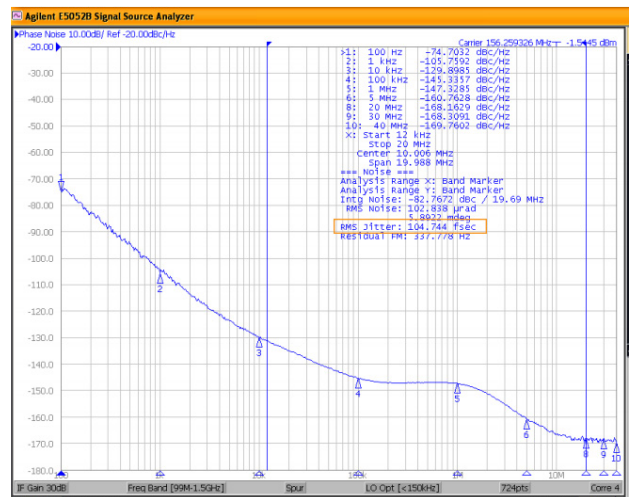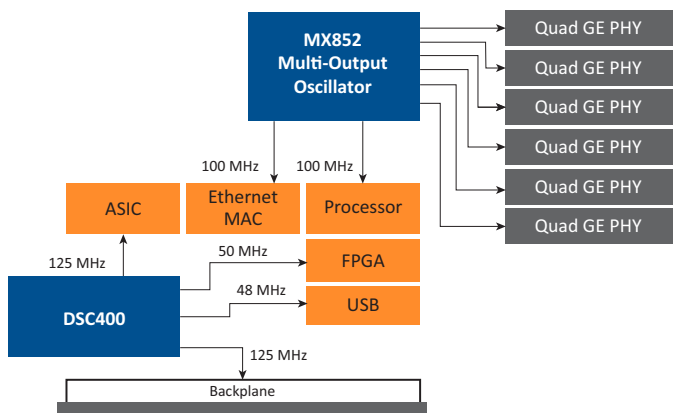

Ethernet 10 Gbps Switch,
Using the MX852 Multi-Output Quartz Oscillator

Ultra-Low Phase Noise: 105 fs at 12 kHz to 20 MHz

Technology	Type	Part Number	Features																
			Frequency Range (MHz)	Number of Outputs	Output Type	Supply Voltage	Frequency Tolerance (±ppm)	Temp. Range (°C)	Jitter (ps RMS, typ.)	Package Size (mm)	Typical IDD (mA)	Functions							
MEMS-Based	Ultra-Low Power	DSC60XX	0.002 to 80	1	LVCMOS	1.71 to 3.63	±25/50	-20 to 70 -40 to 85	15	3.2 × 2.5 (4L) 2.5 × 2.0 (4L) 2.0 × 1.6 (4L) 1.6 × 1.2 (4L)	1.5	FS/OE/STDBY, AEC-Q100 ²							
		DSC61XX	0.002 to 100						7.5	3									
	Low Power	DSC1001/1003/1004	1 to 150	1	LVCMOS	1.62 to 3.63	±10/25/50 ¹	0 to 70 -20 to 70 -40 to 85 -40 to 105	10	7.0 × 5.0 (4L) 5.0 × 3.2 (4L) 3.2 × 2.5 (4L) 2.5 × 2.0 (4L)	5	AEC-Q100, STDBY, DSC1001:15pf, DSC1003:25pf, DSC1004:40pf							
		DSC1033	1 to 150	1	LVCMOS	3.3	±25/50	0 to 70 -20 to 70 -40 to 85	20		3	STDBY, AEC-Q100							
		DSC1030				3.0													
		DSC1028				2.8													
		DSC1025				2.5													
		DSC1018				1.8													
	Low Jitter	DSC1101/1121	2.3 to 170	1	LVCMOS	2.25 to 3.63	±10/25/50 ¹	-20 to 70 -40 to 85 -40 to 105 -55 to 125	0.37 (100k to 20 MHz) 1.5 (12k to 20 MHz)	7.0 × 5.0 (6L) 5.0 × 3.2 (6L) 3.2 × 2.5 (6L) 2.5 × 2.0 (6L)	25	OE/STDBY, AEC-Q100							
		DSC2010/11	2.3 to 170	1/2	LVCMOS					3.2 × 2.5 (14L)	30	FS up to 8 freq, OE STDBY/AEC-Q100							
		DSC2110/11	2.3 to 170	1/2	LVCMOS						30	I ² C, OE/STDBY							
		DSC2210/11	2.3 to 170	1/2	LVCMOS						30	SPI, OW/STDBY, AEC-Q100							
		DSC2311	2.3 to 171	2	LVCMOS				2.5 × 2.0 (6L)	30	OE, AEC-Q100								
	Differential	DSC1102/1122 DSC1103/1123 DSC1104/1124	2.3 to 460	1	LVPECL LVDS HCSL	2.25 to 3.63	±10/25/50 ¹	-20 to 70 -40 to 85 -40 to 105	0.37 (100k to 20 MHz)	7.0 × 5.0 (6L) 5.0 × 3.2 (6L) 3.2 × 2.5 (6L) 2.5 × 2.0 (6L)	40 25 30	OE/STDBY, AEC-Q100							
		DSC2020/22			1/2	LCPECL	2.25 to 3.63			±25/50	1.5 (12k to 20 MHz)	3.2 × 2.5 (14L)	30	FS up to 8 freq, OE STDBY					
		DSC2130/33			1/2	LVDS							30	I ² C, OE/STDBY					
		DSC2240/44	1/2	HCSL	30	SPI, OW/STDBY, AEC-Q100													
		DSA1102/1122 DSA1103/1123 DSA1104/1124	2.3 to 460	1	LVPECL LVDS HCSL	2.25 to 3.63	±20/25/50 ¹		-40 to 85 -40 to 105 -20 to 85 -40 to 105 -40 to 125	1.5 (12k to 20 MHz)	5.0 × 3.2 (6L) 3.2 × 2.5 (6L) 2.5 × 2.0 (6L)	40 25 30	AEC-Q100, OE/ STDBY						
		Crystal-Based			Ultra-Low Jitter	MX57	< 840				1	LVCMOS	2.25 to 3.63	±50	-20 to 70 -40 to 85	0.16	7.0 × 5.0 (6L)	70	OE on pin 1 or pin 2
						MX55						LVPECL					5.0 × 3.2 (6L)		
			MX85	LVDS HCSL		7.0 × 5.0 (38L)			90	2 OE pins									
		TCXO	Ultra-Low Jitter TCXO	MXT57	< 840	1	LVCMOS LVPECL LVDS HCSL		2.25 to 3.63	±2.5	-20 to 70 -40 to 85	0.2 ²	7.0 × 5.0 (6L)	70	OE on pin 1 or pin 2				
MEMS-Based	Programmable	DSC60XX-000.0000	0.002 to 80	1	LVCMOS	1.71 to 3.63	±25/50	-20 to 70 -40 to 85	15	3.2 × 2.5 (4L) 2.5 × 2.0 (4L) 2.0 × 1.6 (4L) 1.6 × 1.2 (4L)	1.5	Field- Programmable with TimeFlash Oscillator Programmer							
		DSC61XX-000.0000	0.002 to 100						7.5	3									
		DSC8001/8003/8004	1 to 150	1	LVCMOS	1.62 to 3.63	±10/25/50 ¹	0 to 70 -20 to 70 -40 to 85 -40 to 105	10	7.0 × 5.0 (4L) 5.0 × 3.2 (4L) 3.2 × 2.5 (4L) 2.5 × 2.0 (4L)	5								
		DSC8002	1 to 150	1	LVCMOS	1.62 to 3.63	±25/50	20	3										
		DSC8101/8121	2.3 to 170	1	LVCMOS	2.25 to 3.63	±10/25/50 ¹	-20 to 70 -40 to 85 -40 to 105 -55 to 125	0.37 (100k to 20 MHz) 1.5 (12k to 20 MHz)	7.0 × 5.0 (6L) 5.0 × 3.2 (6L) 3.2 × 2.5 (6L) 2.5 × 2.0 (6L)	25								
		DSC8102/8122	2.3 to 460		LVPECL						40								
		DSC8103/8123			LVDS						25								
		DSC8104/8124			HCSL						30								

Note 1: ±10 ppm supported for up to -40 to 105°C 2: AEC-Q100 Grade 3 qualification will be complete in CYQ4 2016 3: Consumes ~1 mA. Not suitable for low-power RTC function. 4: -40 to 105°C

Applications																			
Embedded and IoT			Server/Storage					Audio/Video				Communication						Automotive	
MCU/DSP Reference Clock (12/16/24/26 MHz)	USB 2.0/3.0 (24/48 MHz)	Sensor/RTC (2-999kHz/32.768 kHz)	PCI/PCI-X (33.33/66.66/133.33 MHz)	PCI Express Gen 1/2/3/4 (100/125 MHz)	Fiber Channel (106.25/212.5/75/150 MHz)	SAT/SATA (75/100/150 MHz)	OP/ Omni-Path (100/133.33/200/266.67/ 33.33/400/322.256 MHz)	Audio (2.048/2.8224/12.288/ 16.9344/24.576/33.8668/ 32.768/45.1584 MHz)	Video: SD/HD SDI (27/54/74.25/108 /270 MHz)	Video: 3G/6G/12G SDI (148.5/148.3516/297/ 296.7032 MH)	Video: Display Port (162.27 MHz)	10/100/1000-bit Ethernet 25/100/125 MHz	10 GbE XUAL (156.25 MHz)	40/100 GbE (322.0664/644.1328 MHz)	GPON (155.52 MHz)	SONET (OC-3/12/48/192/768/ 19.44/77.76/155.52/ 622.08 MHz)	Serial Rapid IO (125/156.25/312.5 MHz)	25/27/49.5/100 MHz	
✓		✓ ³						✓											✓ ²
✓	✓ 2.0	✓ ³						✓											✓ ²
✓	✓ 2.0		✓					✓	✓			✓							✓ ⁴
✓			✓					✓											
✓			✓					✓											
✓			✓					✓											
✓	✓ 3.0		✓			✓		✓	✓			✓							✓ -55 to 125°C
✓	✓ 3.0		✓			✓		✓	✓			✓							✓ -55 to 125°C
✓	✓ 3.0		✓			✓		✓	✓			✓							✓ -55 to 125°C
✓	✓ 3.0		✓			✓		✓	✓			✓							✓ -55 to 125°C
✓	✓ 3.0		✓			✓		✓	✓			✓							✓ -55 to 125°C
									✓	✓	✓	✓			✓				✓ ⁴
				✓		✓				✓							✓		✓ ⁴
✓												✓			✓				✓ ⁴
✓									✓	✓	✓								✓ ⁴
✓				✓		✓													✓ ⁴
																			✓
																			✓
																			✓
			✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓		
			✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓		
			✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓		
					✓		✓						✓	✓		✓			
✓		✓ ³						✓											
✓		✓ ³						✓											
✓			✓					✓				✓							
✓			✓					✓											
✓			✓			✓		✓	✓			✓							
									✓	✓	✓	✓			✓				
				✓		✓	✓				✓						✓		




Select the Right Oscillator For Your Application

	Traditional Crystal Oscillator	Microchip Quartz-Based Oscillator	Microchip MEMS-Based Oscillator	Features
Frequency Stability Over Temperature	●	●	●	<ul style="list-style-type: none"> MEMS offers ± 10 ppm over wide temperature range Microchip quartz achieves superior aging
Size	●	●	●	<ul style="list-style-type: none"> MEMS offers ultra-small footprints (1.6×1.2 mm) Leads industry trend in size reduction
Reliability	●	●	●	<ul style="list-style-type: none"> MEMS wafer-stage ultra-clean hermetic seal Microchip quartz separates crystal and ASIC enclosures
Jitter Close-In Phase Noise	●	●	●	<ul style="list-style-type: none"> Microchip quartz is superior with reduced close-in phase noise MEMS and quartz comparable at high-frequency offsets
Features	○	●	●	<ul style="list-style-type: none"> Selectable frequencies from one output OTP programmable at any frequency, anytime
Start-Up	●	●	●	<ul style="list-style-type: none"> MEMS achieves fast start-up time (< 2 ms) Eliminate start-up issue of crystal-based designs
Integration	○	●	●	<ul style="list-style-type: none"> Multiple outputs from a single device Utilizes highly integrated ASIC

● Best ○ Worst

Oscillator Package Options



7.0 × 5.0 mm



5.0 × 3.2 mm



3.2 × 2.5 mm



2.5 × 2.0 mm



2.0 × 1.6 mm




1.6 × 1.2 mm

DSC6000 Family

Ultra-Low Power and Ultra-Small MEMS Oscillators

The DSC6000 family of MEMS oscillators combines the industry leading low-power consumption and ultra-small packages with exceptional frequency stability and jitter performance over temperature. These MEMS oscillators are excellent choices for use as clock references in small, battery-powered devices such as wearable and Internet of Things (IoT) devices as well as in under-hood applications where superior shock and vibration resistance is paramount.

- 1.6 × 1.2 mm, 25% board space saving
- 50% less power consumption than the lowest-power crystal oscillator
- 5× better vibration tolerance, 500× better mechanical shock tolerance
- High stability over a wide temperature range (± 25 ppm over -40 to 85°C)
- AEC-Q100 reliability capable
- Online and field programmable

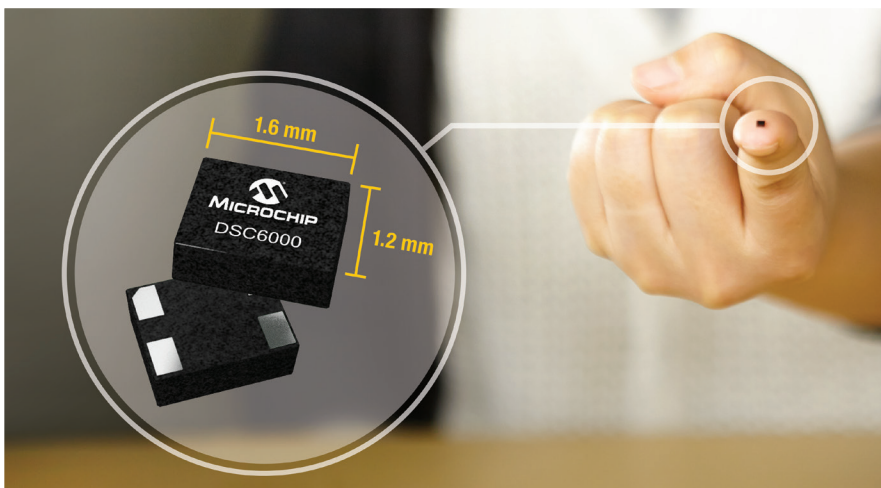

Online and Field Tools



Getting started is easy with any of the online and field tools designed to jump start your application development.

Online

ClockWorks® Configurator

ClockWorks Configurator is an easy-to-use online tool that allows users to create an orderable part number and get samples within a few weeks. Simply go to <http://clockworks.microchip.com/timing> and start configuring your oscillators and clock generators.

- Intuitive graphical user interface makes device selection easier
- Alerts you of a potential frequency conflict
- Provides instant datasheets
- Dashboard supports sample and device tracking
- Perform search by part number, design ID or sample ID
- Need help? Go to www.microchip.com/ClockWorksConfiguratorVideo to watch a short video on ClockWorlds Configurator.

Evaluation Boards

Microchip's ROHS evaluation boards are simple, easy to use and provide a reference standard of performance for the product. They come with full documentation. To purchase these boards, visit www.microchipDIRECT.com or contact any Microchip sales representative or authorized distributor.



ClockWorks®
CONFIGURATOR

Field

TimeFlash 2 MEMS Oscillators Field Programming Kit

The TimeFlash 2 Programmer allows users to rapidly program Microchip's field-programmable MEMS oscillator to a custom frequency in seconds, minimizing design time by enabling fast prototyping and testing. Our MEMS oscillators are available in industry-standard packages that are drop-in replacements to standard crystal oscillators.

- Custom frequencies in seconds with immediate design verification
- Supports all Microchip MEMS oscillator package sizes
- Supports CMOS, LVPECL, LVDS and HCSL output types
- Easy-to-use interface with auto software update

Blank parts and socket cards are available separately. For more information, please visit www.microchip.com/timeflash.

Need help? Go to www.microchip.com/TimeFlashFieldProgrammingKit-Video to watch a short video on the TimeFlash Programmer.



Complete Solution Enables Fast Prototyping



Configure to Any Frequency, Anywhere

TCG_help@microchip.com

microchip.com/oscillators



SMART | CONNECTED | SECURE

Microchip Technology Inc. | 2355 W. Chandler Blvd. | Chandler AZ, 85224-6199 | microchip.com