

SA.45s Space CSAC

Chip-Scale Atomic Clock



CSAC

Microsemi invented portable atomic timekeeping with the world's first family of miniature and chip scale atomic clocks.

Choose CSAC for best-in-class stability, size, weight, and power consumption.

Features

- Power consumption <120 mW
- Less than 17 cc volume, 1.6" × 1.39" × 0.45"
- Radiation-tolerant: 20 krad
- SEL, SEU tested to 64 MeV-cm²/mg (contact factory for details)
- 10 MHz CMOS-compatible output
- 1PPS output and 1PPS input for synchronization
- RS-232 interface for monitoring and control
- Short-term stability (Allan Deviation) of 3.0×10^{-10} at TAU = 1 sec

The Microsemi SA.45s Commercial Space Chip-Scale Atomic Clock's (CSAC) potential for low size, weight, and power (SWaP), and high timing performance at relatively low cost makes it very attractive for low Earth orbit (LEO) applications. In addition to being a stand-alone atomic clock with a 10 MHz output, the CSAC also has a 1PPS output and can be disciplined with a 1PPS input. The Space CSAC retains this functionality and is a timing module that can be disciplined with a GPS-derived 1PPS input.

The SA.45s provides 10 MHz and 1PPS outputs at standard CMOS levels, with short-term stability (Allan Deviation) of 3.0×10^{-10} at TAU = 1 sec, typical long-term aging of $<9 \times 10^{-10}$ /month, and maximum frequency change of $\pm 5 \times 10^{-10}$ over an operating temperature range of -10°C to 70°C .

A standard CMOS-level RS-232 serial interface is built into the SA.45s. This is used to control and calibrate the unit and to provide a comprehensive set of status monitors. The interface is also used to set and read the CSAC's internal time-of-day clock.


Applications

- Satellite timing and frequency control
- Satellite clock reference
- Assured position, navigation, and timing (PNT)
- Atomic clock accuracy
- Satellite cross-linking

SA.45s Space CSAC

Chip-Scale Atomic Clock


Mechanical Interface

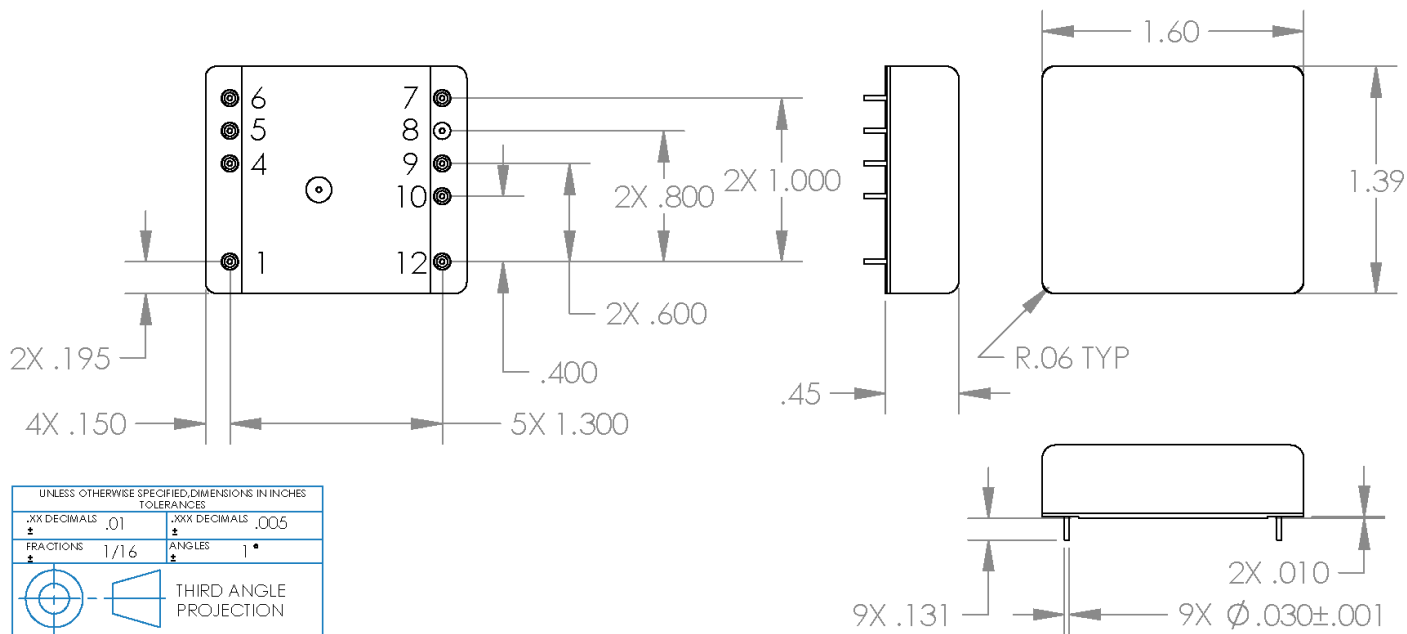

Pin Description

Pin Number	ID
1	Tune
2	N/A
3	N/A
4	BITE
5	Tx
6	Rx
7	V _{cc}
8	GND
9	1 PPS IN
10	1 PPS OUT
11	N/A
12	10 MHz OUT

Bottom View

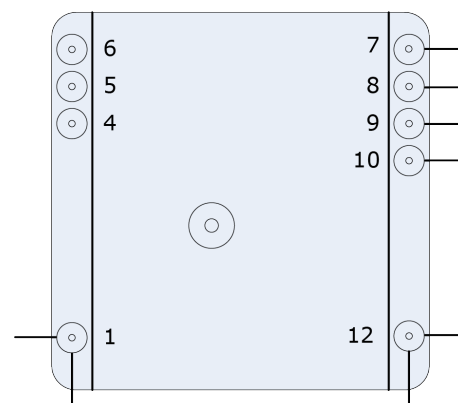

SA.45s Space CSAC

Chip-Scale Atomic Clock

Specifications¹

Electrical

RF Output

- Frequency 10 MHz
- Format CMOS
- Amplitude 0 V to V_{CC}
- Load impedance 1 MΩ
- Quantity 1

1PPS Output

- Rise/fall time (10%–90%) at load capacitance 10 pF <10 ns
- Pulse width 100 μs
- Level 0 V to V_{CC}
- Logic high (V_{OH}) min 2.80 V
- Logic low (V_{OL}) max 0.30 V
- Load impedance 1 MΩ
- Quantity 1

1PPS Input

- Format Rising edge
- Low level <0.5 V
- High level 2.5 V to V_{CC}
- Input impedance 1 MΩ
- Quantity 1

Serial Communications

- Protocol RS232
- Format CMOS 0 V to V_{CC}
- Tx/Rx impedance 1 MΩ
- Baud rate 57600

Built-In Test Equipment (BITE) Output

- Format CMOS 0 V to V_{CC}
- Load impedance 1 MΩ
- Logic 0= Normal operation
1= Alarm

Power Input

- Operating <120 mW
- Warmup <140 mW
- Input voltage (V_{CC}) 3.3 ± 0.1 V_{DC}

Environmental

- Operating temperature –10 °C to 70 °C
- Maximum frequency change over operating temp range (maximum rate of change 0.5 °C per minute) ±5 × 10⁻¹⁰
- Magnetic sensitivity (≤2.0 Gauss) ±9 × 10⁻¹¹/Gauss
- Radiated emissions Compliant to FCC part 15, Class B, when mounted properly onto host PCB
- Vibration Maintains lock under MIL-STD-810, Method 514.5, Procedure 1, 7.7 g_{rms}
- Humidity 0%–95% RH per MIL-STD-810, Method 507.4

Storage and Transport (Non-operating)

- Temperature –55 °C to 85 °C
- Vibration MIL-STD-810, Method 514.5, Procedure 1, 7.7 g_{rms}
- Shock (1 ms half-sine) 1000 g

Performance Parameters

- Warm-up time <180 s
- Analog tuning Range: ±2.2 × 10⁻⁸
Resolution: 1 × 10⁻¹¹
Input: 0 V–2.5 V into 100 kΩ
- Digital tuning Range: ±1 × 10⁻⁶
Resolution: 1 × 10⁻¹²

Phase Noise (SSB)

Frequency	CSAC
1 Hz	<–50 dBc/Hz
10 Hz	<–70 dBc/Hz
100 Hz	<–113 dBc/Hz
1 kHz	<–128 dBc/Hz
10 kHz	<–135 dBc/Hz
100 kHz	<–140 dBc/Hz

Frequency Accuracy

- Maximum offset at shipment ±5 × 10⁻¹¹
- Maximum retrace (48 hrs off) ±5 × 10⁻¹⁰
- 1 PPS sync ±100 ns

¹At input voltage V_{CC} = 3.3 V_{DC} and ambient temperature = 25 °C, unless otherwise specified.

SA.45s Space CSAC

Chip-Scale Atomic Clock

Aging

Type ²	SA.45s ³
Monthly	$<9 \times 10^{-10}$
Yearly	$<1 \times 10^{-8}$

²After 30 days of continuous operation.

³All CSAC units are tested for aging specs as per the datasheet and meet the specs at the time of shipment. However, continuous operation of CSAC over extended period of time may yield unpredictable aging performance, resulting in failure to meet the aging specs and may not be suitable for certain applications.

Short-Term Stability (Allan Deviation)

Type	SA.45s
$\tau = 1 \text{ s}$	3×10^{-10}
$\tau = 10 \text{ s}$	1×10^{-10}
$\tau = 100 \text{ s}$	3×10^{-11}
$\tau = 1000 \text{ s}$	1×10^{-11}

Radiation Tolerance

Type	SA.45s
TID	20 krad, $<5 \times 10^{-10}$ frequency offset change
SEL, SEU	Tested to 64 MeV-cm ² /mg (contact factory for details)

Physical

- Weight $<35 \text{ g}$ ($<1.23 \text{ oz}$)
- Size $1.6" \times 1.39" \times 0.45"$
- MTBF $>100,000 \text{ hours}$

Solder

Hand solder using 63/37 tin/lead solder with maximum soldering tip of 329 °C (625 °F).

Ordering Information

Part Number	Description	Output Frequency
090-02984-007	Space chip-scale atomic clock	10 MHz



Microsemi Corporate Headquarters

One Enterprise, Aliso Viejo, CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

©2018 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.