

**TR0034**  
**Test Report**  
**PolarFire FPGA CoreJESD204BRX Interoperability for**  
**AD9680**



**Microsemi Corporate Headquarters**  
One Enterprise, Aliso Viejo,  
CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Fax: +1 (949) 215-4996  
Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

© 2018 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

#### About Microsemi

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

# Contents

---

<b>1</b>	<b>Revision History</b>	<b>1</b>
1.1	Revision 1.0	1
<b>2</b>	<b>PolarFire FPGA CoreJESD204BRX Interoperability for AD9680 Test Report</b>	<b>2</b>
2.1	References	2
2.2	Scope	2
2.3	Test Requirements	2
2.3.1	Hardware Requirements	2
2.3.2	Software Requirements	2
2.3.3	Source Files	2
2.4	Interoperability Test Setup	3
2.5	Interoperability Test Settings	5
2.6	AD9680-1250EBZ Interoperability Tests	5
2.6.1	Test 1: Data Link Layer—Code Group Synchronization	6
2.6.2	Test 2: Data Link Layer—Initial Lane Alignment Sequence	6
2.6.3	Test 3: Receiver Transport Layer	7
2.6.4	Test 4: Descrambling	7
2.6.5	Test 5: Deterministic Latency	7

# Figures

---

Figure 1	PolarFire Evaluation Kit .....	3
Figure 2	AD9680-1250EBZ .....	4
Figure 3	Hardware Setup for Interoperability Testing with AD9680-1250EBZ .....	4
Figure 4	Block Diagram of Interoperability Tests .....	5

# Tables

---

Table 1	Device Requirements . . . . .	2
Table 2	Configuring CoreJESD204BRX and AD9680 . . . . .	5
Table 3	Data Link Layer—Code Group Synchronization Test Results . . . . .	6
Table 4	Data Link Layer—Initial Lane Alignment Sequence Test Results . . . . .	6
Table 5	Receiver Transport Layer Test Results . . . . .	7
Table 6	Descrambling Test Results . . . . .	7
Table 7	JESD204B Deterministic Latency Measurement Test Results – Subclass 1 Mode . . . . .	7

# 1 Revision History

---

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the current publication.

## 1.1 Revision 1.0

The first publication of this document.

## 2 PolarFire FPGA CoreJESD204BRX Interoperability for AD9680 Test Report

---

Microsemi provides solutions for interfacing with analog-to-digital converter (ADC) and digital-to-analog converter (DAC) devices using the JESD204B JEDEC standards. These solutions are provided as DirectCore soft IPs (CoreJESD204BRX and CoreJESD204BTX) and interfaced with the transceiver interface of PolarFire® FPGA devices. This report provides the interoperability test results performed on a third-party ADC. The interoperability test results describe the JESD204B link parameters, hardware test setup, equipment used, and final test report of Microsemi DirectCore—CoreJESD204BRX.

### 2.1 References

- *CoreJESD204BRX IP Handbook*
- *CoreJESD204BTX IP Handbook*
- *UG0677: PolarFire FPGA Transceiver User Guide*
- *AD9680-1250EBZ*
- *Identify ME User Guide*

### 2.2 Scope

This report describes the hardware setup used for interoperability testing and reporting of the test results of JESD204B link. The following table shows the configuration of the tested device.

**Table 1 • Device Requirements**

Device	Link Rate (Gbps)	Link Width	Subclass
AD9680	12.5	×2	0, 1

### 2.3 Test Requirements

The following are the hardware and software required for interoperability tests.

#### 2.3.1 Hardware Requirements

- PolarFire Evaluation Kit
- AD9680-1250EBZ
- Function generator
- 110 V to 240 V AC to 12-V DC-Power adapter
- 3 SMA cables

#### 2.3.2 Software Requirements

- Libero® SoC PolarFire
- Configurator GUI

#### 2.3.3 Source Files

For design files, contact Microsemi Tech Support Team at [soc\\_tech@microsemi.com](mailto:soc_tech@microsemi.com).


## 2.4 Interoperability Test Setup

The interoperability test is performed on the PolarFire Evaluation Kit board with the MPF300TS-1FCG1152I device and analog device, AD9680-1250EBZ module, as shown in the following figures. AD9680-1250EBZ is used to evaluate the AD9680. It is connected to the FMC HPC connector of PolarFire Evaluation Kit.

AD9680 is a dual, 14-bit, and 1.25 GSPS/1 GSPS/820 MSPS/500 MSPS ADC. The device has an on-chip buffer and sample-and-hold circuit designed for low power, small size, and ease of use. This device is designed for sampling wide bandwidth analog signals of up to 2 GHz. The device supports the JESD204B serial interface with data rates up to 12.5 Gbps. The design for the test is developed using the Libero SoC PolarFire by instantiating the CoreJESD204BRX IP and other required IP cores in SmartDesign. The register configuration of AD9680 is done using Microsemi's serial file writer GUI.

The following figure shows the hardware setup.


**Figure 1 • PolarFire Evaluation Kit**

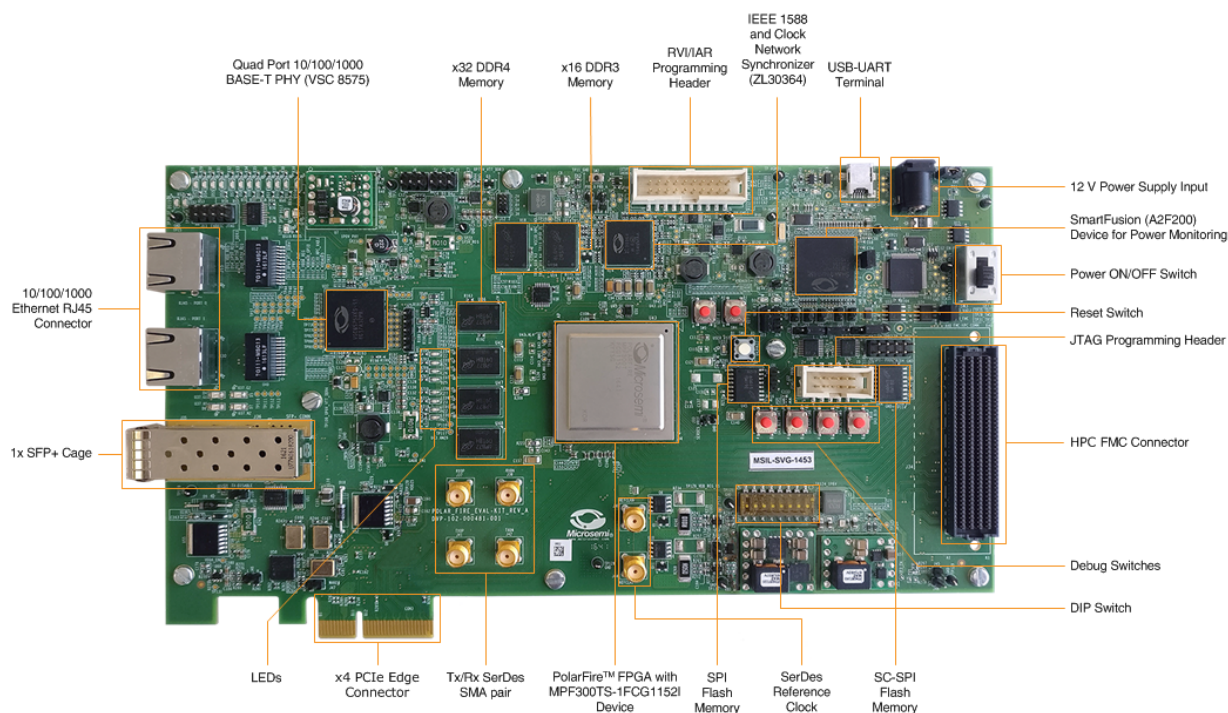




The following figure shows the AD9680-1250EBZ evaluation board.

**Figure 2 • AD9680-1250EBZ**

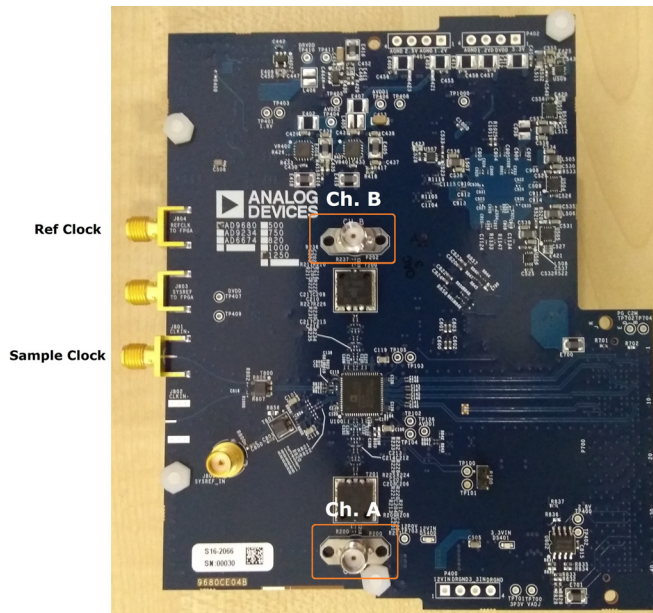


The following figure shows the hardware setup for interoperability tests.

**Figure 3 • Hardware Setup for Interoperability Testing with AD9680-1250EBZ**

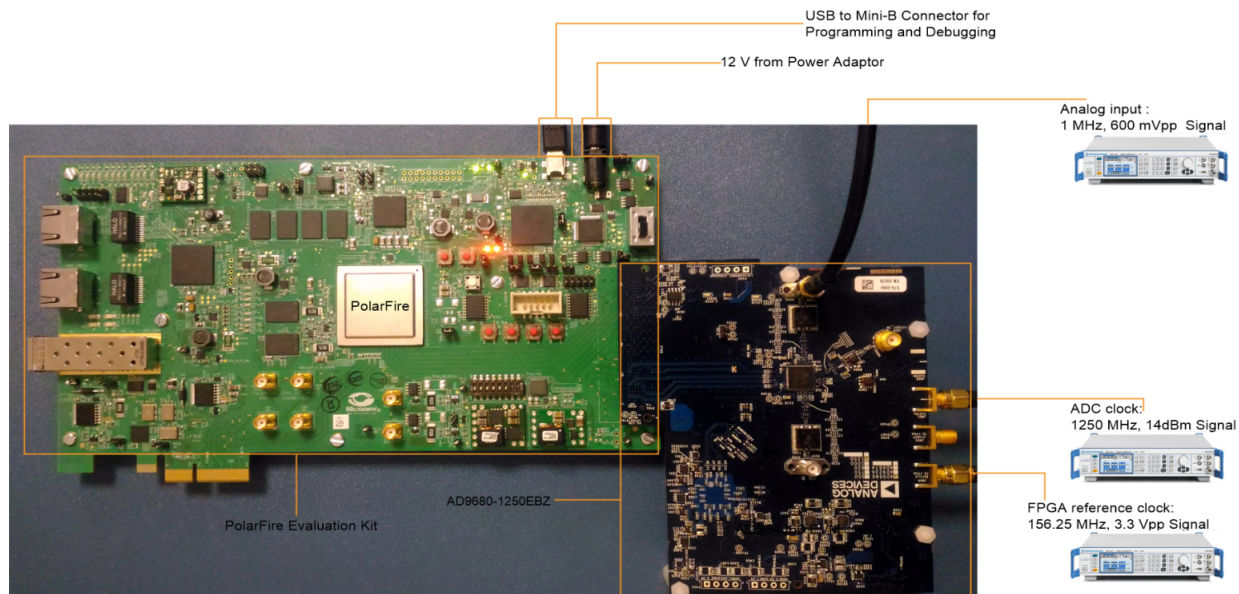

The following block diagram illustrates how signals flow in the hardware setup for interoperability tests.

**Figure 4 • Block Diagram of Interoperability Tests**

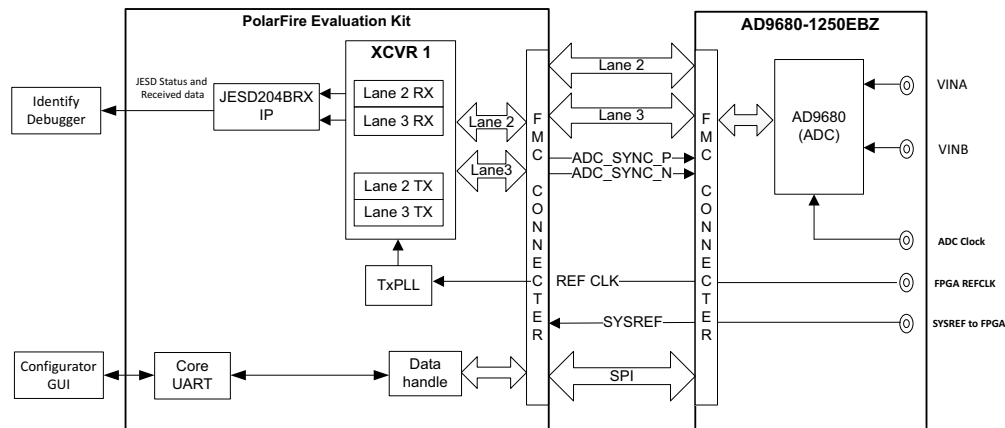

## 2.5 Interoperability Test Settings

CoreJESD204BRX and AD9680 are configured, as shown in the following table.

**Table 2 • Configuring CoreJESD204BRX and AD9680**

Parameter	CoreJESD204BRX	ADC-AD9680	Description
SCR	0/1	0/1	Scramble enable/disable
L	2	2	Lanes
F	2	2	Octets per frame
K	16	16	Frames per multi-frame
M	1	1	Converters
CS	0	0	Control bits per sample
N	16	16	Sample resolution
N'	16	16	Sample envelope
S	2	2	Samples per converter per frame
HD	0	0	High density mode
CF	0	0	Control bits per frame
SUBCLASSV	0/1	0/1	0x0/0x1

## 2.6 AD9680-1250EBZ Interoperability Tests

The following interoperability tests were performed on CoreJESD204BRX and ADC-AD9680.

- [Test 1: Data Link Layer—Code Group Synchronization](#), page 6
- [Test 2: Data Link Layer—Initial Lane Alignment Sequence](#), page 6
- [Test 3: Receiver Transport Layer](#), page 7
- [Test 4: Descrambling](#), page 7
- [Test 5: Deterministic Latency](#), page 7

## 2.6.1 Test 1: Data Link Layer—Code Group Synchronization

On link startup, the receiver issues a synchronization request and the transmitter emits comma characters /K/ = /K28.5/. Identify Debugger was used to monitor the operation of the receiver data link layer.

The following table shows the data link layer-code group synchronization (CGS) test results.

**Table 3 • Data Link Layer—Code Group Synchronization Test Results**

Test Case	Objective	Description	Passing Criteria	Results
ADC1.1	Check if the receiver asserts SYNC_N signal when the link was down.	CoreJESD204BRX_0 -> SYNC_N signal was observed in Identify Debugger.	SYNC_N was low.	Passed
ADC1.2	Check if SYNC_N request was de-asserted on receiving at least four successive /K/ characters.	CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], and SYNC_N signals were observed in Identify Debugger.	K28.5 or /K/ character (0 ×BC) was observed on DATA_OUT, and SYNC_N was de-asserted on receiving at least four successive /K/ characters.	Passed
ADC1.3	Check the full code group synchronization at receiver on receiving another four successive 8B/10B characters.	CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], SYNC_N, and CGS_ERR[3:0] signals were observed in Identify Debugger.	CGS errors were not asserted.	Passed

## 2.6.2 Test 2: Data Link Layer—Initial Lane Alignment Sequence

The following table shows the data link layer—initial lane alignment sequence (ILAS) test results.

**Table 4 • Data Link Layer—Initial Lane Alignment Sequence Test Results**

Test Case	Objective	Description	Passing Criteria	Results
ADC2.1	Check if the ILA phase starts after the CGS phase.	CoreJESD204BRX_0-> DATA_OUT_0[31:0], DATA_OUT_1[31:0], SOMF_0[3:0], SOMF_1[3:0], SOF_0[3:0], SOF_1[3:0], signals were observed in Identify Debugger.	Multi-frame starts with 0×1C and was aligned to SOMF_0[3:0] and SOMF_1[3:0].	Passed
ADC2.2	Check the JESD configuration data in the second multi-frame	CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], SOMF_0[3:0], SOMF_1[3:0], SOF_0[3:0], SOF_1[3:0], and LINK_CD_ERROR[3:0] signals were observed in Identify Debugger.	Observe the second multi-frame that starts with 0×1C followed by 0×9C and JESD204B configuration data.	Passed

## 2.6.3 Test 3: Receiver Transport Layer

The following table shows the receiver transport layer test results.

**Table 5 • Receiver Transport Layer Test Results**

Test Case	Objective	Description	Passing Criteria	Results
ADC3.1	Check data integrity in test mode	ADC was configured in long transport layer test pattern mode. CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], signals were observed in Identify Debugger	Received signal correlates with the transport layer test pattern.	Passed
ADC3.2	Check data integrity in normal mode	ADC was configured in normal mode. CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], signals were observed in Identify Debugger.	Received signal correlates with the input signal given for ADC sampling.	Passed

## 2.6.4 Test 4: Descrambling

Scrambler is enabled in ADC and descrambler is enabled in CoreJESD204BRX IP. The following table shows the descrambling test results.

**Table 6 • Descrambling Test Results**

Test Case	Objective	Description	Passing Criteria	Results
ADC4.1	Check descrambler functionality	ADC was configured in normal mode. CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], signals were observed in Identify Debugger.	Received signal (monitored in identify tool) correlates with the analog sine wave input given for ADC sampling.	Passed

## 2.6.5 Test 5: Deterministic Latency

CoreJESD204BRX IP and AD9680 were configured in Subclass 1 mode. The following table shows the JESD204B deterministic latency measurement test results.

**Table 7 • JESD204B Deterministic Latency Measurement Test Results – Subclass 1 Mode**

Test Case	Objective	Description	Passing Criteria	Results
ADC5.1	Check local multi-frame counter (LMFC) alignment	CoreJESD204BRX_0 -> clkgen_lmfc and SYSREF_IN signals were observed in Identify Debugger.	SYSREF_IN aligned to clkgen_lmfc.	Passed
ADC5.2	SYSREF capture	CoreJESD204BRX_0 -> c2l_mf_phase, and SYSREF_IN signals were observed in Identify Debugger.	LMFC counter restarts after the SYSREF_IN capture.	Passed

**Table 7 • JESD204B Deterministic Latency Measurement Test Results – Subclass 1 Mode (continued)**

Test Case	Objective	Description	Passing Criteria	Results
ADC5.3	Check latency from start de-assertion of SYNC_N to first user data output.	Check Latency was fixed for every link reset/initialization.	Latency must be the same for link reset/initialization.	Passed
ADC5.4	Check the data latency during user data phase.	Check if the data latency was fixed during the user data phase. CoreJESD204BRX_0 -> DATA_OUT_0[31:0], DATA_OUT_1[31:0], signals were observed in Identify Debugger.	The user data is seen without distortion.	Passed