


REV	DESCRIPTION	DATE	PREP	APPD
B	CO-27548	3/24/17	DF/SM	LT

--

 <b>Microsemi</b> Power Matters.™ MOUNT HOLLY SPRINGS, PA 17065	<b>Oscillator Specification, Hybrid VCXO</b> AC MOS, 9x14 mm, J-Lead Hi-Rel Standard
---	--

THE RECORD OF APPROVAL FOR THIS DOCUMENT IS MAINTAINED ELECTRONICALLY WITHIN THE ERP SYSTEM	CODE IDENT NO	SIZE	DWG. NO.	REV
	<b>00136</b>	<b>A</b>	DOC206218	B

UNSPECIFIED TOLERANCES: N/A	SHEET 1 OF 19
-----------------------------	---------------

## 1. SCOPE

- 1.1 General. This specification defines the design, assembly and functional evaluation of high reliability, VCXO's produced by Vectron International. Devices delivered to this specification represent the standardized Parts, Materials and Processes (PMP) Program developed, implemented and certified for advanced applications and extended environments.
- 1.2 Applications Overview. The designs represented by these products were primarily developed for the MIL-Aerospace community. The lesser Design Pedigrees and Screening Options imbedded within DOC206218 bridge the gap between Space and COTS hardware by providing custom hardware with measures of mechanical, assembly and reliability assurance needed for Military or Ruggedized COTS environments.

## 2. APPLICABLE DOCUMENTS

- 2.1 Specifications and Standards. The following specifications and standards form a part of this document to the extent specified herein. The issue currently in effect on the date of quotation will be the product baseline, unless otherwise specified. In the event of conflict between the texts of any references cited herein, the text of this document shall take precedence.

### Military

MIL-PRF-55310	Oscillators, Crystal Controlled, General Specification For
MIL-PRF-38534	Hybrid Microcircuits, General Specification For

### Standards

MIL-STD-202	Test Method Standard, Electronic and Electrical Component Parts
MIL-STD-883	Test Methods and Procedures for Microelectronics

### Other

DOC206251	Test Specification, DOC206218 Hybrids, Hi-Rel Standard
QSP-90100	Quality Systems Manual, Vectron International
DOC011627	Identification Common Documents, Materials and Processes, Hi-Rel XO
DOC203982	DPA Specification
QSP-91502	Procedure for Electrostatic Discharge Precautions

## 3. GENERAL REQUIREMENTS

- 3.1 Classification. All devices delivered to this specification are of hybrid technology conforming to Type 2, Class 2 of MIL-PRF-55310. Primarily developed as a Class S equivalent specification, options are imbedded within it to also produce Class B, Engineering Model and Ruggedized COTS devices. Devices carry a Class 2 ESDS classification per MIL-PRF-38534.
- 3.2 Item Identification. See paragraph 7.1 for part number configuration.
- 3.3 Absolute Maximum Ratings.
- |   |                    |
|---|--------------------|
| a. Supply Voltage Range ( $V_{CC}$ ):       | -0.5Vdc to +7.0Vdc |
| b. Storage Temperature Range ( $T_{STG}$ ): | -65°C to +125°C    |

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>2</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- c. Junction Temperature ( $T_j$ ): +175°C
- d. Lead Temperature (soldering, 10 seconds): +300°C
- e. Output Source/Sink Current: ±70 mA

3.4 Design, Parts, Materials and Processes, Assembly, Inspection and Test.

3.4.1 Design. The ruggedized designs implemented for these devices are proven in military and space applications under extreme environments. The design utilizes a 4-point crystal mount in compliment with Established Reliability (MIL-ER) componentry. When specified, radiation hardening up to 100krad(Si) (RHA level R) can be included without altering the device’s internal topography.

3.4.1.1 Design and Configuration Stability. Barring changes to improve performance by reselecting passive chip component values to offset component tolerances, there will not be fundamental changes to the design or assembly or parts, materials and processes after first product delivery of that item without written approval from the procuring activity.

3.4.1.2 Environmental Integrity. Designs have passed the environmental qualification levels of MIL-PRF-55310.

3.4.2 Prohibited Parts, Materials and Processes. The items listed are prohibited for use in high reliability devices produced to this specification.


- a. Gold metallization of package elements without a barrier metal.
- b. Zinc chromate as a finish.
- c. Cadmium, zinc, or pure tin external or internal to the device.
- d. Plastic encapsulated semiconductor devices.
- e. Ultrasonically cleaned electronic parts.
- f. Heterojunction Bipolar Transistor (HBT) technology.
- g. ‘getter’ materials

3.4.3 Assembly. Manufacturing utilizes standardized procedures, processes and verification methods to produce MIL-PRF-55310 Class S / MIL-PRF-38534 Class K equivalent devices. MIL-PRF-38534 Group B Option 1 in-line inspection is included on radiation hardened part numbers to further verify lot pedigree. Traceability of all components and production lots are in accordance with MIL-PRF-38534, as a minimum. Tabulated records are provided as a part of the deliverable data package. Devices are handled in accordance with Vectron document QSP-91502 (Procedure for Electrostatic Discharge Precautions).

3.4.4 Inspection. The inspection requirements of MIL-PRF-55310 apply to all devices delivered to this document. Inspection conditions and standards are documented in accordance with the Quality Assurance, ISO-9001 and AS9100 derived, System of QSP-90100.

3.4.5 Test. The Screening test matrix of Table 4 is tailored for selectable-combination testing to eliminate costs associated with the development/maintenance of device-specific documentation packages while maintaining performance integrity.

3.4.6 Marking. Device marking shall be in accordance with the requirements of MIL-PRF-55310.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>3</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

3.4.7 Ruggedized COTS Design Implementation. Design Pedigree “D” devices (see ¶ 5.2) use the same robust designs found in the other device pedigrees. They do not include the provisions of traceability or the Class-qualified componentry noted in paragraphs 3.4.3 and 4.1.

4. DETAIL REQUIREMENTS

4.1 Components

4.1.1 Crystals. Cultured quartz crystal resonators are used to provide the selected frequency for the devices. The optional use of Premium Q swept quartz can, because of its processing to remove impurities, be specified to minimize frequency drift when operating in radiation environments. In accordance with MIL-PRF-55310, the manufacturer has a documented crystal element evaluation program.


4.1.2 Passive Components. Passive components will have the same pedigree as the die specified in paragraph 7.1. Lot evaluations are in accordance with MIL-PRF-38534 or Enhanced Element Evaluation as specified in Table 7.

4.1.3 Class S Microcircuits. Devices are assembled with a varactor diode and an ACMOS chip which are procured from wafer lots that have passed MIL-PRF-38534 Class K Lot Acceptance Tests for Class S devices. The prescribed die carries a Class 2 ESDS classification in accordance with MIL-PRF-38534. When optionally specified, further testing in accordance with MIL-PRF-55310 and MIL-PRF-38534 is performed for radiation hardness assurance and for Enhanced Element Evaluation as specified in Table 6. Those microcircuits, identified by a unique part number, are certified for 100krad(Si) total ionizing dose (TID), RHA level R (2X minimum margin). NSC, as the original 54ACT designer, rates the SEU LET at >40 MeV and SEL at >120MeV for the FACT™ family (AN-932). Vectron has conducted additional SEE testing in 2008 to verify this performance since our lot wafer testing does not include these parameters and determinations. In addition, the varactor diode is considered insensitive to TID and Single Event Effects.

4.1.3.1 Class B Microcircuits. When specified, microcircuits assembled into OS-68338 Design Pedigree letters “B” and “C” devices (¶ 5.2a) are procured from wafer lots that have passed MIL-PRF-55310 element evaluations for Class B devices.

4.1.4 Packages. Packages are procured that meet the construction, lead materials and finishes as specified in MIL-PRF-55310. All leads are Kovar with gold plating over a nickel underplate. Package lots are upscreened in accordance with the requirements of MIL-PRF-38534 as applicable.


4.1.5 Traceability and Homogeneity. All design pedigrees except option D have active device lots that are traceable to the manufacturer’s individual wafer; all other elements and materials are traceable to their manufacturer and incoming inspection lots. Design pedigrees E, R, V and X have homogeneous material. In addition, swept quartz crystals are traceable to the quartz bar and the processing details of the autoclave lot, as applicable.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>4</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

- 4.1.6 Enhanced Element Evaluation. When Design Pedigree Option “E” is specified, active and passive devices with Enhanced Element Evaluation as listed in Table 5, 6 and 7 shall be implemented for the highest reliability preference.
- 4.2 Mechanical.
- 4.2.1 Package Outline. See Figure 1.
- 4.2.2 Thermal Characteristics. The worst case thermal characteristics are found in Table 3.
- 4.3 Electrical.
- 4.3.1 Input Power. Devices are available with an input voltage of either +5.0 Vdc ( $\pm 5\%$ ) or +3.3 Vdc ( $\pm 5\%$ ). Current is measured, no load, at maximum rated operating voltage.
- 4.3.2 Temperature Range. Operating range is  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .
- 4.3.3 Absolute Pull Range. Absolute pull range is defined as the minimum guaranteed amount the VCXO can be varied about the center frequency ( $f_0$ ). It accounts for degradations including temperature stability ( $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ), aging (15 years), radiation effects, power supply variations ( $\pm 5\%$ ) and load variations ( $\pm 10\%$ ).
- 4.3.4 Frequency Aging. When tested in accordance with MIL-PRF-55310 Group B inspection, the 15-year aging projection shall not cause the minimum APR limit to be exceeded.
- 4.3.5 Operating Characteristics. Symmetrical square wave limits are dependent on the device frequency and are in accordance with Table 1. Waveform measurement points and logic limits are in accordance with MIL-PRF-55310. Start-up time is 10.0 msec. maximum.
- 4.3.6 Output Load. ACMOS (10k $\Omega$ , 15pF) test loads are in accordance with MIL-PRF-55310.

## 5. QUALITY ASSURANCE PROVISIONS AND VERIFICATION

- 5.1 Verification and Test. Device lots shall be tested prior to delivery in accordance with the applicable Screening Option letter as stated by the 15<sup>th</sup> character of the part number. Table 4 tests are conducted in the order shown and annotated on the appropriate process travelers and data sheets of the governing test procedure. For devices that require Screening Options that include MIL-PRF-55310 Group A testing, the Post-Burn-In Electrical Test and the Group A Electrical Test are combined into one operation.
- 5.1.1 Screening Options. The Screening Options, by letter, are summarized as:
- A Modified MIL-PRF-38534 Class K
  - B Modified MIL-PRF-55310 Class B Screening & Group A Quality Conformance Inspection (QCI)
  - C Modified MIL-PRF-55310 Class S Screening & Group A QCI
  - D Modified MIL-PRF-38534 Class K with Group B Aging
  - E Modified MIL-PRF-55310 Class B Screening, Groups A & B QCI

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>5</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------


- F Modified MIL-PRF-55310 Class S Screening, Groups A & B QCI
- G Modified MIL-PRF-55310 Class B Screening & Post Burn-in Nominal Electricals
- X Engineering Model (EM)

5.2 Optional Design, Test and Data Parameters. The following is a list of design, assembly, inspection and test options that can be selected or added by purchase order request.

- a. Design Pedigree (choose one as the 5<sup>th</sup> character in the part number):
  - (E) Enhanced Element Evaluation, 100krad Class S die, Premium Q Swept Quartz
  - (R) Hi-Rel design w/ 100krad Class S die, Premium Q Swept Quartz
  - (V) Hi-Rel design w/ 100krad Class S die, Non-Swept Quartz
  - (X) Hi-Rel design w/ Non-Swept Quartz, Class S die
  - (B) Hi-Rel design w/ Swept Quartz, Class B die
  - (C) Hi-Rel design w/ Non-Swept Quartz, Class B die
  - (D) Hi-Rel design w/ Non-Swept Quartz and commercial grade components
- b. Input Voltage/APR, (L) for +3.3V/±30ppm, (N) for +5.0V/±30ppm and (W) for +5.0V/±50ppm as the 14<sup>th</sup> character
- c. Frequency-Temperature Slew Test
- d. Radiographic Inspection
- e. Group C Inspection: In accordance with MIL-PRF-55310, Table VII (requires 8 destruct specimens)
- f. Group C Inspection: In accordance with MIL-PRF-38534, Table C-Xc, Condition PI (requires 8 destruct specimens – 5 pc. Life, 3 pc. RGA). Subgroup 1 fine leak test to be performed per MIL-STD-202, Method 112, Condition C.
- g. Internal Water-Vapor Content (RGA) samples and test performance
- h. MTBF Reliability Calculations
- i. Worst Case/Derating Analysis: MIL-HDBK-1547 with Tj Max = +105°C; Derated Maximum Operating Temp = Tj Max - ΔTj
- j. Deliverable Process Identification Documentation (PID)
- k. Customer Source Inspection (pre-crystal mount pre-cap, post-crystal mount pre-cap and final). Due to components being mounted underneath the crystal blank, this model number should be considered for pre-crystal mount pre-cap inspection.
- l. Destruct Physical Analysis (DPA): MIL-STD-1580 with exceptions as specified in Vectron DOC203982.
- m. Qualification: In accordance with MIL-PRF-55310, Table IV (requires 11 destruct specimens).
- n. Pre-cap photographs
- o. Hot solder dip of leads with Sn63/Pb37 solder prior to shipping

5.2.1 NASA EEE-INST-002. A combination of Design Pedigree E or R, Option F Screening, Group C Inspection in accordance with Table VII of MIL-PRF-55310 and RGA, meet the requirements of Level 1 device reliability. A combination of Design Pedigree B, Option E Screening, Radiographic Inspection, Group C Inspection in accordance with Table VII of MIL-PRF-55310 and RGA, meet the requirements of Level 2 device reliability.

5.3 Test Conditions. Unless otherwise stated herein, inspections are performed in accordance with those specified in MIL-PRF-55310 and MIL-PRF-38534, in that order. Process travelers

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>6</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

identify the applicable methods, conditions and procedures to be used. Examples of electrical test procedures that correspond to MIL-PRF-55310 requirements are shown in Table 2.

5.4 Special Test and Description.

5.4.1 Frequency-Temperature Slew. Frequency-Temperature Slew Test has been developed as an indicator of higher than normal internal water vapor content. The incremental temperature sweep from +85°C to -40°C and back to +85°C records output frequency fluctuations emulating the mass loading of moisture deposited on the crystal blank surface. Though not replacing a customer's internal water-vapor content (RGA) requirement, confidence is increased without destructively testing otherwise good devices.

5.5 Deliverable Data. The manufacturer supplies the following data, as a minimum, with each lot of devices:

- a. Completed assembly and screening lot travelers, including rework history and Certificate of Conformance.
- b. Electrical test variables data, identified by unique serial number.
- c. Frequency-Temperature Slew plots, Radiographic films, Group C data and RGA data as required by purchase order.
- d. Traceability, component LAT, enclosure LAT and RLAT (if specifically requested on the purchase order).

5.6 Discrepant Material. All MRB authority resides with the procuring activity.


5.7 Failure Analysis. Any catastrophic failure (no clocking, no current) at Post Burn-In or after will be evaluated for root cause. The customer will be notified after occurrence and upon completion of the evaluation.

6. PREPARATION FOR DELIVERY

6.1 Packaging. Devices will be packaged in a manner that prevents handling and transit damage during shipping. Devices will be handled in accordance with MIL-STD-1686 for Class 1 devices.

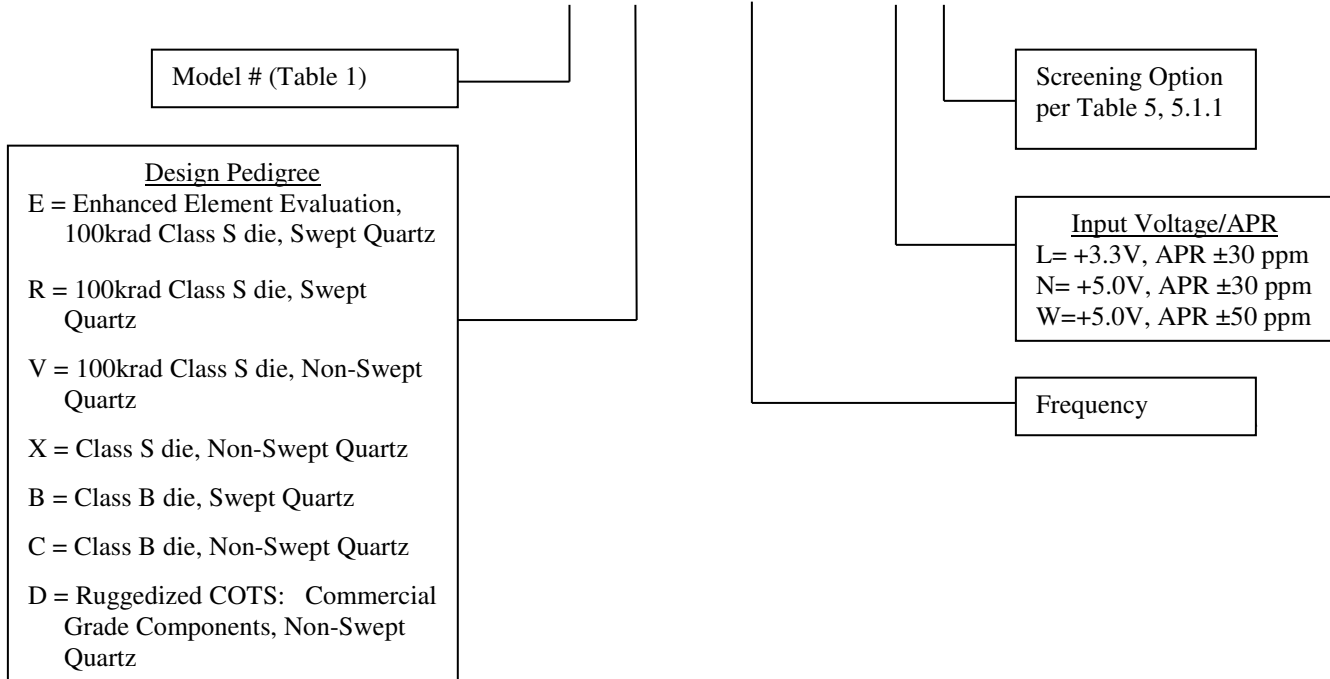
7. ORDERING INFORMATION

7.1 Ordering Part Number. The ordering part number is made up of an alphanumeric series of 15 characters. Design-affected product options, identified by the parenthetic letter on the Optional Parameters list (§ 5.2a and b), are included within the device part number.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>7</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------

The Part Number breakdown is described as:

**5116 R 10M00000 L F**



7.1.1 Model Number. The device model number is the four (4) digit number 5116.


7.1.2 Design Pedigree. Class S variants correspond to either letter “E”, “R”, “V” or “X” and are described in paragraph 5.2a. Class B variants correspond to either letter “B” or “C” and are described in paragraph 5.2a. Ruggedized COTS, using commercial grade components, corresponds to letter “D”.

7.1.3 Output Frequency. The nominal output frequency is expressed in the format as specified in MIL-PRF-55310 utilizing eight (8) characters.

7.1.4 Input Voltage (APR). “L” for +3.3V (±30ppm), “N” for +5.0V (±30ppm) and “W” for +5.0V (±50ppm) as the 14th character.

7.1.5 Screening Options. The 15<sup>th</sup> character is the Screening Option (letter A thru G or X) selected from Table 4.

7.2 Optional Design, Test and Data Parameters. Test and documentation requirements above that of the standard high reliability model shall be specified by separate purchase order line items (as listed in ¶ 5.2c thru o).

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>8</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------




Frequency Range: 1.0 MHz to 100.0 MHz				
Temperature Range: -40°C to +85°C				
Power Supply (Vcc): +3.3Vdc ±5% or +5.0Vdc ±5%				
Absolute Pull Range: ±30 ppm or ±50 ppm (+/-30 ppm only for +3.3Vdc)				
Control Voltage (Vc) Range: 0.3V to +3.0V with Vcc = +3.3V				
Control Voltage (Vc) Range: 0.5V to +4.5V with Vcc = +5.0V				
Slope: Positive				
Linearity: 10% max.				
F vs. V Gain: 45 ppm/V min. to 105 ppm/V max.				
Start-up Time: 10.0 ms max.				
Frequency Range (MHz)	Current (mA) (max. no load)		Rise / Fall Times <u>1</u> (ns max.)	Duty Cycle <u>1</u> (%)
	+5.25V	+3.465V		
1 – 15	15	8	10	45 to 55
>15 – 40	20	15	5	40 to 60
>40 – 60	35	20	5	40 to 60
>60 – 85	45	25	3	40 to 60
>85 – 100	55	35	3	40 to 60

1/. Waveform measurement points and logic limits are in accordance with MIL-PRF-55310.

**TABLE 1 - Electrical Performance Characteristics**

OPERATION LISTING	REQUIREMENTS AND CONDITIONS	VECTRON TEST PROCEDURE
@ all Electrical Tests		
Input Current (no load)	MIL-PRF-55310, Para 4.8.5.1	DOC005203
Initial Accuracy @ Ref. Temp.	MIL-PRF-55310, Para 4.8.6	DOC005194
Output Logic Voltage Levels	MIL-PRF-55310, Para 4.8.21.3	DOC005195
Rise and Fall Times	MIL-PRF-55310, Para 4.8.22	DOC005197
Duty Cycle	MIL-PRF-55310, Para 4.8.23	DOC005198
Frequency Deviation	MIL-PRF-55310, Para 4.8.31.1	DOC005194
Linearity	MIL-PRF-55310, Para 4.8.31.5	DOC005194
@ Post Burn-In Electrical only		
Overvoltage Survivability	MIL-PRF-55310, Para 4.8.4	DOC005162
Initial Freq. – Temp. Accuracy	MIL-PRF-55310, Para 4.8.10.1	DOC005199
Freq. – Voltage Tolerance	MIL-PRF-55310, Para 4.8.14	DOC005199
Start-up Time (fast/slow start)	MIL-PRF-55310, Para 4.8.29	DOC016143

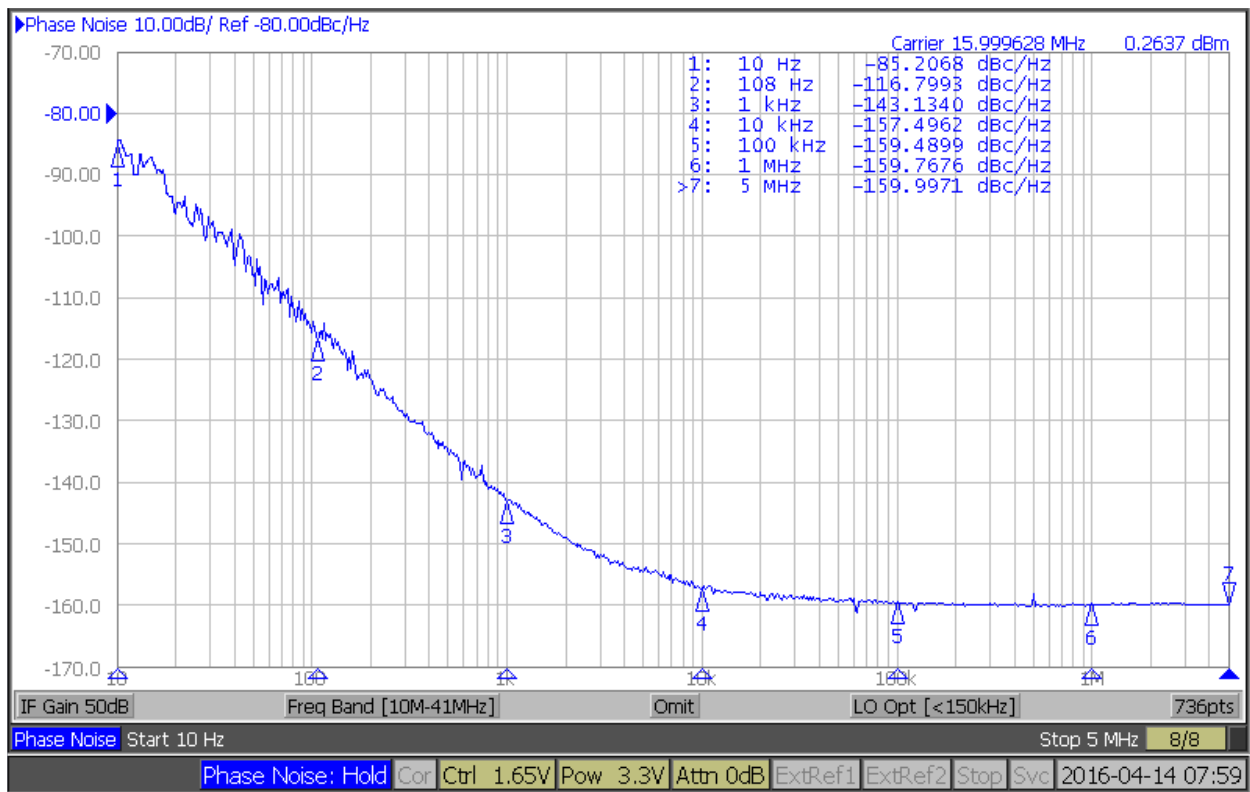
**TABLE 2 - Electrical Test Parameters**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>9</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	-------------------


Model #	Typical Thermal Resistance Junction to Case $\theta_{jc}$ ( $^{\circ}\text{C} / \text{W}$ )	$\Delta$ Junction Temp. $T_j$ ( $^{\circ}\text{C}$ @ max. $I_{cc}$ )	Typical Weight (Grams)
5116	18.77	5.42	1.2

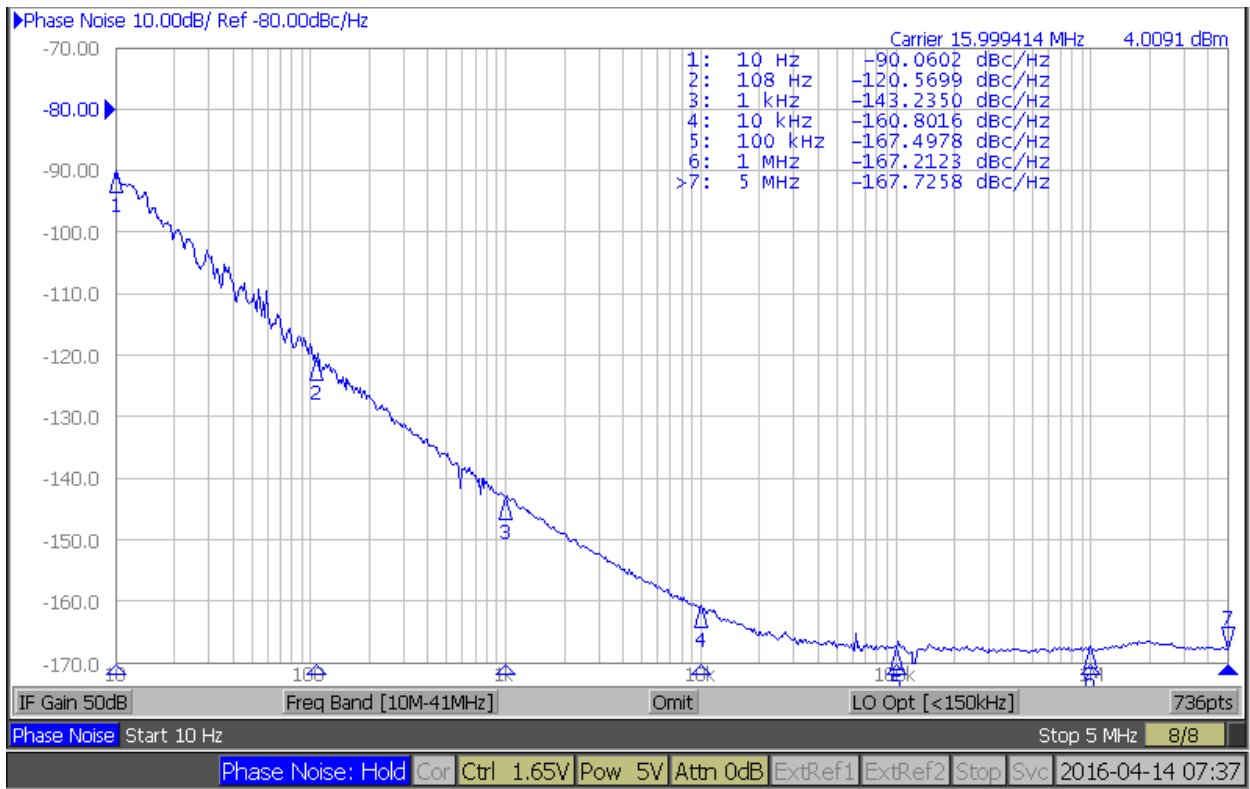
Note: The maximum power from Table 2 is used to calculate the worst case  $\Delta$  Junction Temperature.

**TABLE 3 - Typical Thermal Characteristics and Weight**

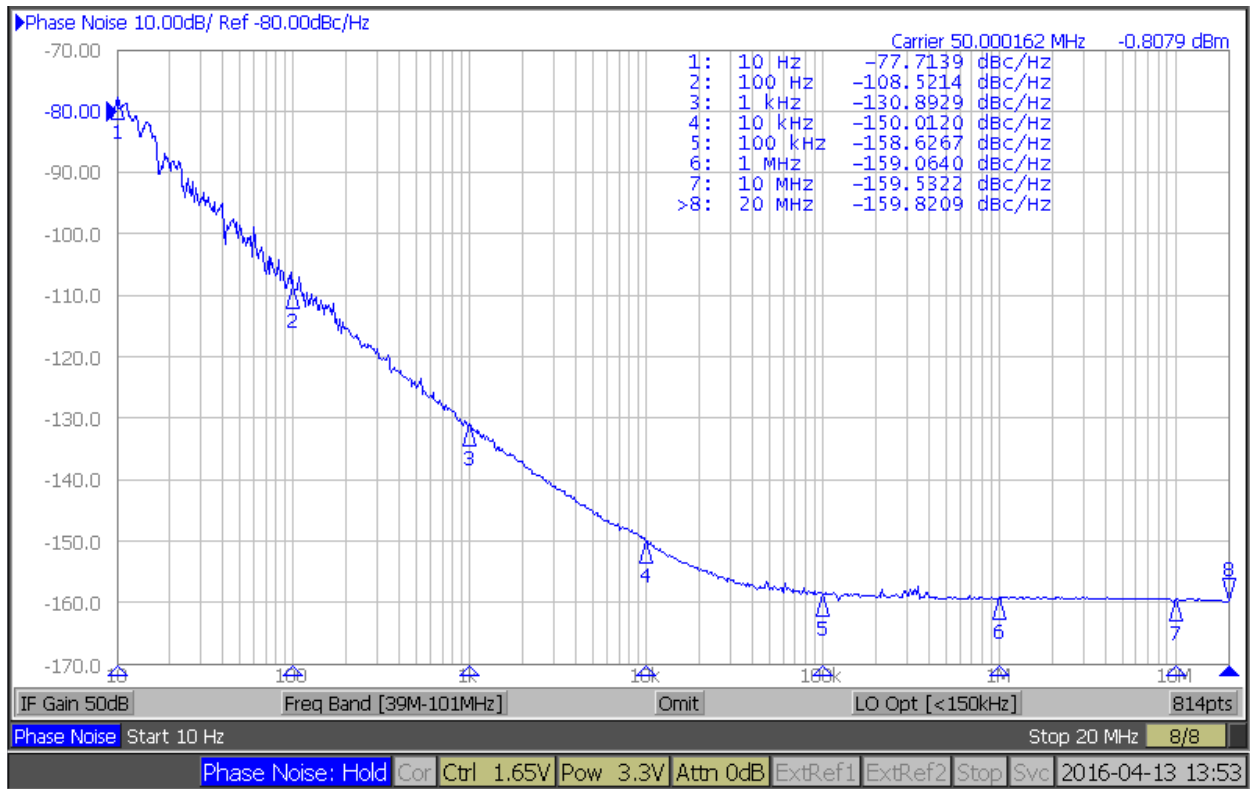


**Table 3a – Typical Phase Noise at 16MHz, 3.3V**


SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>10</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

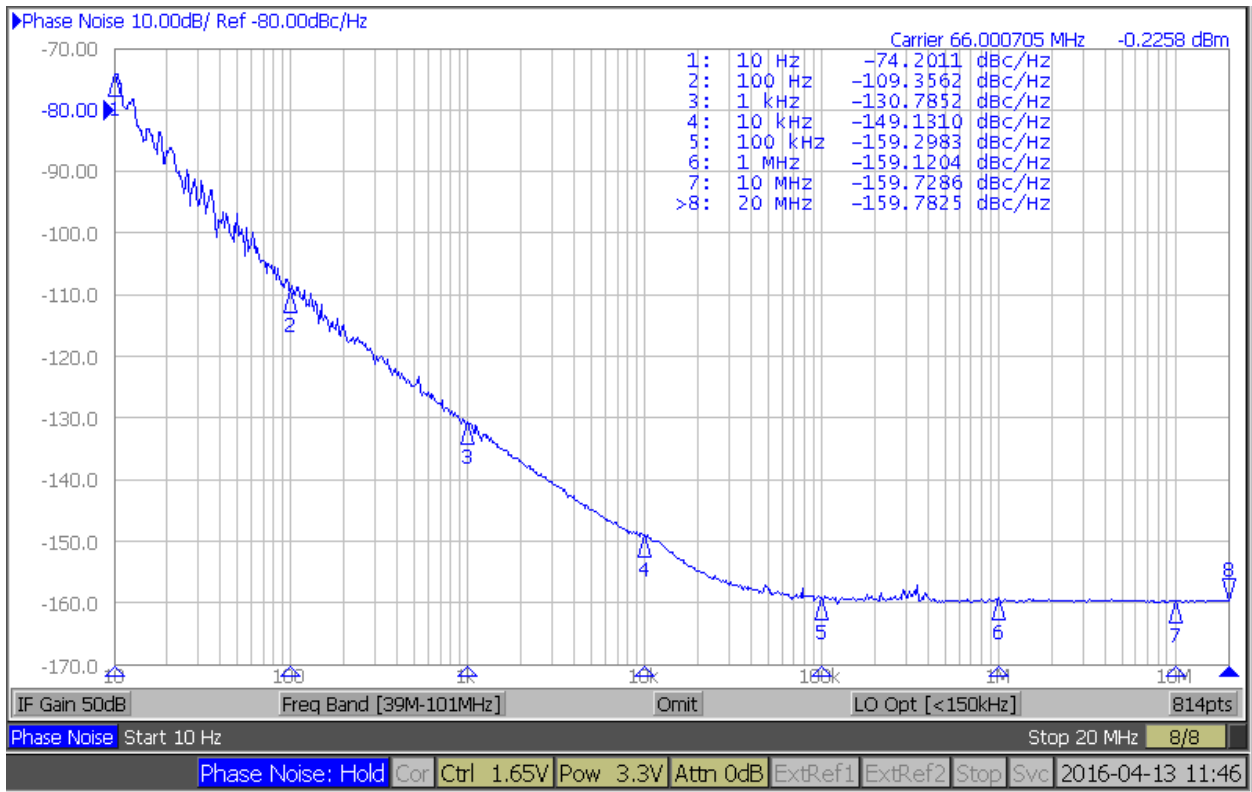


**Table 3b** – Typical Phase Noise at 16MHz, 5.0V

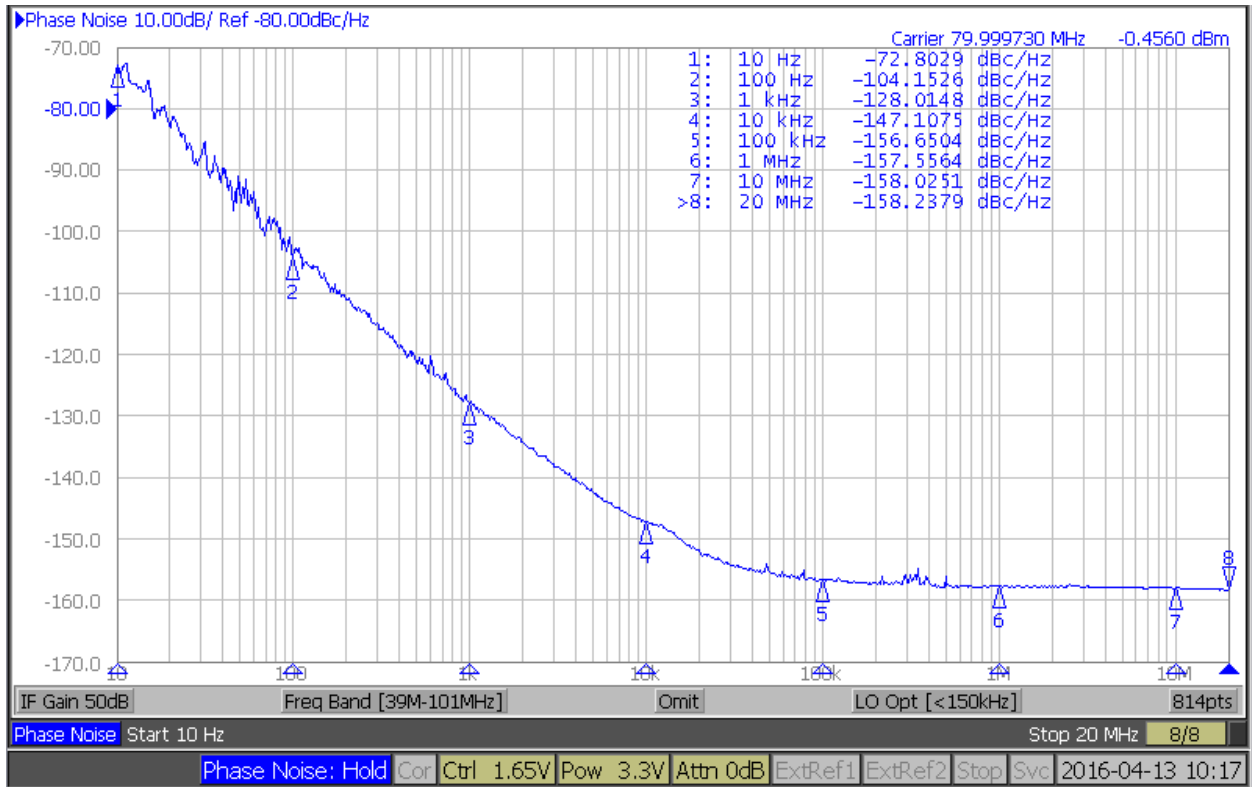


**Table 3c** – Typical Phase Noise at 50MHz, 3.3V

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>11</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

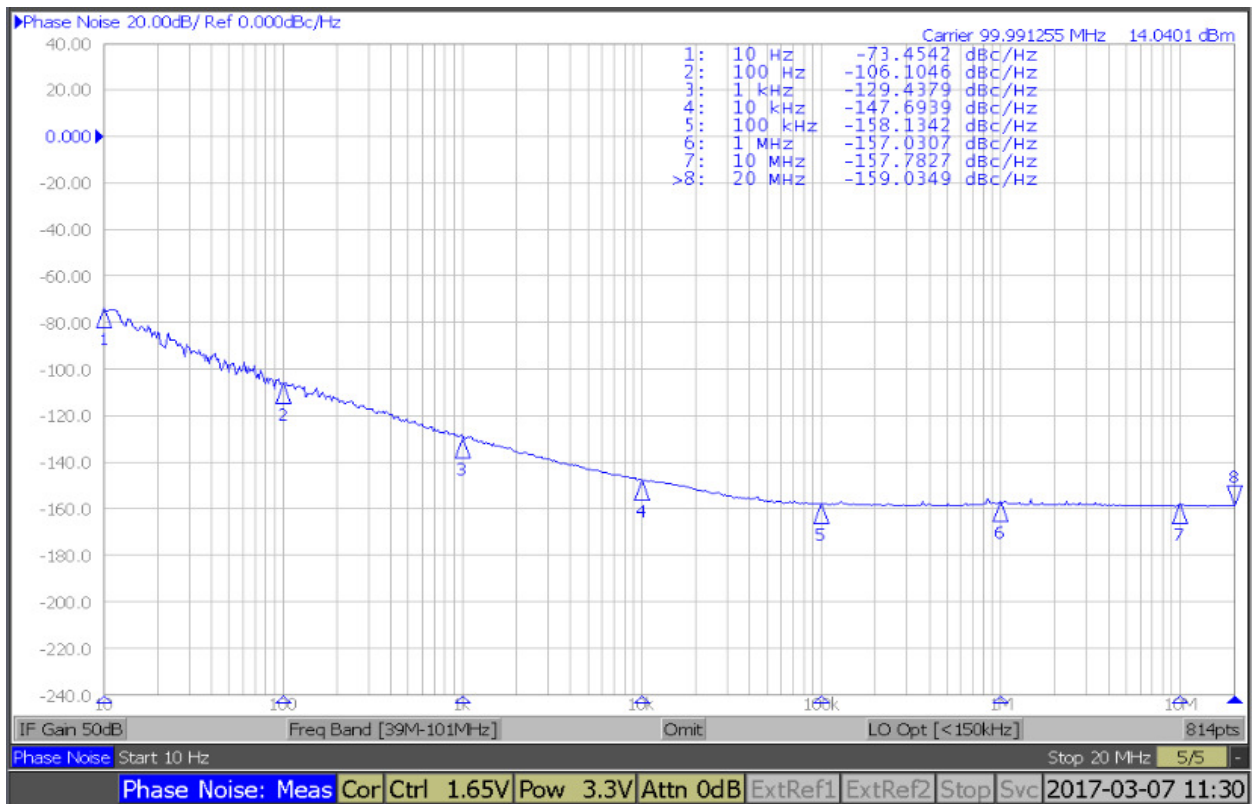


**Table 3d** – Typical Phase Noise at 66MHz, 3.3V

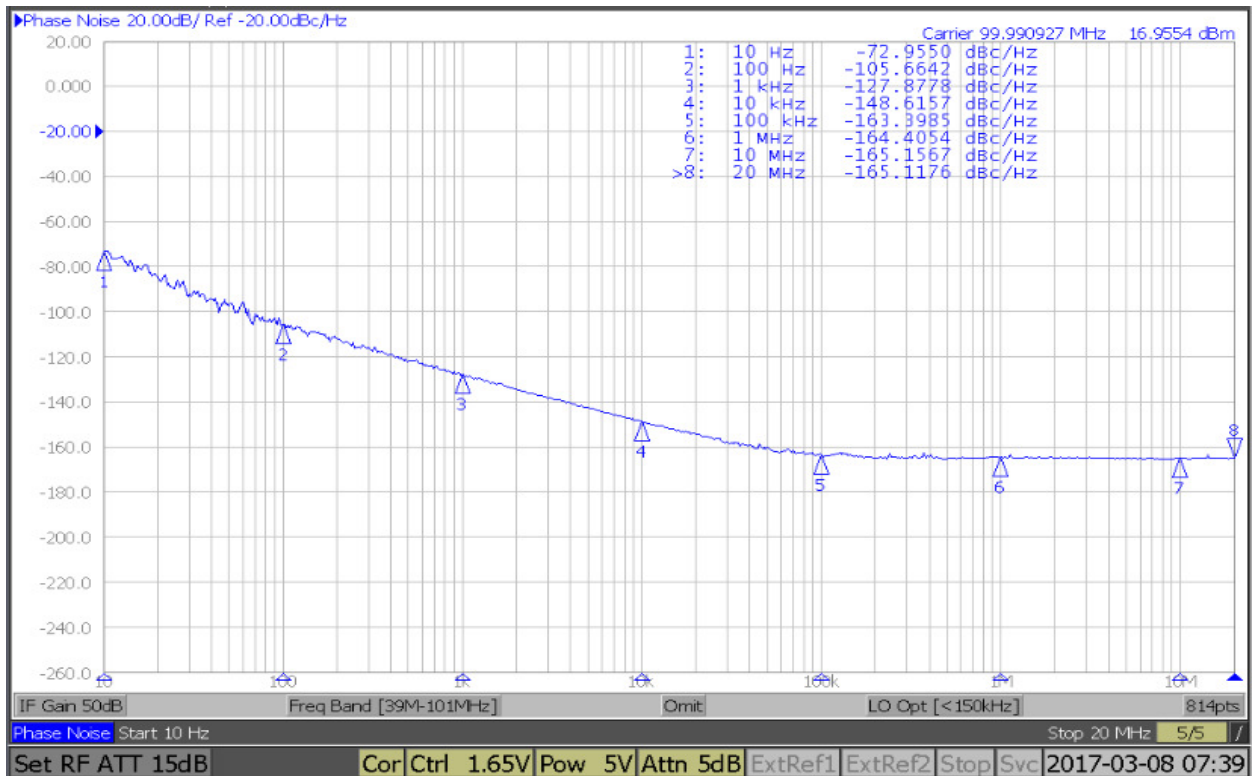


**Table 3e** – Typical Phase Noise at 80MHz, 3.3V


SIZE	CODE IDENT NO.	THIRD ANGLE PROJECTION	UNSPECIFIED TOLERANCES	DWG NO.	REV.	SHEET
A	00136		N/A	DOC206218	B	12



**Table 3f** – Typical Phase Noise at 100MHz, 3.3V



**Table 3g** – Typical Phase Noise at 100MHz, 5.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>13</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

OPN. NO.	OPERATION LISTING	REQUIREMENTS AND CONDITIONS	Option A	Option B	Option C	Option D	Option E	Option F	Option G	Option X
	<b>SCREENING</b>	MIL Class Similarity	K	B-	S-	K+	B	S		EM
			100%	100%	100%	100%	100%	100%	100%	100%
1	Non-Destruct Bond Pull	MIL-STD-883, Meth 2023	X	NR	X	X	NR	X	NR	NR
2	Internal Visual	MIL-STD-883, Meth 2017 Class K, Meth 2032 Class K	X	X	X	X	X	X	X	X
3	Stabilization (Vacuum) Bake	MIL-STD-883, Meth 1008, Cond C, 150°C	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 48 hrs.	X 24 hrs.	X 48 hrs.	X 24 hrs.	X 24 hrs.
4	Thermal Shock	MIL-STD-883, Meth 1011, Cond A	NR	NR	X	NR	NR	X	NR	NR
5	Temperature Cycle	MIL-STD-883, Meth 1010, Cond. B, 10 cycles min.	X	X	X	X	X	X	X	NR
6	Constant Acceleration	MIL-STD-883, Meth 2001, Cond A, Y1 plane only, 5000 g's	X	X	X	X	X	X	X	NR
7	Particle Impact Noise Detection	MIL-STD-883, Meth 2020, Cond B	X	X	X	X	X	X	NR	X
8	Electrical Testing, Pre Burn-In	Perform tests in Table 2. Nominal Vcc, nominal temperature	X	X	X	X	X	X	X	X
9	1 <sup>st</sup> Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	X 160 hrs.	X 240 hrs.	X 160 hrs.	NR
10	Electrical Testing, Intermediate	Perform tests in Table 2. Nominal Vcc, nominal temperature	X	NR	NR	X	NR	NR	NR	NR
11	2 <sup>nd</sup> Burn-In	MIL-STD-883, Meth 1015, Condition B	X 160 hrs.	NR	NR	X 160 hrs.	NR	NR	NR	NR
12	Freq-Temp Slew Test	Operating temp. range, frequency plotted at 1.0°C steps	AR	AR	AR	AR	AR	AR	NR	NR
13	Electrical Testing, Post Burn-In (Group A)	Perform tests in Table 2. Nominal Vcc & extremes, nominal temperature & extremes	X	X	X	X	X	X	X nom. Vcc	NR
14	Seal: Fine Leak	MIL-STD-202, Meth 112, Cond C 5 x 10 <sup>-8</sup> atm cc/sec max	X	X	X	X	X	X	X	X
15	Seal: Gross Leak	MIL-STD-202, Meth 112, Cond D	X	X	X	X	X	X	X	X
16	Radiographic Inspection	MIL-STD-883, Meth 2012	X	AR	AR	X	AR	X	NR	NR
17	Solderability	MIL-STD-883, Meth 2003	1/	1/	1/	1/	1/	1/	1/	NR
18	External Visual & Mechanical	MIL-STD-883, Meth 2009	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/	X 2/
19	Aging, 30 Day 3/ (M55310 Group B)	MIL-PRF-55310, para. 4.8.35.1	NR	NR	NR	X	13 pcs.	X	NR	NR

LEGEND: X = Required, NR = Not Required, AR = As Required

**TABLE 4 - Test Matrix**

1/ Performed at package LAT. Include LAT data sheet

2/ When specified, RGA samples will be removed from the lot after completion of this operation. Use of Screening failures require customer concurrence.

3/ By customer request, the Aging test may be terminated after 15 days if the measured aging rate is less than one-half the specified aging rate, as described in paragraph 4.3.4.1 herein. See the customer PO.

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>14</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

Subgroup	Class K	Test	Mil-STD-750		Quantity (accept number)	Mil-PRF-38534 Reference Paragraph
			Method	Condition		
1	X	Element Electrical A. May perform at wafer level B. All failures shall be removed from the lot		Perform at room ambient	100%	C.3.3.1
2	X	Element Visual	2069, 2070, 2072, 2073		100%	C.3.3.2
3	X	Internal Visual	2069, 2070, 2072, 2073, 2074		10(0) or 22(0) (Notes 1 & 2)	C.3.3.3 C.3.3.4.2
4	X	Temperature Cycling	1051	C	10(0) 22(0) (See Notes 1 & 2)	C.3.3.3
	X	Surge Current (when applicable)	4066	A or B as specified		
	X	Constant Acceleration	2006  2001	Y1 direction 20,000 G / 10,000 G for Pd ≥ 10W		
	X	Interim Electrical				C.3.3.4.3
	X	High Temperature Reverse Bias (HTRB)	1039 1042 1038	A B A		
	X	Interim Electrical & Delta		Complete Within 16 hrs of HTRB completion		
	X	Burn-In 240 hours	1039, 1042 1038 1040	B A B		
	X	Post Burn-In Electrical				C.3.3.4.3
	X	Steady State Life 1000 hours	1026 1037 1042 1048			
	X	Final Electrical			C.3.3.4.3	
5	X	Wire Bond Evaluation	2011		10(0) wires or 20(1) wires	C.3.3.3 C.3.3.5
6	X	SEM	2018 2077		See method 2018 or 2077 & Note 2	C.3.3.6

NOTES:

- Subgroups 3, 4, & 5 shall be performed on a sample of 10 die if the wafer lot is from a QPL/QML line. If the die are from commercial wafer lots, then the sample size shall be 22 die. Die from QPL/QML wafers not meeting the QPL/QML requirements and downgraded to commercial grade shall not be used.
- Subgroups 3, 4 & 5 shall be performed in the order listed in Table 5. Subgroup 6 may be performed at any time.

**TABLE 5 - SEMICONDUCTOR ENHANCED ELEMENT EVALUATION**


SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>15</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

Subgroup	Class	Test	Mil-STD-883		Quantity (accept number)	Mil-PRF-38534 Reference Paragraph
	K		Method	Condition		
1	X	Element Electrical A. May perform at wafer level B. All failures shall be removed from the lot C. Perform at room ambient			100%	C.3.3.1
2	X	Element Visual	2010		100%	C.3.3.2
3	X	Internal Visual	2010		10(0) or 22(0)	C.3.3.3 C.3.3.4.2
4	X	Temperature Cycling	1010	C	10(0) 22(0)	C.3.3.3
	X	Mechanical Shock or Constant Acceleration	2002 2001	B, Y1 direction 3,000 G, Y1 direction		
	X	Interim Electrical				C.3.3.4.3
	X	Burn-In	1015	240 hours minimum at +125°C		
	X	Post Burn-In Electrical				C.3.3.4.3
	X	Steady State Life	1005			
	X	Final Electrical				C.3.3.4.3
5	X	Wire Bond Evaluation	2011		10(0) wires or 20(1) wires	C.3.3.3 C.3.3.5
6	X	SEM	2018		See method 2018	C.3.3.6

Notes:

Subgroups 3, 4, & 5 shall be performed on a sample of 10 die if the wafer lot is from a QPL/QML line. If the die are from commercial wafer lots, then the sample size shall be 22 die.

**TABLE 6 - MICROCIRCUIT ENHANCED ELEMENT EVALUATION**

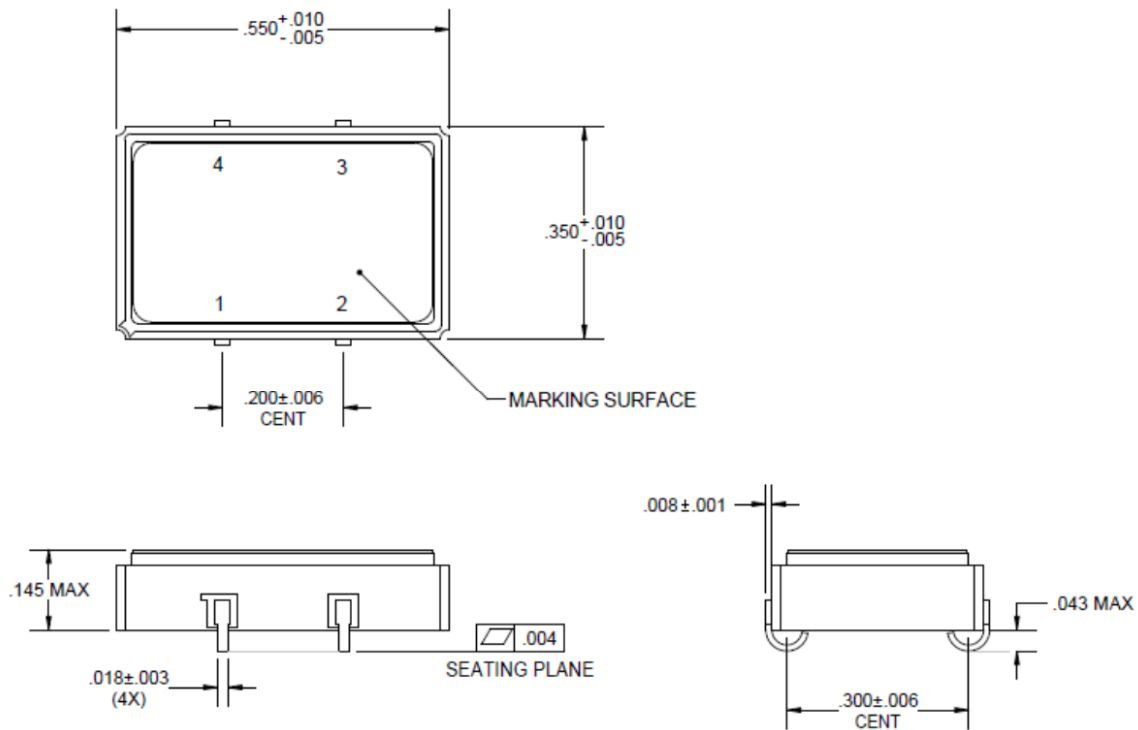
SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>16</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------



Parts Type	Test	Requirement Paragraph	Sample size	Allowable Reject(s)
Ceramic Capacitors				
M55681 FRL S or M123 (chips)	N/A	N/A	N/A	N/A
DSCC Dwg, COTS	Ultrasonic scan or CSAM, Except single-layer ceramic capacitors (SLCC's)	M123	100%	N/A
	Group A	M123	M123	M123
	Group B, Subgroups 1 & 2 if part is used in <10V applications or Subgroups 1 & 3 if part is used in >10V applications	M123	M123	M123
Resistors				
M55342 FRL R or S	N/A	N/A	N/A	N/A
Inductors (See Paragraph 4.1.2)				
Custom closed magnetics	Group A	Mil-Std-981	Mil-Std-981	Mil-Std-981
	Group B	Mil-Std-981	Mil-Std-981	Mil-Std-981
<p>Magnetics, Closed Construction Leaded and Surface Mount (transformers, inductors, coils) (Note: Stacking magnetics shall be qualified and the effects of the long term performance of the hybrids verified. When stacking magnetics, a repeat of the thermal cycling plus electrical measurements as specified in Group A of Mil-Std-981. Design, workmanship and materials/processes shall conform to MIL-STD-981 requirements).</p> <p>Magnetics, Open Construction are unencapsulated and unpotted self-leaded parts consisting of magnet wire wound around a magnetic core. These parts are fully visually inspectable. Open construction magnetics shall be subjected to 100% electrical measurements and visual inspection per Mil-Std-981.</p>				


**TABLE 7: PASSIVE COMPONENT ENHANCED ELEMENT EVALUATION**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>17</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

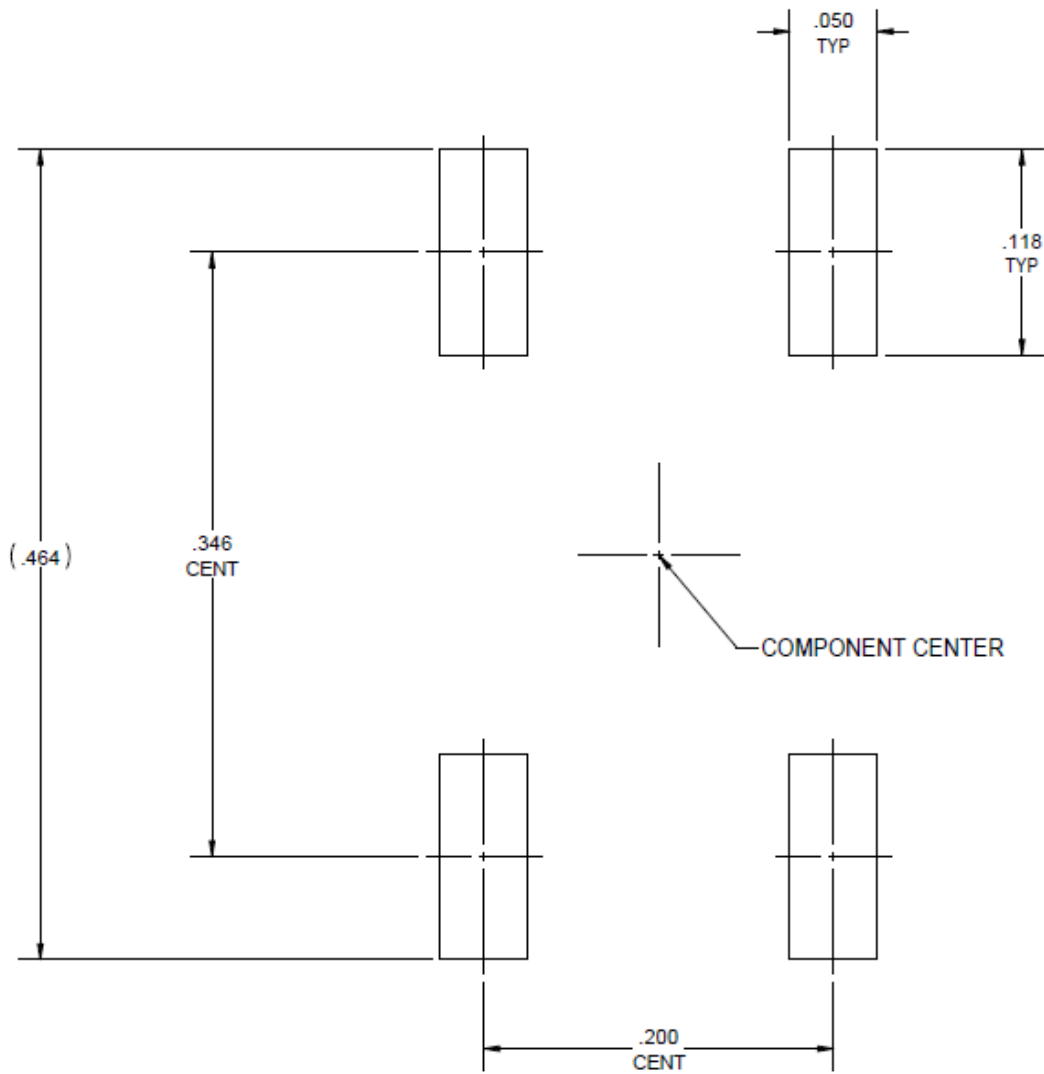


Pin Connections	
1	Control Voltage
2	GND/Case
3	Output
4	Vcc


**FIGURE 1**  
Model 5116 Package Outline

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>18</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------

**APPENDIX A**  
Recommended Land Pattern



**Model 5116**

SIZE <b>A</b>	CODE IDENT NO. <b>00136</b>	THIRD ANGLE PROJECTION 	UNSPECIFIED TOLERANCES <b>N/A</b>	DWG NO. <b>DOC206218</b>	REV. <b>B</b>	SHEET <b>19</b>
------------------	--------------------------------	---	--------------------------------------	-----------------------------	------------------	--------------------