



Crystal Can Welded • DPDT Dry Circuit to 5 and 10 Amps

- **AVAILABLE WITH ARC SHIELDS**...for grounded case operation on 115 VAC loads, to 10 Amps.

SPECIFICATIONS

GENERAL

Contact Arrangement2PDT (2 Form C)

Weight.....1.4 oz approx.

Designed to meet the requirements of MIL-PRF-39016.

PERFORMANCE

Contact Rating (Note 1)

Resistive:

BR19X10 Amps @ 28 VDC or 115V 400 Hz
(Case Ungrounded)

BR19Y5 Amps @ 28 VDC or 115V 400 Hz
(Case Ungrounded)

Inductive:

BR19X3.5 Amps @ 28 VDC

BR19Y1.75 Amps @ 28 VDC

Life100,000 operations minimum
@ rated load, 125°C

Pull In Power:

BR19X500 mw approx.

BR19Y175 mw approx.

Operate/Release Time: DC Coil AC Coil

BR19X7.0 ms max 20 ms max

BR19Y8.5 ms max 20 ms max

Excluding bounce time at nominal coil voltage

Contact Bounce Time2 ms max
@ rated contact load, 28 VDC

Contact Voltage Drop:

Before Life100 mv max. @ rated current
6 or 28 VDC

After Life200 mv max. @ rated current
6 or 28 VDC

ENVIRONMENTAL

Temperature Range-65°C to +125°C

Vibration (Note 2).....0.4" DA 10 - 38 Hz,
20 G's 38 - 2,000 Hz

Shock (Operating) (Note 2)50 G's 11 ms

ELECTRICAL CHARACTERISTICS

Duty Cycle.....Continuous

Insulation Resistance

10,000 megohms @ 500V 25°C

1,000 megohms @ 500V 125°C

Dielectric Strength:

Sea Level:

Contact to Case1,250 VRMS

Contact to Coil1,250 VRMS

Coil to Case1,000 VRMS

Across Open Contacts

BR19X1,250 VRMS

BR19Y1,000 VRMS

70,000 Feet


All points.....500 VRMS

Notes


1. For case grounded loads and other ratings, consult the factory.
2. For applications requiring other shock and vibration levels, consult the factory.
3. For other ratings consult the factory.
4. Relay contacts which have switched high level currents are no longer suitable for switching low level loads.

COIL DATA


PART NUMBER MODEL BR19Y — 5 Amps (175 MW) MODEL BR19X — 10 Amps (500 MW)		BR19Y-50()()-6V BR19X-16()()-6V	BR19Y-190()()-12V BR19X-65()()-12V	BR19Y-900()()-26V BR19X-300()()-26V	BR19Y-2.8K()()-48V BR19X-950()()-48V	BR19Y-15K()()-115V BR19X-5.5K()()-115V	BR19Y-AC()()-115V BR19X-AC()()-115V
NOMINAL COIL VOLTAGE		6 VDC	12 VDC	26 VDC	48 VDC	115 VDC	115 VAC
MAXIMUM COIL VOLTAGE		7.3 VDC	14.8 VDC	32 VDC	59 VDC	127 VDC	127 VAC
PULL IN VOLTAGE (MAX @ +125°C)		4.4 VDC	8.4 VDC	18 VDC	33 VDC	79 VDC	79 VAC
PULL IN VOLTAGE (MAX)		3 VDC	6 VDC	13 VDC	24 VDC	57.5 VDC	57.5 VAC
DROP OUT VOLTAGE (MIN)		0.3 VDC	0.6 VDC	1.3 VDC	2.4 VDC	5.7 VDC	5.7 VAC
COIL RESISTANCE ± 10% @ 25°C	BR19Y	50 OHMS	190 OHMS	900 OHMS	2.8K OHMS	15K OHMS	AC
	BR19X	16 OHMS	65 OHMS	300 OHMS	950 OHMS	5.5K OHMS	AC

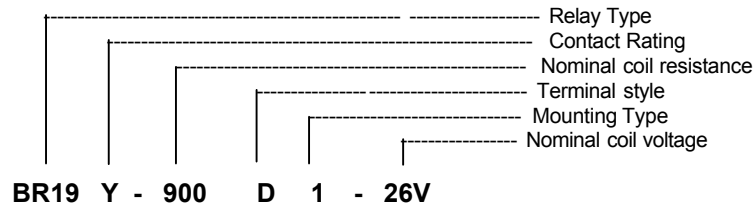


SCHEMATIC TERMINALVIEW

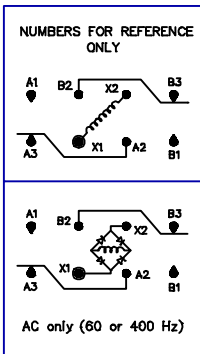

TERMINAL STYLES

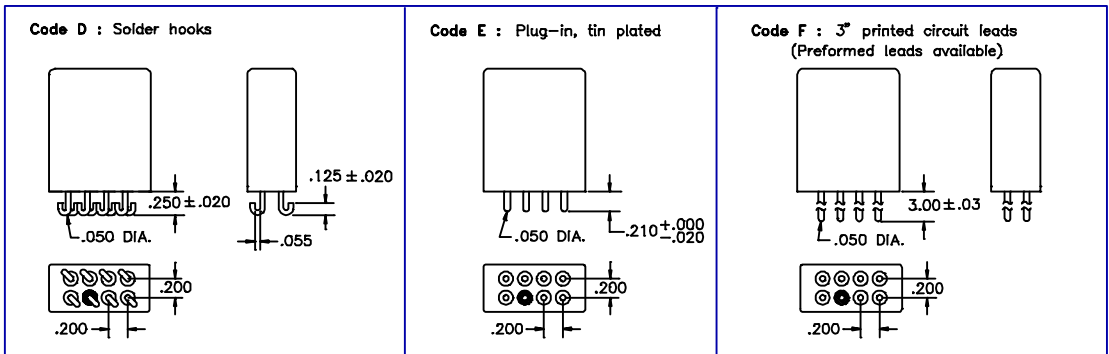

MOUNTING CODES

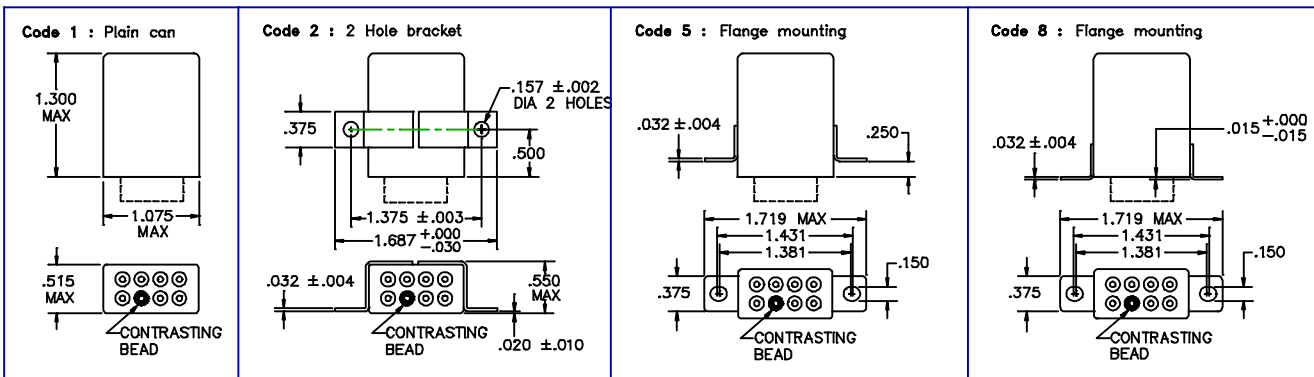

GENERAL NOTES

- Unless otherwise specified, all tests made at nominal coil voltages, @ 25°C.
- For special coil variations, switching configurations, terminals styles and mounting types, consult the factory.
- Unless otherwise specified, tolerances on decimal dimensions are ± .010".
- Specifications contained herein are subject to change without notice.



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996

E-mail: sales.support@microsemi.com

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.