



Crystal Can Welded • DPDT Dry Circuit to 10 Amps DC Suppressed Coils

SPECIFICATIONS

GENERAL

Contact Arrangement2PDT (2 Form C)
Weight1.0 oz approx.
 Designed to meet the requirements of MIL-PRF-39016.

PERFORMANCE

Contact Rating (Note 1):

Resistive10 Amps @ 28 VDC or 115V 400 Hz
 (Case Ungrounded)
 Inductive3.5 Amps @ 28 VDC

Life100,000 operations minimum
 @ rated load, 125°C

Pull In Power400 mw approx.

Operate/Release Time7 ms max, excluding
 bounce time at nominal coil voltage

Contact Bounce Time2 ms max
 @ 10 amps 28 VDC

Contact Voltage Drop:

Before Life100 mv max @ rated current
 6 or 28 VDC
 After Life200 mv max @ rated current
 6 or 28 VDC

ENVIRONMENTAL

Temperature Range-65°C to +125°C

Vibration (Note 2)0.4" DA 10 - 31 Hz
 20 G's 31 - 2,000 Hz

Shock (Operating)(Note 2) 50 G's 11 ms

ELECTRICAL CHARACTERISTICS

Duty CycleContinuous

Insulation Resistance
 10,000 megohms @ 500V 25°C
 1,000 megohms @ 500V 125°C

Dielectric Strength:

Sea Level:

Contact to Case1,250 VRMS
 Contact to Coil1,250 VRMS
 Coil to Case1,000 VRMS
 Across Open Contacts1,250 VRMS

70,000 Feet:


All Points500 VRMS

Notes

- For case grounded loads and other ratings, consult the factory.
- For applications requiring other shock and vibration levels, consult the factory.
- For other ratings consult the factory.
- Relay contacts which have switched high level currents are no longer suitable for switching low level loads.


COIL DATA

MODEL BR24D PART NUMBER	BR24D-85() -12V	BR24D-300() -26V	BR24D-400() -26V
NOMINAL COIL VOLTAGE	12 VDC	26 VDC	26 VDC
MAXIMUM COIL VOLTAGE	14.8 VDC	32 VDC	32 VDC
PULL IN VOLTAGE (MAX @ +125°C)	8.3 VDC	18 VDC	18 VDC
PULL IN VOLTAGE (MAX)	6.4 VDC	14 VDC	14 VDC
DROP OUT VOLTAGE (MIN)	0.6 VDC	1.3 VDC	1.3 VDC
COIL RESISTANCE $\pm 10\%$ @ 25°C	85 OHMS	300 OHMS	400 OHMS

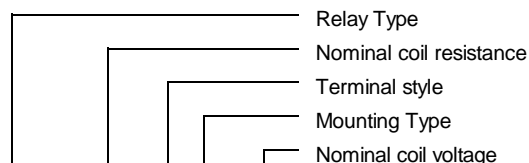


BR24D - 400 A 1 - 26V

SCHEMATIC TERMINAL VIEWS

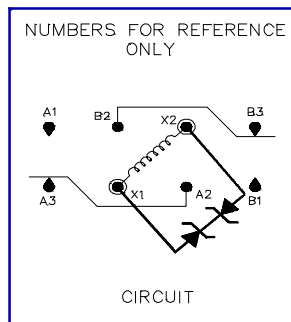


TERMINAL STYLES

Code A : Plug-in, tin plated

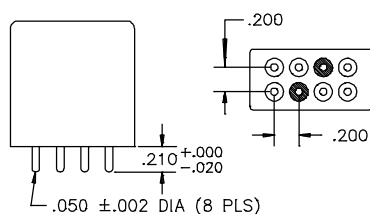


Code B : Solder hooks

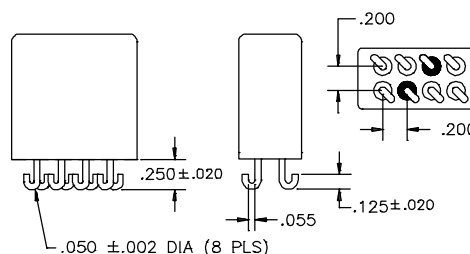


MOUNTING CODES

Code 1 : Plain can

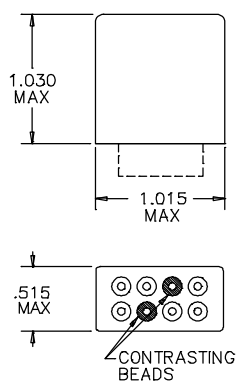


Code 2 : 2 Hole bracket

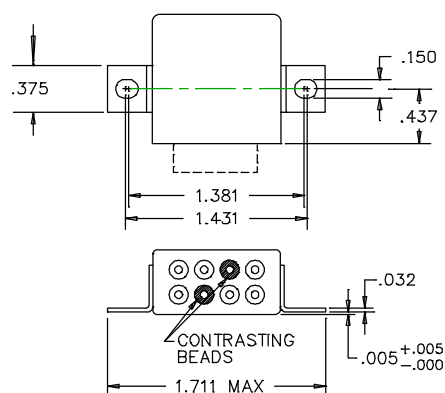

Code 6 : A=.156 flange mounting

Code 5 : A=.250 flange mounting

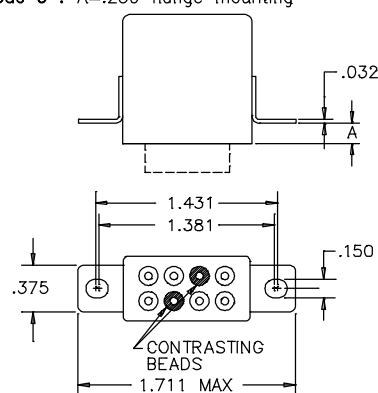

GENERAL NOTES

- Unless otherwise specified, all tests made at nominal coil voltages, @ 25°C.
- For special coil variations, switching configurations, terminals styles and mounting types, consult the factory.
- Unless otherwise specified, tolerances on decimal dimensions are $\pm .010$ ".
- Specifications contained herein are subject to change without notice.



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996

E-mail: sales.support@microsemi.com

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.