


PDS-102GO PoE Switch

2+1 outdoor switch, 30W per port , managed PoE, AC input

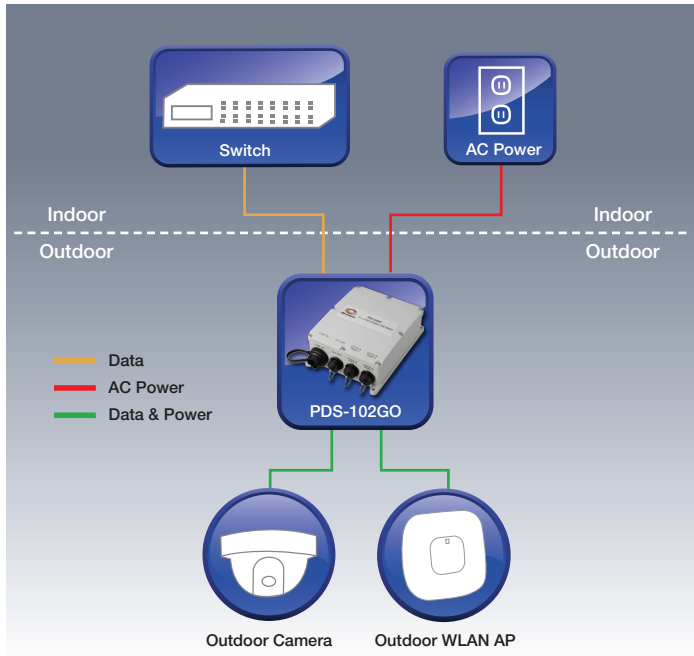

Overview

The PDS-102GO is an outdoor PoE switch. It enables the connection of 2 powered devices to the network such as an outdoor WLAN, outdoor IP Camera and outdoor P2P radio.

The switch is IP66 rated and can be installed in outdoor environments. There is no need to open the unit during installation. Deployment is simple and straight forward.

The PDS-102GO will deliver PoE power up to 30W per device. In addition, it enables remote monitoring and control of the devices' status, including remote reset.

The 102GO extends the reach between the switch and powered devices by an additional 100m, to a maximum of 200 meters, a major benefit in many applications.

The PDS-102GO offers lightning protection to the switch itself and to the indoor network.

PDS-102GO Features

- 3 ports – 1 data input, 2 PoE outputs
- Remotely managed – SNMP and web
- Extends network reach by additional 100m
- Outdoor rated: IP66
- Extended temperature range -40C , +65C for 802.3af
- IEEE802.3at compliant, 30W per port
- Supports 10/100/1000Mbps data rates
- Includes integral surge protection
- Plug 'n Play installation (installer does not have to open unit)

PDS-102GO Specifications

| | |
|-------------------------------------|--|
| No. of Ports | 3 |
| Pass Through Data Rates | 10/100/1000 Mbps (half/full duplex) |
| Power over Ethernet Output | Pin Assignment and Polarity: 1/2 (-) and 3/6 (+) Output Power Voltage: 54VDC User Port Power: 30W per port, 60W total |
| Input Power Requirements | Input Voltage: 100 to 240 VAC Input Current: 2.0A |
| Dimensions | 214 mm x 150 mm x 70 mm 8.42 in. x 5.90 in. x 2.75 in |
| Weight | 2.09 lbs (950g) |
| Indicators | No LED indicators |
| Connectors | Shielded rugged RJ-45 (with gasket) |
| Environmental Conditions | Operating Ambient Temperature: -40° to 122°F (-40 to 50°C) for 60W -40° to 149°F (-40 to 65°C) for 30W Operating Humidity: Maximum 95%, Non-condensing Storage Temperature: -40° to 185°F (-40° to 85°C) Storage Humidity: 10% to 95%, Non-condensing Operating Altitude: Up to 6,560 ft. (2000 m) Weather Rating: IP66, NEMA 4X |
| Reliability | MTBF: 200,000 hrs. @25°C |
| Thermal Rating | 41 BTU/Hr (@240VAC) |
| Warranty | 1-year |
| Regulatory Compliance | IEEE 802.3at (PoE), RoHS Compliant, WEEE Compliant, CE |
| Electromagnetic Emission & Immunity | FCC Part 15, Class B EN 55022 Class B EN 55024, EN61000-4-5 Class 5 (6kV CM) VCCI |
| Surge Protection | Meets Surge Protection as specified in GR-1089-CORE Issue 4 ITU-T K.20 6 kV on AC lines |
| Safety Approvals | UL60950-1 & UL60950-22 GS Mark |
| Other Standards and Approvals | Dust and water intrusion: IEC60529, Level IP66; NEMA 250 |

Ordering Information


| Part Number | Name | Description |
|----------------|---------------------------------|---------------------------------------|
| PDS-102GO/AC/M | Microsemi 2+1 Outdoor Switch | 3-port PoE Outdoor Switch |
| PD-OUT/MBK/G | Microsemi OUT/MBK/G | Mounting brackets for outdoor unit |

PDS-102GO PoE Outdoor Switch

Management Capabilities

| | |
|---|--|
| System Network Management Capabilities | Web Interface – used to view unit PoE & Network status, unit configuration and view unit production information. |
| | SNMP v2/v3 – Monitor unit over the network (MIB-II RFC1213), monitor / configure unit PoE capabilities (RFC3621). |
| | Telnet – used to view unit PoE & Network status, unit configuration and production information. Software update, Enable/Disable PoE functionality, ping remote Network device for connectivity test. |
| | SNMP Traps – used to report various PoE events as PoE PD insertion/removal. |
| | SysLog – used to report PoE events, Invalid remote user access, initial DHCPv4/v6 address, etc. |
| Ethernet Switch Network Capabilities | 10M/100M/1000Mbit Half Duplex / Full Duplex Ethernet speed. |
| | 8K internal MAC address lookup engine. |
| | Auto MDIX |
| PoE Capabilities | Jumbo frames |
| | IEEE 802.3at – delivers up to 30 Watts per port – View and statuses. |
| | PoE Enable/Disable – Enable/ Disable PoE ports Power output (Ethernet data is always enabled). |
| | Weekly Schedule – Automatic activation/deactivation of PoE ports based on time of day. |
| Configuration Options | Remote device reset – Turning temporary device power off and back on resets attached PD device. |
| | Web based: Via a WEB browser |
| | SNMPv1/2c/3: Via an SNMP management application on a remote computer |
| Security and User Authentication | Telnet: Via a Telnet application on a remote computer |
| | Web, Telnet, SNMPv2, SNMPv3 |

PDS-102GO outdoor switch with outdoor mounting bracket

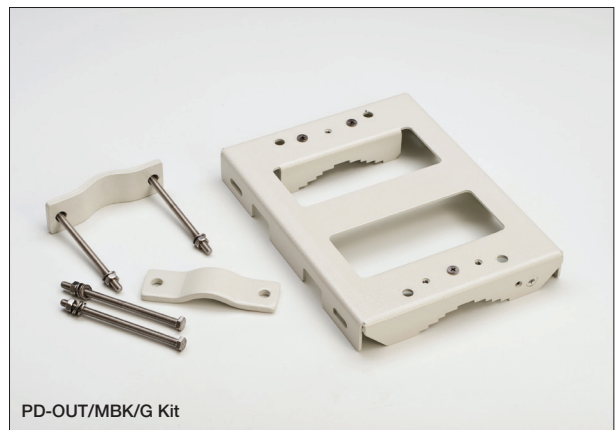

Microsemi

Microsemi Corporate Headquarters
 One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Sales: +1 (949) 380-6136
 Fax: +1 (949) 215-4996
 email: sales.support@microsemi.com
 www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

©2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.