101330C

RD500-200-10W-500 MHz Dispersive Delay Line 200 MHz Bandwidth

Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Center Frequency	F_0		500		MHz
Bandwidth	B		200		MHz
Dispersion	T		10		µsec
Delay	T_0	7.04	7.087	7.12	µsec
Insertion Loss	IL		39.4	42	dB
Slope	S_0	–0.0497	–0.0496	–0.0494	µs/MHz
Pulse Width at –3 dB			0.0061	0.0063	µsec
Sidelobes for $\|t - T_0\| < T$			–30.9	–25	dB
Time Spurious for $\|t - T_0\| > T$			–61	–56	dB
Substrate Material	YZ-LN				

Notes

1. Center Frequency (F_0) and Bandwidth (B) are defined, not measured. Dispersion (T) is defined as $|B * S_0|$.
2. Insertion Loss is the minimum loss for $|f - F_0| < .5B$
3. Delay and Slope determined by best fit quadratic pulse in $|f - F_0| < .5B$.
4. Specifications are at 22 °C only. Unit will operate undamaged from –54 °C to 125 °C with shifts $dF_0 = -x * F_0$, $dT_0 = x * (T_0 + S_0 * F_0)$, $dS_0 = x * 2 * S_0$, where x = 94E-6 * (temperature – 22 °C)

Typical Performance

Frequency Response

(Best Fit Quadratic Phase Removed)

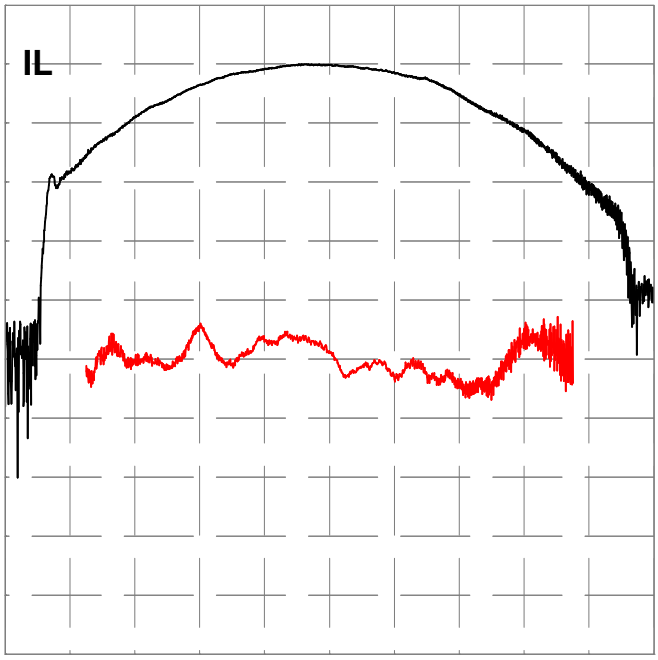

10 dB/div, 10 deg/div, 24.000 MHz/div

Compressed Pulse Response

FFT(Frequency Response*Cos(0.5*PI*MIN(1,MAX(0,|f-F0|*10.0/B-5.0)))^2)

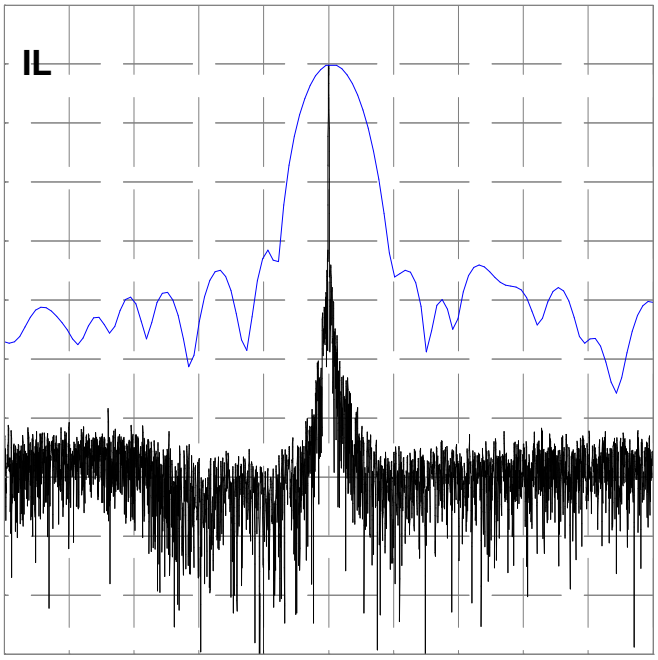

10 dB/div, 0.667 us/div, 0.010 us/div

101330C

RD500-200-10W-500 MHz Dispersive Delay Line 200 MHz Bandwidth

Package Outline

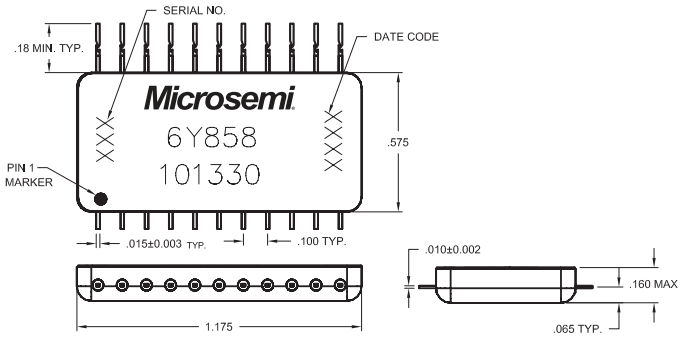

Matching

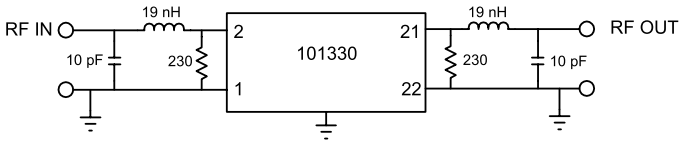

Microsemi
Power Matters.™

Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Fax: +1 (949) 215-4996
Email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

MSCC-0347-DS-01032-2.00-0717