

1214GN-700V

Datasheet

Class-AB GaN-on-SiC HEMT Transistor



**Microsemi Corporate Headquarters**

One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

©2017 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

About Microsemi

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

1.1 Revision 1.0

Revision 1.0 was published in March 2017. It was the first publication of this document.

Contents

- Revision History..... 3
 - 1.1 Revision 1.0..... 3
- 2 Product Overview 7
- 3 Electrical Specifications..... 8
 - 3.1 Absolute Maximum Ratings 8
 - 3.2 Electrical Characteristics 8
 - 3.3 Functional Characteristics 8
 - 3.4 Typical Broadband Performance Data 9
- 4 Package Information 10
 - 4.1 55-Q03 Package 10

Figures

Figure 1 1214GN-700V Case Outline 7

Figure 2 Typical Broadband Performance Data Graphs..... 9

Figure 3 55-Q03 Package Outline 10

Tables


Table 1 Absolute Maximum Ratings	8
Table 2 Electrical Characteristics	8
Table 3 Functional Characteristics	8
Table 4 Typical Broadband Performance Data	9
Table 5 55-Q03 Package Dimensions	10

2 Product Overview

The 1214GN-700V is an internally matched, common-source, class-AB GaN-on-SiC HEMT transistor capable of providing over 18 dB gain, 700 W of pulsed RF output power at 300 μ s pulse width, and 10% duty factor across the 960 MHz to 1215 MHz band. The transistor has internal pre-match for optimal performance. This hermetically sealed transistor is designed for the output stage of L-Band pulsed primary radar systems. It utilizes gold metallization and eutectic die attach to provide the highest reliability and superior ruggedness.

The export classification is EAR-99.

Figure 1 1214GN-700V Case Outline

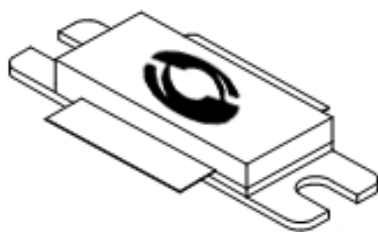

3 Electrical Specifications

This section details the electrical specifications of the of the 1214GN-700V device.

3.1 Absolute Maximum Ratings

The following table shows the absolute maximum ratings of the 1214GN-700V device.

Table 1 Absolute Maximum Ratings

Rating	Parameter	Value	Units
Maximum power dissipation	Device dissipation at 25 °C		W
Maximum voltage and current	Drain-source voltage (V_{DSS})	150	V
	Gate-source voltage (V_{GS})	-8 to 0	V
Maximum temperatures	Storage temperature (T_{STG})	-55 to 125	°C
	Operating junction temperature	200	°C

3.2 Electrical Characteristics

The following table shows the typical electrical characteristics of the 1214GN-700V device at 25 °C.

Table 2 Electrical Characteristics

Symbol	Characteristics	Test Conditions	Min	Typ	Max	Units
P_{OUT}	Output power	Freq = 960 MHz, 1090 MHz, 1215 MHz	700	750		W
G_P	Power gain	$P_{IN} = 12$ W, Freq = 960 MHz, 1090 MHz, 1215 MHz	16	16.5		dB
η_D	Drain efficiency	$P_{IN} = 12$ W, Freq = 960 MHz, 1090 MHz, 1215 MHz	60	63		%
D_r	Droop	$P_{IN} = 12$ W, Freq = 960 MHz, 1090 MHz, 1215 MHz		0.5		dB
VSWR-T	Load mismatch tolerance	$P_{IN} = 12$ W, Freq = 1215 MHz			3:1	
θ_{JC}	Thermal resistance	Pulse width = 300 μ s; Duty = 10%			0.22	°C/W

Bias Condition: $V_{DD} = 50$ V, $I_{DQ} = 100$ mA constant current ($V_{GS} = -2.0$ V to -4.5 V) with constant gate bias

3.3 Functional Characteristics

The following table shows the typical functional characteristics of the 1214GN-700V device at 25 °C.

Table 3 Functional Characteristics

Symbol	Characteristics	Test Conditions	Min	Typ	Max	Units
$I_{D(Off)}$	Drain leakage current	$V_{GS} = -8$ V, $V_D = 150$ V			64	mA
$I_{G(Off)}$	Gate leakage current	$V_{GS} = -8$ V, $V_D = 0$ V			22	mA

3.4 Typical Broadband Performance Data


The following table shows the typical broadband performance data of the 1214GN-700V device, where the pulse width is 300 μ s and the duty factor is 10%. In the following table, $V_{DD} = 50$ V, $V_{GS} = 3.62$ V, and $I_{DQ} = 120$ mA.

Table 4 Typical Broadband Performance Data

Freq (GHz)	P_{IN} (W)	P_{OUT} (W)	G_P (dB)	I_D (mA)	Droop (dB)	η_D (%)
1.2	12.0	799.8	18.25	2.67	0.5	71
1.3	12.0	809.1	18.30	2.62	0.45	63
1.4	12.0	755.1	18	2.57	0.4	62

The following graphs show the typical broadband performance of the 1214GN-700V device.

Figure 2 Typical Broadband Performance Data Graphs

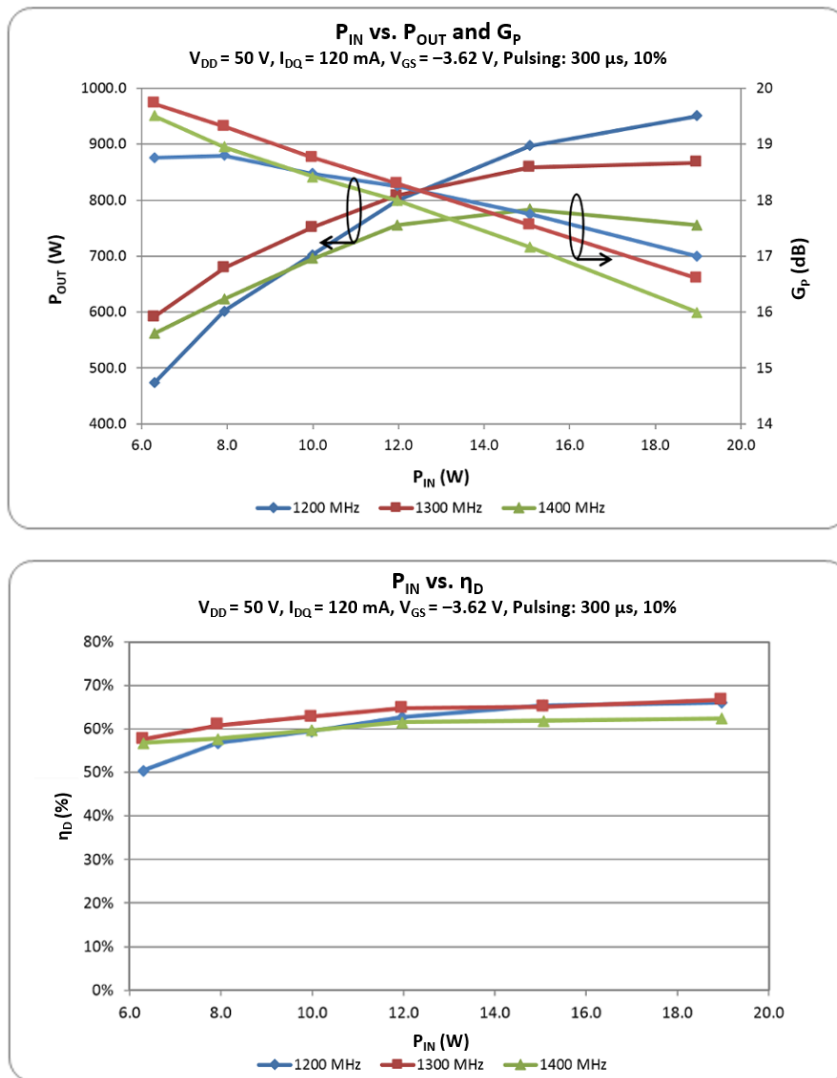


4 Package Information

This section details the package information of the 1214GN-700V device.

4.1 55-Q03 Package

The following illustration shows the 55-Q03 package outline of the 1214GN-700V device. PIN 1 is the drain, PIN 2 is the source, and PIN 3 is the gate.

Figure 3 55-Q03 Package Outline

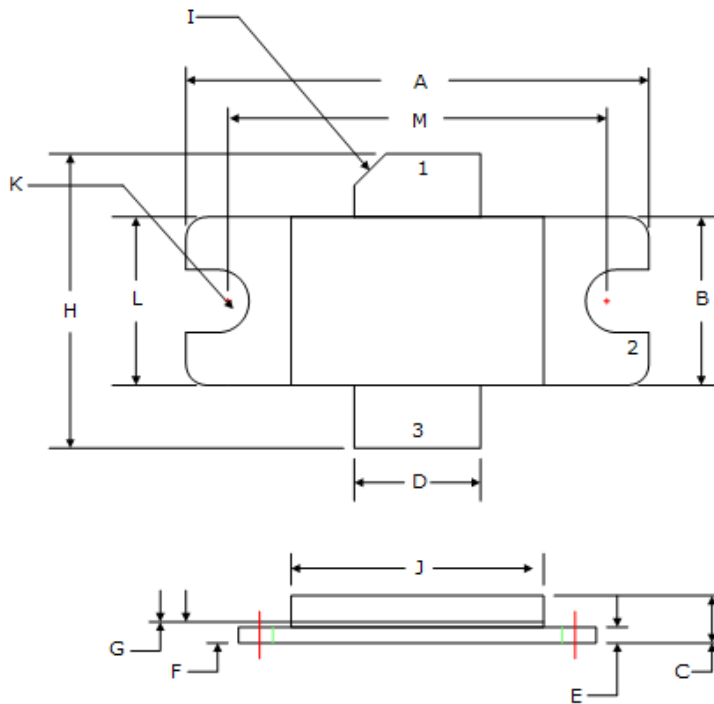

The following table shows the 55-Q03 dimensions of the 1214GN-700V device.

Table 5 55-Q03 Package Dimensions

Dimension	Millimeters	Tol (mm)	Inches	Tol (in.)
A	34.03	0.25	1.340	0.010
B	9.78	0.25	0.385	0.010
C	3.55	0.19	0.140	0.007
D	12.70	0.13	0.500	0.005
E	1.02	0.13	0.040	0.005
F	1.65	0.13	0.065	0.005
G	0.13	0.03	0.005	0.001
H	19.43	0.76	0.765	0.030
I	45°	5°	45°	5°

Dimension	Millimeters	Tol (mm)	Inches	Tol (in.)
J	19.81	0.25	0.780	0.030
K	3.30 DIA	0.13	0.130 DIA	0.005
L	9.40	0.13	0.370	0.005
M	27.94	MAX	1.100	MAX