

Rad Hard 1.5 Amp Three Terminal Adjustable Voltage Regulator

Description

The RAD HARD SGR117A 3-terminal positive adjustable regulators have been designed to meet the most stringent space and strategic level radiation requirements while meeting the industry standard LM117A and LM117 electrical specifications.

In addition to the features of the standard SGR117A, these devices are capable of meeting the attached data sheet electricals after the following radiation events:

TOTAL DOSE......300 k RAD
NEUTRON FLUENCE......5x10¹² N/cm²

Features

- Full Electrical Performance After Radiation
 Exposure 300 k Rad Total Dose 5x10¹² N/cm²
- 1% Output Voltage Tolerance
- 0.01%/V Line Regulation
- 0.3% Load Regulation
- Min. 1.5 A Output Current
- Available in TO-257 Package (Hermetic TO-220)

High Reliability Features

- Available to MIL-STD-883, ¶ 1.2.1
- Radiation Data Available
- MSC-AMS level "S" Processing Available

Block Diagram

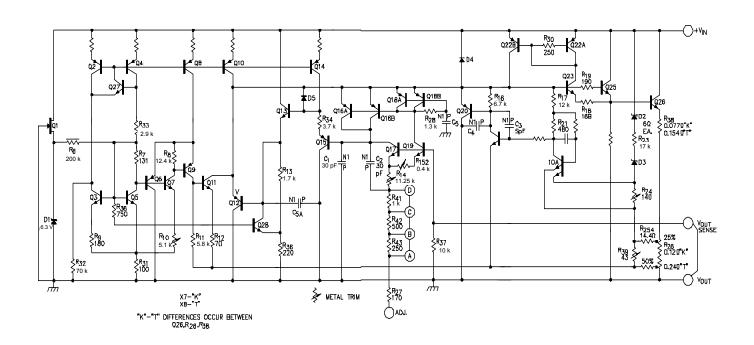


Figure 1 - Block Diagram



Absolute Maximum Ratings (Note 1)

Operating Junction Temperature

Hermetic (K, T, IG-Packages)150°C

Lead Temperature (Soldering, 10 Seconds)300°C

Note 1. Exceeding these ratings could cause damage to the device.

Thermal Data

K Package:

Thermal Resistance-Junction to Case, θ_{JC} 3.0°C/W Thermal Resistance-Junction to Ambient, θ_{JA} 35°C/W

T Package:

Thermal Resistance-Junction to Case, θ_{JC} 15°C/W Thermal Resistance-Junction to Ambient, θ_{JA} ... 120°C/W S Package:

Thermal Resistance-Junction to Case, θ_{JC} 3.5°C/W Thermal Resistance-Junction to Ambient, θ_{JA} 42°C/W

Note A. Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$

Note B. The above numbers for θ_{JC} are maximums for the limiting thermal resistance of the package in a standard mounting configuration. The θ_{JA} numbers are meant to be guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

Recommended Operating Conditions (Note 2 & 3)

Input Voltage Range $(V_{OUT} + 3.5 \text{ V})$ to 37 V

Operating Junction Temperature Range

SGR117A-55°C to 150°C

- Note 2. Range over which the device is functional.
- Note 3. These ratings are applicable for junction temperatures of less than 150°C.

Electrical Characteristics

(Unless otherwise specified, these specifications apply over full operating ambient temperatures for SGR117A with -55°C $\leq T_A \leq 125$ °C, $V_{IN} - V_{OUT} = 5.0$ V, and for $I_{OUT} = 500$ mA (K and IG), and $I_{OUT} = 100$ mA (T package). Although power dissipation is internally limited, these specifications are applicable for power dissipations of 2 W for the T package, and 20 W for the K and IG packages. I_{MAX} is 1.5 A for the K and IG packages and 500 mA for the T package. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

		PRE RAD PO			POS1	POST NEUTRON		
Parameter	Test Conditions	SGR117A			SGR117A			Units
i alametei	100t Conditions		Тур.	Max.	Min.	Тур.	Max.	Office
Reference Voltage	$I_{OUT} = 10 \text{ mA} \ T_{A} = 25^{\circ}\text{C}$	1.238	1.250	1.262	1.220		1.275	V
	$3 \text{ V} \le (\text{V}_{\text{IN}} - \text{V}_{\text{OUT}}) \le 40 \text{ V}, \text{ P} \le \text{P}_{\text{MAX}},$							
	10 mA \leq I _{OUT} \leq I _{MAX}	1.225	1.250	1.270	1.220	1.25	1.275	V
Line Regulation (Note 4)	$ 3 \text{ V} \le (\text{V}_{IN} - \text{V}_{OUT}) \le 40 \text{ V}, \text{ I}_{L} = 10 \text{ mA}$							
	$T_A = 25^{\circ}C$		0.005			0.01	0.03	%/V
	$T_A^{\circ} = T_{MIN}$ to T_{MAX}		0.01	0.02		0.02	0.05	%/V
Load Regulation (Note 4)	$10 \text{ mA} \le I_{\text{OUT}} \le I_{\text{MAX}}$							
	$V_{OUT} \le 5 \text{ V}, T_A = 25^{\circ}\text{C}$		5	15		5	50	mV
	$V_{OUT} \ge 5 \text{ V}, T_A = 25^{\circ}\text{C}$		0.1	0.3		0.1	1	%
	$V_{OUT} \le 5 \text{ V}$		20	50		20	50	mV
	$V_{OUT} \ge 5 V$		0.3	1		0.3	1	%
Thermal Regulation (Note 5)	$T_A = 25^{\circ}C$, 20 ms pulse		0.002	0.02		0.03	0.07	%/W
Ripple Rejection	V _{OUT} = 10 V, f =120 Hz							
	$C_{ADJ}^{OOT} = 1 \mu F, T_A = 25^{\circ}C$		65			65		dB
	$C_{ADJ}^{ADJ} = 10 \mu\text{F}$	66	80		66	80		dB
Adjust Pin Current			50	100		50	100	μΑ
Adjust Pin Current Change	10 mA $\leq I_{OUT} \leq I_{MAX}$, 2.5 V $\leq (V_{IN} - V_{OUT}) \leq 40 \text{ V}$		0.2	5		0.2	8	μA



POST NEUTRON

Electrical Characteristics (Continued)

SGR117A			SGR117A			Units
Min.	Тур.	Max.	Min.	Тур.	Max.	Ullila
	3.5	5		3.5	8	mA
1.5	2.2		1.5	2.2		Α

PRE RAD

Parameter	Test Conditions		SGR11/A		SGR11/A			Units
Farameter	rest conditions	Min.		Max.	Min.	Тур.	Max.	Ullits
Minimum Load Current	$(V_{IN} - V_{OUT}) = 40 \text{ V}$		3.5	5		3.5	8	mA
Current Limit	$(V_{IN} - V_{OUT}) \le 15 \text{ V}$							
	K, IG Packages	1.5	2.2		1.5	2.2		Α
	T Package	0.5	0.8		0.5	0.8		Α
	$(V_{IN} - V_{OUT}) = 40 \text{ V}, T_{J} = 25^{\circ}\text{C}$							
	K, IG Packages	0.3	0.4		0.3	0.4		Α
	T Package	0.15	0.2		0.15	0.2		Α
Temperature Stability (Note 5)			1	2				%
Long Term Stability (Note 5)	T _A = 125°C, 1000 Hours		0.3	1				%
RMS Output Noise (% of V _{OUT})	$T_A = 25^{\circ}C, 10 \text{ Hz} \le f \le 10 \text{ kHz} \text{ (Note 5)}$		0.001					%

Note 4. Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation.

Connection Diagrams and Ordering Information (See Notes Below)

Package	Part No.	Ambient Temperature Range	Connection Diagram
3-TERMINAL TO-3 METAL CAN K-PACKAGE	SGR117AK SGR117AK-883B	-55°C to 125°C -55°C to 125°C	ADJUSTMENT 1 2 CASE IS V _{OUT}
3-PIN TO-39 METAL CAN	SGR117AT	-55°C to 125°C	GND (3) (1) V _{IN} CASE IS GROUND
T-PACKAGE	SGR117AT-883B	-55°C to 125°C	
3-PIN HERMETIC TO-257	SGR117AIG-883B	-55°C to 125°C	V _N V _{OUT} ADJUST
IG-PACKAGE (Isolated)	SGR117AIG	-55°C to 125°C	

Note 1. Device leads are hot solder dipped with Sn63Pb37 solder.


Note 2. All parts are viewed from the top.

Note 5. These parameters, although guaranteed, are not tested in production.



Package Outline Dimensions

Controlling dimensions are in inches, metric equivalents are shown for general information.

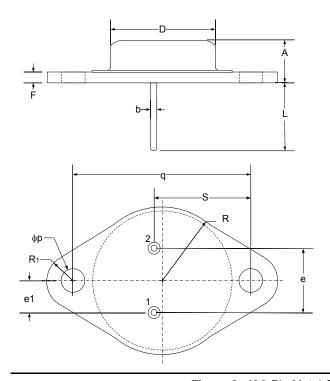


DIM	MILLIME	ETERS	INC	HES
DIN	MIN	MAX	MIN	MAX
Α	6.86	7.62	0.270	0.300
q	29.90	30.40	1.177	1.197
b	0.97	1.09	0.038	0.043
D	19.43	19.68	0.765	0.775
S	16.64	17.14	0.655	0.675
е	10.67	11.18	0.420	0.440
e1	5.21	5.72	0.205	0.225
F	1.52	2.03	0.060	0.080
фр	3.84	4.09	0.151	0.161
L	10.79	12.19	0.425	0.480
R1	3.33	4.78	0.131	0.188
R	12.57	13.34	0.495	0.525

Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

Figure 2 · K 3-Pin Metal Can TO-3 Package Dimensions

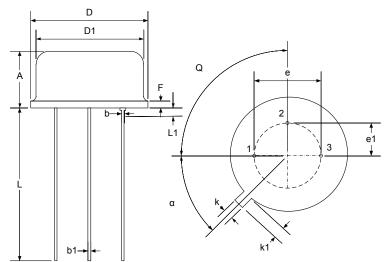

DIM	MILLIME	ETERS	INC	HES	
DIN	MIN	MAX	MIN	MAX	
Α	4.19	4.70	0.165	0.185	
b	0.41	0.48	0.016	0.019	
b1	0.41	0.53	0.016	0.021	
D	8.89	9.40	0.350	0.370	
D1	8.13	8.51	0.320	0.335	
е	5.08 BSC		0.200 BSC		
e1	2.54	TYP	0.100) TYP	
F	-	1.02	-	0.040	
k	0.71	0.86	0.028	0.034	
k1	0.74	1.14	0.029	0.045	
L	12.70	14.48	0.500	0.570	
L1	-	1.27	-	0.050	
Q	90°	TYP	90° TYP		
α	45°	TYP	45° TYP		


Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

Figure 3 - T 3-Pin Metal Can TO-39 Package Dimensions



Package Outline Dimensions (continued)

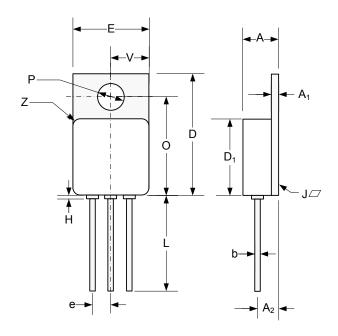

DIM	MILLIM	ETERS	Inc	HES	
DIN	MIN	MAX	MIN	MAX	
Α	4.70	5.21	0.185	0.205	
A_1	0.89	1.14	0.035	0.045	
A_2	2.92	3.18	0.115	0.125	
b	0.71	.081	0.027	0.032	
D	16.38	16.76	0.645	0.660	
D_1^*	10.41	10.92	0.410	0.430	
е	2.54	BSC	0.100	BSC	
E*	10.41	10.67	0.410	0.420	
Н	-	0.50	-	0.020	
L	12.70	-	0.500	-	
0	13.39	13.64	0.527	0.537	
Р	3.56	3.81	0.140	0.150	
J	-	0.10	_	0.004	
V	5.13	5.38	0.202	0.212	
Z	1.40	TYP	0.055 TYP		

^{*}Excludes Weld Fillet Around Lid.

Note:

Dimensions do not include protrusions; these shall not exceed 0.155mm (.006") on any side. Lead dimension shall not include solder coverage.

Figure 4 - IG 3-Pin Hermetic TO-257 Package Dimensions



Microsemi Corporate Headquarters One Enterprise, Aliso Viejo, CA 92656 USA

Within the USA: +1 (800) 713-4113 Outside the USA: +1 (949) 380-6100 Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

E-mail: sales.support@microsemi.com

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.