

---

# Designing with Blocks in the Enhanced Constraint Flow User Guide SmartFusion2, IGLOO2, and RTG4 Libero SoC v11.8 SP1, SP2, and SP3

NOTE: PDF files are intended to be viewed on the printed page; links and cross-references in this PDF file may point to external files and generate an error when clicked. **View the online help included with software to enable all linked content.**

This User Guide is for designing with blocks in the Enhanced Constraint Flow. If you use the Classic Constraint Flow, refer to *Designing with Blocks in the Classic Constraint Flow User Guide*.





**Microsemi Corporate Headquarters**  
One Enterprise, Aliso Viejo,  
CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Fax: +1 (949) 215-4996  
Email:  
[sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

©2017 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

#### About Microsemi

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

5-02-00742-1/07.17

# Table of Contents

<b>SmartFusion2, IGLOO2, and RTG4 Block Flow .....</b>	<b>7</b>
Block Features .....	7
HDL Supported .....	7
Synthesis Tools Supported .....	7
Nested Blocks .....	7
<b>Creating Blocks - Options and Settings .....</b>	<b>7</b>
Synthesis Tool Settings .....	8
Synthesis .....	8
Publish Options/Settings .....	8
<b>Publishing Blocks After Synthesis or Layout .....</b>	<b>9</b>
Publish After Synthesis .....	9
Publish After Layout .....	9
Published Content .....	9
<b>Guidelines for Creating Blocks .....</b>	<b>9</b>
Macros/IPs Not Supported in Blocks .....	9
Synthesis Tool and Globals Management .....	9
Place and Route and Globals Management .....	10
Blocks and DRC .....	10
Blocks and Floorplanning .....	10
Architecture Limitations - Managing Blocks and Globals .....	11
<b>Instantiating Blocks in your Top-Level Design .....</b>	<b>11</b>
Import the Block .....	12
Create a Top Level Design that Uses Blocks .....	13
Constraints Management .....	13
<b>Hierarchical Structure Resolution in Top Level Projects .....</b>	<b>14</b>
Duplicate Block Definition .....	14
Conflicting Definitions in top.v and Your Imported Block File .....	14
Resolving top.v and Block Instantiations .....	14
<b>EDIF Netlist in the Top Level Design .....</b>	<b>14</b>
<b>Synthesis .....</b>	<b>15</b>
<b>Resolving Place and Route Conflicts .....</b>	<b>15</b>
Synthesis Options to Resolve Place and Route Conflicts .....	15



**Block PDC Commands .....17**

**Publish Block - Configuration Options .....21**

**Product Support .....22**



## SmartFusion2, IGLOO2, and RTG4 Block Flow

Block Flow is a bottom-up design methodology that enables you to use design blocks (“components” in generic terms) as building blocks for your top-level design. These building blocks may have already completed layout and been optimized for timing and power performance for a specific Microsemi device. Using these blocks as part of your top-level design can cut down design time as well as improve timing and power performance. Block advantages include:

- Focus on the timing of critical blocks and ensure the timing across the blocks meets requirements before proceeding to integrate your blocks at the top level.
- Changes in other blocks have no impact on your own block; you can re-use your block without re-optimizing for timing closure.
- The block can be re-used in multiple designs.
- Shorter verification time; you need to re-verify only the portion of the design that has changed.

### Block Features

- A Block can be synthesized, simulated, and placed-and-routed the same way as a regular design.
- You can lock the placement and routing of the Block to ensure repeatable performance.
- Performance, placement and routing can be fixed absolutely; however these rules can be relaxed gradually, if necessary, to ensure that you can integrate the Block into your top level project.

Use blocks when:

- You have multiple team members working on different parts of the same design.
- The design is congested (uses 90% or more of the resources on a given die).
- You have difficulty meeting timing by doing the design in its entirety. Blocks enable you to compartmentalize the design and optimize sections before you optimize the entire design.
- You want to re-use some elements of your design.
- You want to use the identical elements multiple times in a single design.
- You want to make small changes in your design and expect to keep most of the design unchanged with guaranteed performance.

You cannot use Blocks with all families, they are family and die specific; if your Block has I/Os it is also package specific.

### HDL Supported

- Verilog
- VHDL

### Synthesis Tools Supported

- Synplify Pro

### Nested Blocks

Nested blocks (blocks instantiated inside other blocks) are supported. When publishing, only one file will be published that contains all the required information (including the nested block).

## Creating Blocks - Options and Settings

To enable Block Creation for a new project, from the **Project** menu, choose **New Project**. Check the **Enable Block Creation** checkbox. Select the Enhanced Constraint Flow for the new project.

In an existing project, from the **Project** menu, choose **Project Settings**. Click **Design Flow** and check the **Enable Block Creation** checkbox. The existing project must be using the Enhanced Constraint Flow.

## Synthesis Tool Settings

In Synplify Pro, the I/O Insertion option is disabled when the block is synthesized. Libero automatically disables I/O insertion for you before invoking Synplify Pro.

## Synthesis

During Synthesis, Libero SoC software adds BLOCK\_INTERFACE\_I\* instances to the block. These instances are virtual buffers added to:

- Improve timing values for the block.
- Provide you with a clear interface to floorplan
- Help with clustering constraints

The BLOCK\_INTERFACE\_I\* instances are removed when the block is published.

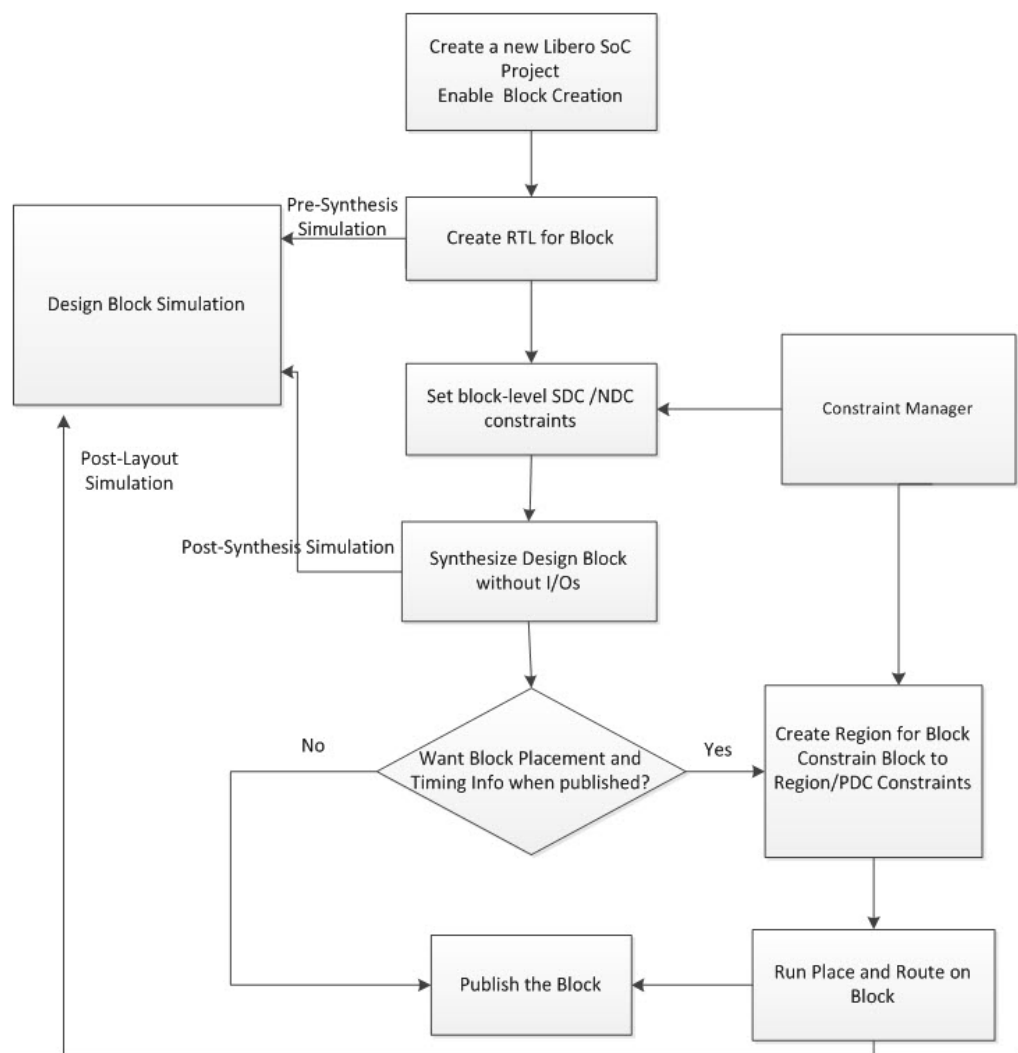


Figure 1 · Creating and Publishing Design Blocks

## Publish Options/Settings

Use the [Publish Block – Configuration Options dialog box](#) to configure the block for Publication.

## Publishing Blocks After Synthesis or Layout

You can publish your block after Synthesis or Layout.

### Publish After Synthesis

If you publish a block after Synthesis but before Layout, a netlist is exported for the block when published. No Place and Route information or Region Constraint information is included in the block when published. A Warning message appears when you publish a block before Place and Route.

### Publish After Layout

If you publish a block after Layout, the Placement, Routing and/or Region Constraint information will be published along with the netlist. You can always open the configurator and change the options to publish what you want. All macros must be locked or assigned to regions in order to publish the Placement information.

### Published Content

Libero exports the <design>.cxz file to <project folder>/designer/<design\_block\_name>/export folder when a block is published. The <design>.cxz file is a zip file that contains the following files:

- <design\_block\_name>\_syn.v | <design\_block\_name>\_syn.vhd -- A timing shell file passed to synthesis tools when the top-level design is synthesized. The block is marked and treated as a black box when the top-level design is synthesized.
- <design\_block\_name>\_sim.v | <design\_block\_name>\_sim.vhd -- A structural HDL netlist for postsynthesis simulation of the block.
- header\_report.log - A log file that contains Header Information on what and how a block is published , including the options you selected to configure the publication.
- <design\_block\_name>\_compile\_netlist\_resources.xml -- Compile Report detailing resource usage, device info, and a list of high-fanout nets.
- <design\_block\_name>\_gp\_report.xml -- Global Placement and Routing Report
- <design\_block\_name>\_compile\_netlist\_combinational\_loops.xml -- Combinational Loops Report
- <design>.cdb – Internal proprietary file containing the optimized netlist , placement, routing or timing constraint information
- <design\_block\_name>.sdc - contains the SDC constraints for the block to be used for Timing Verifications.

The <design\_block\_name>.cxz file is your published block. You can move it to another folder, transfer it to other team members, etc. This is the file you import into your top-level design when you want to instantiate the block.

## Guidelines for Creating Blocks

### Macros/IPs Not Supported in Blocks

When creating a Block for instantiation in a top-level design, please note that the following types of macros are not allowed: MSS, SERDESIF, FDDR, FLASH\_FREEZE, SYSRESET, UJTAG.

### Synthesis Tool and Globals Management

The synthesis tool may promote all clocks to globals. Keep in mind the number of globals you need in your top level design and the number of globals allowed in the device (8 or 16 depending on device size) you are targeting. You may need to reduce or limit the number of globals in your block by adding row globals or plan to share globals in the top-level design with the block. To add a row global, you can add it directly to your HDL (RCLKINT).



## Place and Route and Globals Management

The Place and Route tool has an option for you to limit the number of row-globals used for block creation.

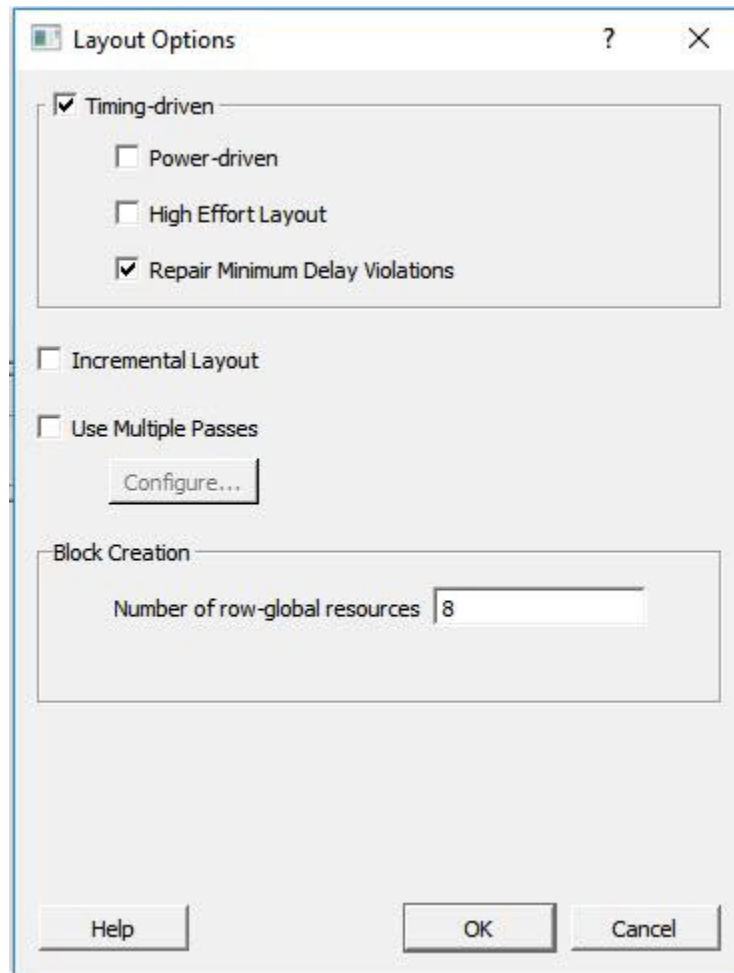


Figure 2 · Place and Route Block Creation Option

This option is available only when the Block Creation option is turned on (**Project > Project Settings > Design Flow > Enable Block Creation**).

To use this option, from the Design Flow window, right-click **Place and Route** and choose **Configure Options**. The Layout Options dialog box appears and displays the default number of row-global resources for the technology family. Enter a value to restrict the number of row-global resources available in every half-row of the device. During Place and Route of the block, the tool will not exceed this capacity on any half-row. The default value displayed is the maximum number of row-globals. If you enter a value lower than the maximum capacity (the default), the layout of the block will be able to integrate with the rest of the design if the remaining row-global capacity is consumed.

## Blocks and DRC

Regular DRC rules are applied to blocks as in the regular Libero design flow. For example, some DRC rules assume that some pins must be connected to the power nets. These rules are enforced on the blocks in the block flow just as in the regular design flow.

## Blocks and Floorplanning

When creating a block, floorplanning is essential if you plan to publish placement information. Before running Layout on the block, you must floorplan the design block. You can use Chip Planner or PDC commands for floorplanning.

If you do not create a region and constrain the Block to the region (floorplanning ) or lock the macros before place and route, a Warning message appears when you publish the Block. It warns you that not all macros in the Block have been constrained to regions or locked and therefore only your design netlist is exported when the Block is published.

### *Floorplanning with PDC Commands*

You can use the [define\\_region](#) PDC command to create a rectangular or rectilinear region, and then use the [assign\\_region](#) PDC command to constrain all the macros to that region. Refer to the Libero Help for the [command syntax](#).

Floorplanning reduces the risk of placement conflicts of the blocks at the top level.

If you do not constrain your Block placement, its components may be placed anywhere on the die.

It is also important to consider the placement of all Block Interface Instances at the boundaries of Block regions. This facilitates the interconnection of the Block to the top-level design. If the Block is highly optimized (densely packed) there may be no routing channels available to connect to any internal Block Interface Instances. Placing all interfaces at Block boundaries helps you eliminate routing congestion and failure.

### *Floorplanning with Chip Planner*

Refer to Chapter 4 of [Chip Planner](#) for details on how to use the Chip Planner for floorplanning.

## Architecture Limitations - Managing Blocks and Globals

Architecturally, the silicon has 8 or 16 globals per device, depending on the device size. If you create a block for use in a top level design and you know that the top level design will use close to the maximum number of Globals for the device, it is good practice to minimize the number of Globals when you create the block. Examine the Global Report to see how many Globals have been used for the block. To reduce the number of Globals used in the block, you may consider clock sharing and the use of Row Globals for the block.

To add an internal global on a port, you can use either the Synplify constraints editor (SCOPE) or an SDC file.

For example, to add a CLKINT after a CLK port, the command is:

```
define_attribute {n:CLK} syn_insert_buffer {CLKINT}
```

## Instantiating Blocks in your Top-Level Design

You may instantiate multiple instances of the same block or multiple blocks in the top-level design.

Microsemi recommends that you create a new project for your top-level design. To do so:

1. From the **Project** menu choose **New Project**.
2. Deselect the **Enable Designer Block Creation** checkbox.
3. Choose the **Family/Die/Package** for the new project for the top-level as follows :
  - If the block is a Netlist only and was not published with place and route information, choose the same **Family** as the block for the new project. Choose any Die and Package.
  - If the block contains placement information, choose the same **Family** and **Die** as the block for the new project, and choose any Package.
  - If the Netlist contains I/O and Placement Information, choose the same **Family**, **Die** and **Package** as the block for the new project.
4. Choose the Enhanced Constraint Flow for the top level design project.

**Note:** A top level project created for the Enhanced Constraint Flow can only import and instantiate blocks created and published from an Enhanced Constraint Flow project. It cannot import nor instantiate blocks published from the Classic Constraint Flow project. Likewise, a top level project created for the Classic Constraint Flow cannot import nor instantiate blocks created and published from an Enhanced Constraint Flow project.

## Import the Block

1. From the **File** menu choose **Import > Blocks**.
2. Browse to the directory that contains your <design\_block\_name>.cxz file and select it.
3. Click **Open**.

<design\_block\_name> is imported into the top\_level project. Version control is not supported for imported blocks. If you import the same block twice, the existing block is overwritten by the new one.

The files will be imported under <design>\component\work\<design\_block\_name>.

Review the files in the above directory to view Block Reports.

## Create a Top Level Design that Uses Blocks

Use SmartDesign or HDL to create your top level design. If you use HDL you can create HDL for the top level or import a top-level HDL file.

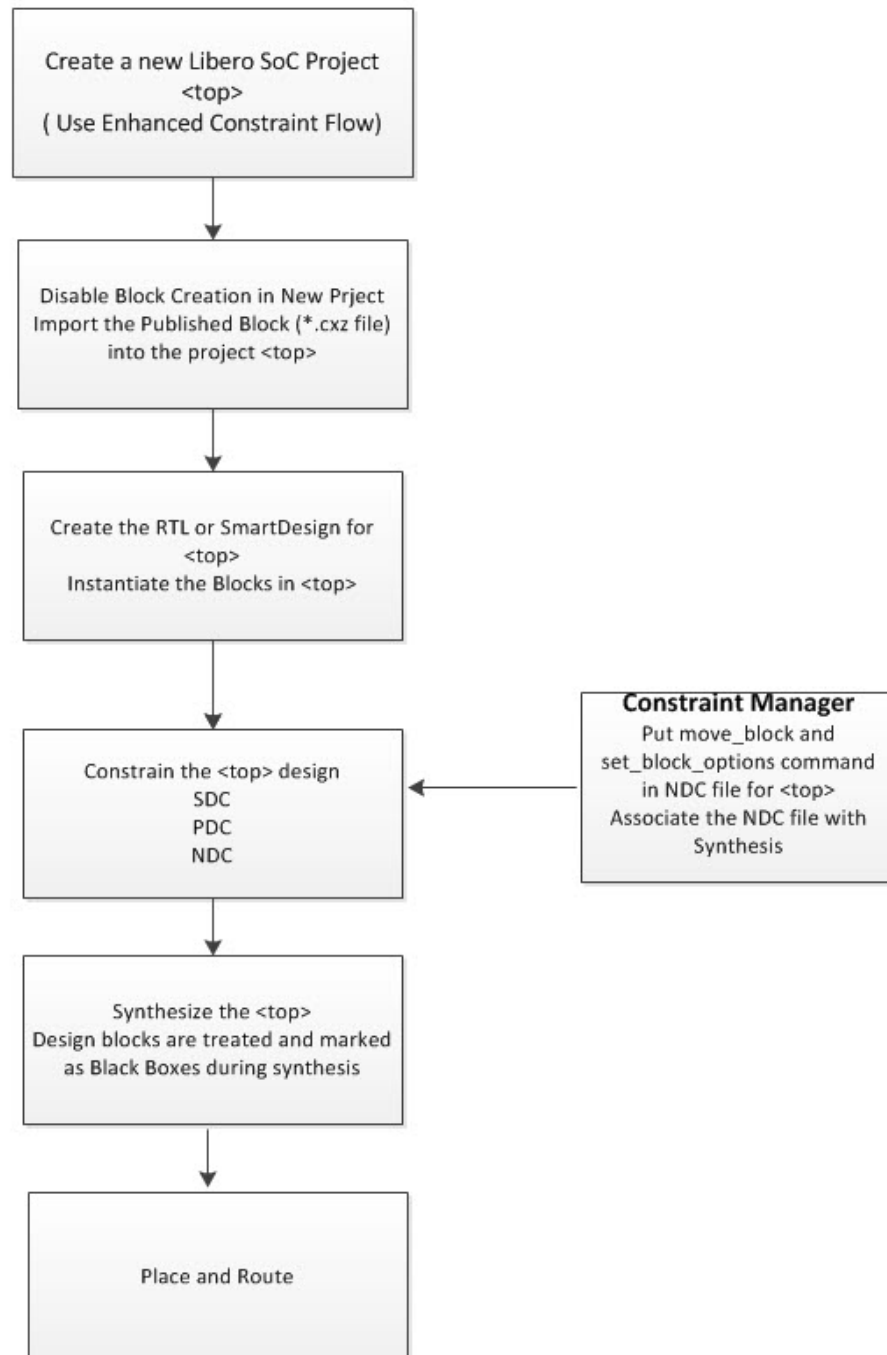


Figure 3 · Instantiating Blocks in your Top Level Design

## Constraints Management

When a block with PDC constraints are imported into the top level design, the block's PDC constraints are captured and stored in two files:

- <top\_level\_module>.block.io.pdc for the IO PDC constraints
- <top\_level\_module>.block.fp.pdc for the floorplanning PDC constraints.

The <top\_level\_module>.block.io.pdc is displayed in the I/O Attributes tab of the [Constraint Manager](#) on top of any other IO PDC files.

The <top\_level\_module>.block.fp.pdc is displayed in the Floor Planning tab of the [Constraint Manager](#) on top of any other floorplanning PDC files.

**Note:** Do not modify these block PDC files at the top level. If these PDC files need to be modified, go back to the project where the blocks are created and published. Make the floorplanning modifications and publish the block. Re-import the block into the top level. You may need to remove any duplicate blocks, if any, at the top level after the re-import.

## Hierarchical Structure Resolution in Top Level Projects

If you import multiple conflicting definitions for your \*.v files, Libero resolves the conflicts as shown below.

### Duplicate Block Definition

If you import two versions of your block file you must choose which one you want to use. For example:

1. Import top.v and block1.v files as HDL (**File > Import HDL Source Files**) into the top level project.
2. Import <block1> (**File > Import > Blocks**).

Libero recognizes a duplicate definition of <block1>; one from the HDL and another in the imported block file. The Design Hierarchy tab shows a <block1>.cdf and <block1>.v file under Duplicate Modules; Libero uses the HDL <block1> by default.

To override the default behavior and select the Block definition, right-click the <block1>.cdf file and choose **Use This File**. When you update the behavior the Block icon appears in the Design Hierarchy.

### Conflicting Definitions in top.v and Your Imported Block File

You can introduce a conflict if you import a top.v file and a block file. Libero does not support HDL definition of low level blocks inside top level HDL files and subsequent importing of block files. For example, the following will cause an error:

1. Import a top.v file (**File > Import HDL Source Files**) that contains a definition for <top> and a module definition for <block1>.
2. Import the block <block1> (**File > Import > Blocks**).

Libero passes two duplicate files to your synthesis tool because the definition for <block1> is duplicated. To continue, you must remove the definition of <block1> from top.v and then re-import it.

### Resolving top.v and Block Instantiations

Libero integrates your top.v file and block file if there is no definition for the block file in top.v. For example:

1. Import your top.v (**File > Import HDL Sources Files**) that contains instantiations but no definition of <block1>.
2. Import <block1> (**File > Import > Blocks**).

Libero resolves the hierarchy for you and puts <block1> under top.v.

## EDIF Netlist in the Top Level Design

If the Top Level design is in EDIF, you must convert the EDIF to HDL and then import the HDL into Libero. To convert the Top Level EDIF to HDL:

1. Write a Tcl script. For example:

```
set_device -fam SmartFusion2
read_edif -file {E:\top.edn}
```

```
write_verilog -file {E:\top.v} -skip_empty_modules 1
write_vhdl -file {E:\top.vhd}
## -skip_empty_modules 1 is to instruct the tool not to insert module ## definition for
the empty modules in the HDL created.
```

2. From the Windows Command Prompt or the Linux shell, run rwnetlist as follows (this executable is located in the same location as Libero):

```
rwnetlist --script "E:/run_export_netlist.tcl"
```

## Synthesis

Libero passes the block timing to your synthesis tool when the top level is synthesized. This timing shell enables the synthesis tool to produce more accurate timing numbers for top level synthesis.

The timing shell also instructs the synthesis tool to treat the design block as a black box; this is done automatically - no action is required.

Use the Synthesis tool options (**Design Flow > Synthesize > Configure Options**) for "Resolving Place and Route Conflicts" on page 15 of blocks.

## Resolving Place and Route Conflicts

To resolve Place and Route conflicts at the top-level:

- Examine the <design\_block\_name>\_compile\_netlist\_resources.xml Report. Identify the cause of the problem and manually place and constrain the placement with [Chip Planner](#) or with PDC commands.
- If you instantiate a block (published with placement) multiple times then placement between multiple block instances will overlap. To remove overlapping, move the block placement of one or more instances to another area using the PDC command move\_block. Put the move\_block command inside the NDC file and associate the NDC file with Synthesis (**Constraint Manager> Netlist Attributes**)
- The software enforces Global sharing. If there is a Global driving a CLKINT in the block it will be deleted. Reduce the number of Globals at the top level by sharing Global Clock resources. Globals in the Blocks may also be re-routed (not preserved).

## Synthesis Options to Resolve Place and Route Conflicts

If there are multiple blocks instantiated in your top level design, the software uses the Synthesis Options to resolve the conflicts. These options appear only if there are blocks in your design. Use the synthesis options (Design Flow > Synthesize > Configure Options) to resolve Placement and/or Routing conflicts.

### Placement

**Error if conflict** - The Layout tool errors out if any instance from a designer block is unplaced. This is the default option.

#### Resolve conflict


- **Keep non-conflicting placement** - If some instances get unplaced for any reason, the non-conflicting elements remaining are preserved but not locked (you can move them).
- **Keep and lock non-conflicting placement** - If some instances get unplaced for any reason, the remaining non-conflicting elements are preserved and locked.
- **Discard placement from all blocks** - Placement information will be discarded from all blocks even if there is no conflict.

### Routing

**Error if conflict** - The Layout tool errors out if any preserved net routing in a designer block is deleted.

### Resolve conflict

- **Keep non-conflicting routing-** If a nets' routing is removed for any reason, the routing for the non-conflicting nets is preserved but not locked (so that they can be rerouted). This is the default option.
- **Keep and lock non-conflicting routing-** If the routing is removed for any reason, the remaining non-conflicting nets are preserved and locked; they cannot be rerouted. This is the default option.
- **Discard routing from all blocks –** Routing information will be discarded from all blocks even if there is no conflict.

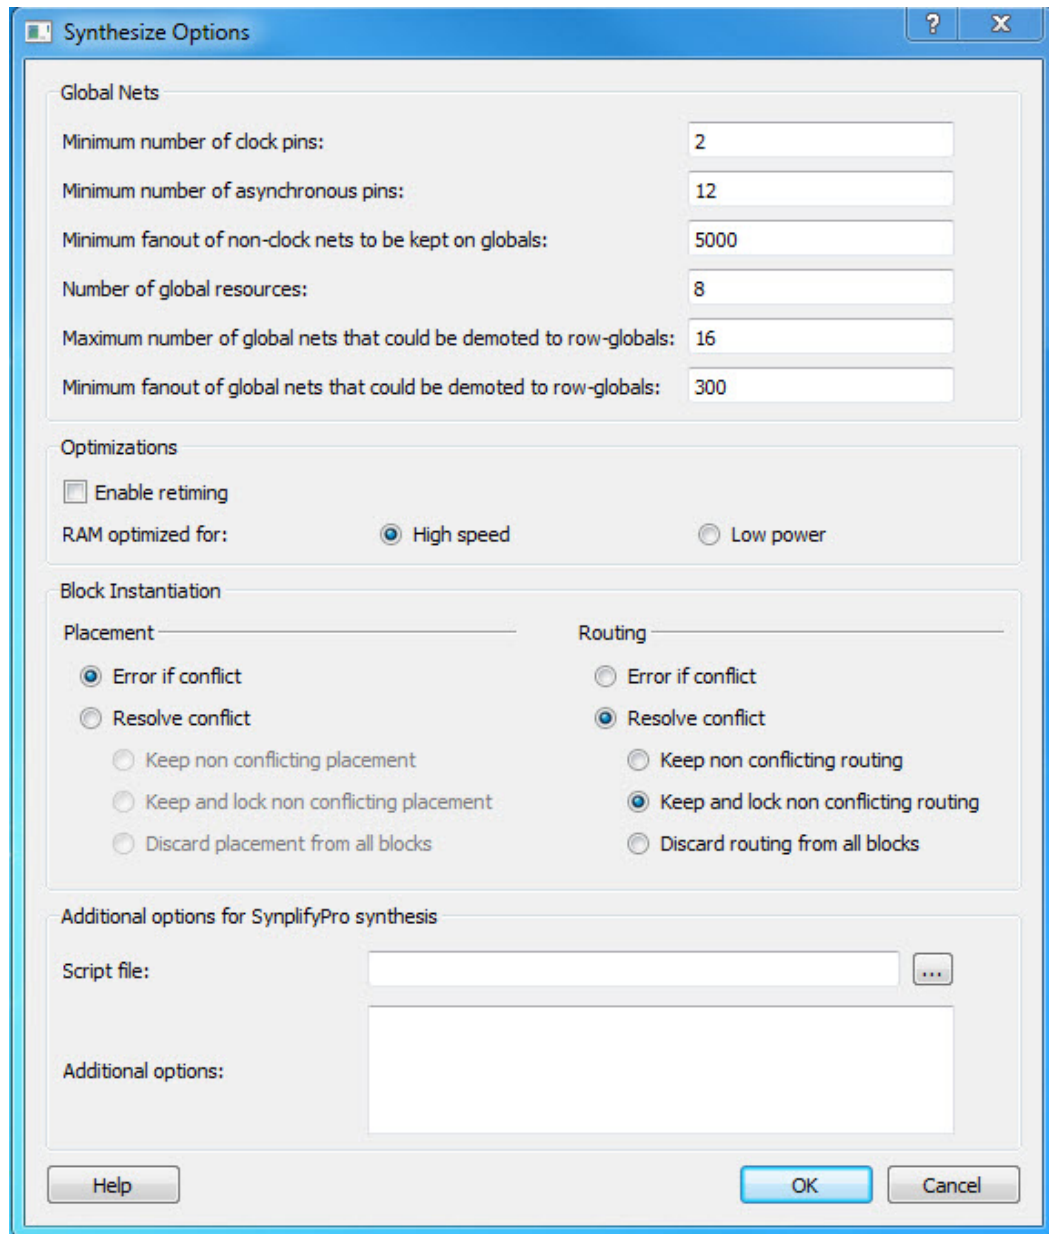

The Synthesize Options dialog box is divided into several sections:

- Global Nets:** Contains six input fields for configuring global net parameters:
  - Minimum number of clock pins: 2
  - Minimum number of asynchronous pins: 12
  - Minimum fanout of non-clock nets to be kept on globals: 5000
  - Number of global resources: 8
  - Maximum number of global nets that could be demoted to row-globals: 16
  - Minimum fanout of global nets that could be demoted to row-globals: 300
- Optimizations:**
  - ☐ Enable retiming
  - RAM optimized for: ☒ High speed ☐ Low power
- Block Instantiation:** Divided into Placement and Routing sub-sections.
  - Placement:**
    - ☒ Error if conflict
    - ☐ Resolve conflict
      - ☐ Keep non conflicting placement
      - ☐ Keep and lock non conflicting placement
      - ☐ Discard placement from all blocks
  - Routing:**
    - ☐ Error if conflict
    - ☒ Resolve conflict
      - ☐ Keep non conflicting routing
      - ☒ Keep and lock non conflicting routing
      - ☐ Discard routing from all blocks
- Additional options for SynplifyPro synthesis:**
  - Script file: [Text field with browse button]
  - Additional options: [Large text area]

Buttons at the bottom: Help, OK, Cancel.

Figure 4 · Synthesis Options Dialog Box

## Block PDC Commands

[move\\_block](#) and [set\\_block\\_options](#) are two PDC commands available specifically for working with design blocks at the top level.

Use the [move\\_block](#) and [set\\_block\\_options](#) commands to make changes in your Top-Level design. See the respective help topics for more information.

In the top level design, put the [move\\_block](#) and [set\\_block\\_options](#) commands in an NDC file (**Design Flow Window > Manage Constraints > Open Manage Constraints View > Netlist Attributes > New > Create New Compile Netlist Constraints NDC**) and associate the NDC file with Synthesis.



## move\_block

PDC command; moves a design block from its original, locked placement by preserving the relative placement between the instances. You can move the Block to the left, right, up, or down.

```
move_block -inst_name instance_name -up y -down y -left x -right x -non_logic value
```

### Arguments

-inst\_name *instance\_name*

Specifies the name of the instance to move. If you do not know the name of the instance, run a Compile report or look at the names shown in the Block tab of the [Chip Planner](#).

-up *y*

Moves the block up the specified number of rows. The value must be a positive integer.

-down *y*

Moves the block down the specified number of rows. The value must be a positive integer.

-left *x*

Moves the block left the specified number of columns. The value must be a positive integer.

-right *x*

Moves the block right the specified number of columns. The value must be a positive integer.

-non\_logic *value*

Specifies what to do with the non-logic part of the block, if one exists. The following table shows the acceptable values for this argument:

Value	Description
move	Move the entire block.
keep	Move only the logic portion of the block (COMB/SEQ) and keep the rest locked in the same previous location, if there is no conflict with other blocks.
unplace	Move only the logic portion of the block (COMB/SEQ) and unplace the rest of it, such as I/Os and RAM.

### Supported Families

SmartFusion2, IGLOO2, and RTG4

### Description

This command moves a block from its original, locked position to a new position.

You can move the entire block or just the logic part of it. You must use the -non\_logic argument to specify what to do with the non-logic part of the block. You can find placement information about the block in the Block report. From the **Tools** menu in the designer software, choose **Reports > Block > Interface** to display the report that shows the location of the blocks.

The -up, -down, -left, and -right arguments enable you to specify how to move the block from its original placement. You cannot rotate the block, but the relative placement of macros within the block will be preserved and the placement will be locked. However, routing will be lost. You can either use the ChipPlanner tool or run a Block report to determine the location of the block.

The -non\_logic argument enables you to move a block that includes non-logic instances, such as RAM or I/Os that are difficult to move. Once you have moved a part of a block, you can unplace the remaining parts of the block and then place them manually as necessary.

**Note:** Note: Microsemi recommends that you move the block left or right by increments of 12. If not, placement may fail because it violates clustering constraints. Also, Microsemi recommends that you move the block up or down by increments of three.

## Exceptions

- You must import this PDC command as a source file, not as an auxiliary file.
- You must use this PDC command if you want to preserve the relative placement and routing (if possible) of a block you are instantiating many times in your design. Only one instance will be preserved by default. To preserve other instances, you must move them using this command.

## Examples

The following example moves the entire block (instance name instA) 12 columns to the right and 3 rows up::

```
move_block -inst_name instA -right 12 -up 3 -non_logic move
```

The following example moves only the logic portion of the block and unplaces the rest by 24 columns to the right and 6 rows up.

```
move_block -inst_name instA -right 24 -up 6 -non_logic unplace
```

### See Also

[set\\_block\\_options](#)

[PDC Reference](#)

## set\_block\_options

PDC command; overrides the compile option for placement or routing conflicts for an instance of a block.

```
set_block_options -inst_name instance_name -placement_conflicts value -routing_conflicts
value
```

### Arguments

-inst\_name *instance\_name*

Specifies the block instance name. If you do not know the name of the instance, run a Block Report (**Design > Reports > Blocks > Interface**) or look at the names shown in the Block tab of the [Chip Planner](#).

-placement\_conflicts *value*.

Specifies what to do when the software encounters a placement conflict. The following table shows the acceptable values for this argument:

Value	Description
error	Compile errors out if any instance from a Designer block becomes unplaced or its routing is deleted. This is the default compile option.
resolve	If some instances get unplaced for any reason, the non-conflicting elements remaining are also unplaced. Basically, if there are any conflicts, nothing from the block is kept.
keep	If some instances get unplaced for any reason, the non-conflicting elements remaining are preserved but not locked. Therefore, the placer can move them into another location if necessary.
lock	If some instances get unplaced for any reason, the non-conflicting elements remaining are preserved and locked.
discard	Discards any placement from the block, even if there are no conflicts.

-routing\_conflicts *value*

Specifies what to do when the software encounters a routing conflict. The following table shows the acceptable values for this argument:

Value	Description
error	Compile errors out if any route in any preserved net from a Designer block is deleted.
resolve	If a route is removed from a net for any reason, the routing for the non-conflicting nets is also deleted. Basically, if there are any conflicts, no routes from the block are kept.
keep	If a route is removed from a net for any reason, the routing for the non-conflicting nets is kept unlocked. Therefore, the router can re-route these nets.
lock	If routing is removed from a net for any reason, the routing for the non-conflicting nets is kept as locked, and the router will not change them. This is the default compile option.

Value	Description
discard	Discards any routing from the block, even if there are no conflicts.

## Supported Families

SmartFusion2, IGLOO2, and RTG4

## Description

This command enables you to override the compile option for placement or routing conflicts for an instance of a block.

## Exceptions

You must import this PDC command as a source file, not as an auxiliary file.

If placement is discarded, the routing is automatically discarded too.

## Examples

This example makes the designer software display an error if any instance from a block becomes unplaced or the routing is deleted:

```
set_block_options -inst_name instA -placement_conflicts ERROR -routing_conflicts ERROR
```

### See Also

[move\\_block](#)

[PDC Reference](#)

## Publish Block - Configuration Options

To view this dialog box you must first Enable Block Creation in the [Libero SoC Project Settings](#) or [New Project Creation Wizard](#). After Block Creation is enabled Publish Block appears in the Design Flow window. Expand **Publish Design**, right-click **Publish Block** and choose **Export**.

### Publish Block Configuration

**Publish Placement**- Check this box to publish the placement information for the Block. Note that you must assign all macros to regions or lock them in order to Publish Placement.

If checked, the published Block can only be instantiated and used in a top level design with the same family and device. If the Block contains I/Os, the published Block can only be instantiated and used in a top level design with the same family, device and package.

If unchecked, only a netlist is published for the block. The published block can be instantiated and used in a top level design for any device and package in the same device family as the block.

**Publish Routing** - Check this box to retain the routing information with the block when published.

**Publish Region** - Check this box to retain the region constraint information with the block when published.

### Language

Select your Block Hardware Description Language (Verilog or VHDL). The default is the Preferred HDL type set in your [Project Settings](#).

---

# Product Support

---

Microsemi SoC Products Group backs its products with various support services, including Customer Service, Customer Technical Support Center, a website, electronic mail, and worldwide sales offices. This appendix contains information about contacting Microsemi SoC Products Group and using these support services.

## Customer Service

Contact Customer Service for non-technical product support, such as product pricing, product upgrades, update information, order status, and authorization.

From North America, call **800.262.1060**

From the rest of the world, call **650.318.4460**

Fax, from anywhere in the world **650. 318.8044**

## Customer Technical Support Center

Microsemi SoC Products Group staffs its Customer Technical Support Center with highly skilled engineers who can help answer your hardware, software, and design questions about Microsemi SoC Products. The Customer Technical Support Center spends a great deal of time creating application notes, answers to common design cycle questions, documentation of known issues and various FAQs. So, before you contact us, please visit our online resources. It is very likely we have already answered your questions.

## Technical Support

For Microsemi SoC Products Support, visit <http://www.microsemi.com/products/fpga-soc/design-support/fpga-soc-support>.

## Website

You can browse a variety of technical and non-technical information on the Microsemi SoC Products Group home page, at <http://www.microsemi.com/soc/>.

## Contacting the Customer Technical Support Center

Highly skilled engineers staff the Technical Support Center. The Technical Support Center can be contacted by email or through the Microsemi SoC Products Group website.

### Email

You can communicate your technical questions to our email address and receive answers back by email, fax, or phone. Also, if you have design problems, you can email your design files to receive assistance. We constantly monitor the email account throughout the day. When sending your request to us, please be sure to include your full name, company name, and your contact information for efficient processing of your request.

The technical support email address is [soc\\_tech@microsemi.com](mailto:soc_tech@microsemi.com).

### My Cases

Microsemi SoC Products Group customers may submit and track technical cases online by going to [My Cases](#).

### Outside the U.S.

Customers needing assistance outside the US time zones can either contact technical support via email ([soc\\_tech@microsemi.com](mailto:soc_tech@microsemi.com)) or contact a local sales office. Visit [About Us](#) for [sales office listings](#) and [corporate contacts](#).

## ITAR Technical Support

For technical support on RH and RT FPGAs that are regulated by International Traffic in Arms Regulations (ITAR), contact us via [soc\\_tech@microsemi.com](mailto:soc_tech@microsemi.com). Alternatively, within My Cases, select **Yes** in the ITAR drop-down list. For a complete list of ITAR-regulated Microsemi FPGAs, visit the ITAR web page.